


Thermafiber® Industrial Insulation



Semi-flexible Metal Mesh Blankets are designed for use in high temperature applications on boilers, tanks, vessels, ducts, large pipes and other cylindrical surfaces.

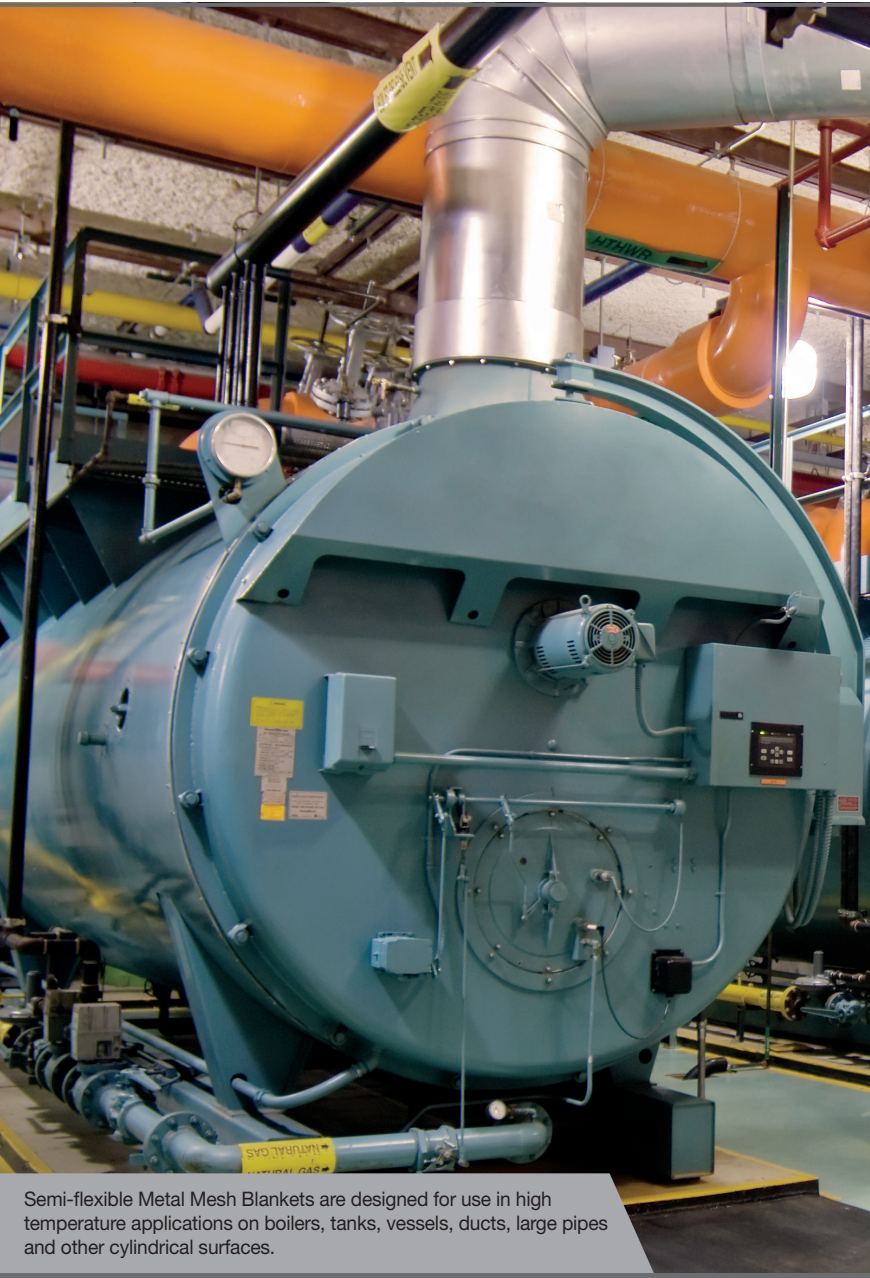

Metal Mesh Blankets are available with galvanized metal mesh or stainless steel wire mesh stitched to the blanket for exceptional durability. Wire mesh can be applied to one or both sides of the blanket.

Metal Mesh Blankets

- + Excellent thermal performance
- + Non-combustible, non-deteriorating, & inorganic
- + Flexible insulation ideal for cylindrical surfaces
- + Engineered for high temperature applications (up to 1200°F, 649°C)
- + Non-corrosive
- + Controls noise and sound

Minimum
70%
Recycled
Content



Thermafiber®



Made in the USA

Thermafiber® Industrial Insulation

Description:

Thermafiber Metal Mesh Blankets are made from preformed mineral wool insulation that is stitched to various metal facings. The flexible blankets are easy to cut, install, and form around curved surfaces or irregular shapes. Widely used for insulating utility boilers, ducts, precipitators, tanks, expansion joints, cylindrical refinery applications, power and process equipment, and other industrial applications. Metal Mesh blankets are a durable and economical solution for multiple applications where thermal shock and vibration are present.

Product Options:

Multiple metal facings are available on one or both sides of Metal Mesh Blankets. Custom combinations of facings are available upon request.

- Galvanized Hex Wire Mesh
- Stainless Steel Hex Wire Mesh
- Recycled Content Options¹: Standard Fiber 70%

¹ Recycled content options other than standard must be specified at time of order

Installation:

Metal Mesh Blankets should be mechanically fastened to the hot surface needing insulation. For cylindrical surfaces, metal angles, welded insulation pins, studs, or metal banding can be used to secure the insulation. For flat surfaces, blankets can be impaled over insulation pins or studs. Metal mesh facings of adjacent blankets should be laced together with 16-ga. galvanized, annealed wire to keep joints tight. When insulation will be exposed to high air velocities, adequate protection must be provided to prevent erosion of insulation. On initial startup only, heat rise should not exceed 15°F (9°C) per minute to allow binder to dissipate.

Standard Sizes:

	Thickness*	Width	Lengths	Packaging
Metal Mesh 60	1"-4" (25mm-100mm)	24" (610mm)	48", 96", 120" (1.2m, 2.4m, 3.05m)	Palletized or Rolls
Metal Mesh 80	1"-4" (25mm-100mm)	24" (610mm)	48", 96", 120" (1.2m, 2.4m, 3.05m)	Palletized or Rolls

*Thicknesses are available in 1/2" (13mm) increments. Custom sizes are available upon request.

Technical Data:

		Thermal Conductivity Tested to ASTM C 177				
		Mean Temperature, k-Factor = BTU in/ft ² h °F (W/mK)				
	Actual Density	75°F (30°C)	200°F (93°C)	300°F (149°C)	500°F (260°C)	700°F (371°C)
Metal Mesh 60	6.0 pcf (96 kg/m ³)	0.24 (0.035)	0.30 (0.043)	0.38 (0.055)	0.56 (0.081)	NA
Metal Mesh 80	8.0 pcf (128 kg/m ³)	0.24 (0.035)	0.29 (0.042)	0.35 (0.050)	0.53 (0.076)	0.73 (0.105)

	Maximum Service temperature Tested to ASTM C 411	Tested to ASTM E 84	
		Flame Spread	Smoke Developed
Metal Mesh 60	1200°F (649°C)	0	0
Metal Mesh 80	1200°F (649°C)	0	0

Acoustical Performance:

		Coefficients at Frequencies Per ASTM C 423						
	Thickness	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	NRC
Metal Mesh 60	2" (50mm)	0.36	0.79	1.15	1.04	1.01	1.04	1.00
	4" (100mm)	1.15	1.17	1.18	1.03	1.06	1.08	1.10
Metal Mesh 80	2" (50mm)	0.35	0.84	1.08	1.04	0.96	0.93	1.00
	4" (100mm)	0.49	1.11	1.11	1.14	0.97	0.64	1.10

Standards Compliance:

ASTM E 136	Rated Non-combustible per NFPA Standard 220
HH-I-558B	Federal Spec – Form C, Class 10 & 11
MIL-I-24244	Meet applicable analysis for austenitic stainless steel
ASTM C 592	Type I & II
ASTM C 612	Metal Mesh 60 IVB
ASTM C 612	Metal Mesh 80 IVB
ASTM C 795	Complies
ASTM C 1104	Absorption less than 1% by volume
ASTM C 356	Linear shrinkage <2% @ 1200° F (650°C)

For Further Information:

For additional information about these or other Thermafiber products contact us at 1-888-834-2371 or visit our website www.thermafiber.com.

Notice:

THERMAFIBER, Inc. shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. THERMAFIBER liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing within thirty (30) days from date it was or reasonably should have been discovered.

Submittal Approvals:

Project	
Approval	Date

