



BULK

NAILS

Richmond, BC



San Bernardino, CA



Calgary, AB





Your Assurance of Quality, Value and Service

Tree Island Steel is the largest domestic nail producer in western North America. The Tree Island Steel facility in Richmond, British Columbia, is one of the most technologically advanced nail mills in the world, producing over 400 types, sizes and finishes of nails and staples for the construction and consumer markets.

Our prime focus at Tree Island Steel is to add value to all of our products. Advanced technology and efficient production help us ensure consistent quality while keeping costs down, and a diverse product line makes us a one-stop supplier for all your nail and wire needs. From a prepackaged nail retail program to traditional bulk packaging, our abundant inventory ensures that we have the product you need when you need it.

Customers who purchase Tree Island Steel nails can be assured of receiving products that are uniformly strong, straight and sharp. Your assurance of quality is that all our products are backed by a full replacement guarantee.

Tree Island Steel has a quality management system that complies with ISO 9001 standards.

You can count on us for quality.

You can count on us for value.

You can count on us for service.



ICC-ES ESR-1768





ENVIRONMENTAL SUSTAINABILITY

Tree Island Steel is committed to environmental sustainability.

Tree Island Steel leads the industry in environmental stewardship and is committed to embracing sustainability in all aspects of our operations.

From the products we manufacture to our durable, reusable packaging, we continually strive to ensure the most efficient use of our resources.



Our current achievements include:

- Many of our products are manufactured from recycled steel, and any scrap generated is recycled
- Tree Island packaged nails are supplied in plastic containers that are 100% reusable and recyclable
- Tree Island bulk and collated nails are packaged in cartons produced from recycled cardboard
- All waste materials generated from manufacturing or packaging are recycled or reused
- We participate in an empty wire carrier packaging retrieval program
- Water used in the production process is treated in a sophisticated wastewater treatment plant and exceeds all environmental requirements for discharge
- Tree Island Steel is fully committed to recycling paper documents and reducing the need for paper in offices and operations
- Our employees maximize the use of electronic communication in an effort to reduce paper usage

Our commitment to waste management includes:



- Recycling or reusing waste zinc
- Actively promoting recycling both internally and to customers and suppliers
- Sourcing and promoting products that minimize the environmental impact of both production and distribution
- Meeting or exceeding all environmental legislation in emissions
- Minimizing waste by evaluating operations and ensuring they are as efficient as possible
- Reducing power usage in plant operations

Our products are suitable for use in LEED structures, and Tree Island Steel's quality management system complies with ISO 9001 standards.



Genuine
Tree Island Steel
Hot-Dipped Galvanized
ZincGard® Nail



Competitor's
Galvanized Nail

IF IT DOESN'T SAY **HOT-DIPPED,** IT PROBABLY ISN'T!

Some companies cut corners when it comes to corrosion protection by manufacturing nails from hot-dipped galvanized wire, painting damaged heads and points with zinc paint, or even using a different coating altogether.

Tree Island Steel ZincGard® nails meet or exceed all ASTM A153 standards and are compliant to building code requirements in the US and Canada, ensuring you get the quality and product life you expect from a genuine hot-dipped galvanized nail.

In fact, we even go above when it comes to corrosion protection.

Tree Island Steel ZincGard® nails have one of the thickest and most uniform hot-dipped coatings in the market. Tests show that this can provide upwards of 20 more years of service life than a standard galvanized coating.

WHEN IT COMES TO CORROSION PROTECTION, WE CHECK ALL THE BOXES



MEETS ASTM
A153 SPECS



ACQ
APPROVED



UNIFORM
COATING



IMPACT AND
DAMAGE
RESISTANT



ZINC-COATED
AFTER
FORMING



GENUINE
HOT-DIPPED
COATING

THERE IS A DIFFERENCE!



TREE ISLAND STEEL ZINGGARD® NAILS ARE GENUINE HOT-DIPPED GALVANIZED NAILS, MADE TO THE HIGHEST STANDARDS AND DESIGNED TO LAST.

Beware of imposters! Some companies interchange “exterior galvanized” with hot-dipped galvanized nails. These are not hot-dipped galvanized nails and are not required to meet the same standards.



ZINGGARD® NAILS MEET ALL ASTM A153 SPECIFICATIONS INCLUDING ADHESION AND WEIGHT OF COAT REQUIREMENTS.

Nails cut from hot-dipped galvanized wire or coated in “zinc-like” finishes are not required to have the same coating thickness as genuine hot-dipped galvanized nails. A lighter coating means less service life. Beware of so-called “hot-dipped” nails.



HOT-DIPPED GALVANIZING PROVIDES A SACRIFICIAL BARRIER.

If there is damage to part of the nail, the adjacent zinc will protect the exposed steel until all of the surrounding zinc is consumed. If a nail manufactured from hot-dipped galvanized wire or a nail with a “zinc-like” coating is compromised, the exposed areas will begin to rust, leading to premature failure.




HOT-DIPPED GALVANIZING PRODUCES A METALLURGICAL BOND BETWEEN THE STEEL AND ZINC.

This reaction occurs at approximately 840°F and creates a 3,600 psi bond strength. Some companies paint the heads of nails manufactured from hot-dipped galvanized wire to conform to standards. The painted zinc adheres at only a few hundred psi bond strength and will not bond to unclean steel. Tests also show it has zero impact on the ability to protect from corrosion.



ZINGGARD® HOT-DIPPED GALVANIZED NAILS ARE RESISTANT TO IMPACT.

The zinc coating will not crack or chip off when being driven. Nails cut from galvanized wire leave the point and head damaged, exposing the bare steel to premature corrosion. When impacted by a hammer or nail gun, the head can be compromised.



HOT-DIPPED GALVANIZING CREATES A THICK, UNIFORM PROTECTIVE BARRIER, EVEN ON HARD TO COVER AREAS SUCH AS EDGES, CURVES AND POINTS.

A genuine hot-dipped galvanized nail should look just like this one here, not smooth and painted. Thick zinc coatings are missing on nails manufactured from hot-dipped galvanized wire, especially on hard to cover areas like the head and point.

TERMINOLOGY

FINISHES

Almost all nails in this brochure are shown with specifications as “bright” nails, which have a natural, uncoated steel finish. A variety of special finishes are also available.

Electro-Galvanized

An electroplating process which coats nails with a smooth, thin layer of zinc. Not recommended for exterior use. Available on any nail up to 12”, excluding finishing nails.

Hot-Dip Galvanized


A heavy coating is produced by immersion in molten zinc. The zinc provides dual protection by serving as both a barrier coating and a sacrificial coating. Tree Island Steel hot-dip galvanized nails exceed ASTM A153 Class D specifications. Hot-dip galvanized nails are recommended for use where high corrosion resistance is required such as outdoor exposure and for use with pressure treated wood (ACQ). Available on all nails over 1-¼” (3d), 15 gauge.

Vinyl Coated

A coating to ease nail driving and provide greater holding power. Ideal for pneumatic nail guns and automatic nail machines as the finish will not flake.

Phosphate Coated

A chemical etching process that provides temporary corrosion resistance and greater holding power. The phosphate coating is an excellent adhesive base for paints and drywall joint compound. Not recommended for exterior use. Available on nails up to 6”.

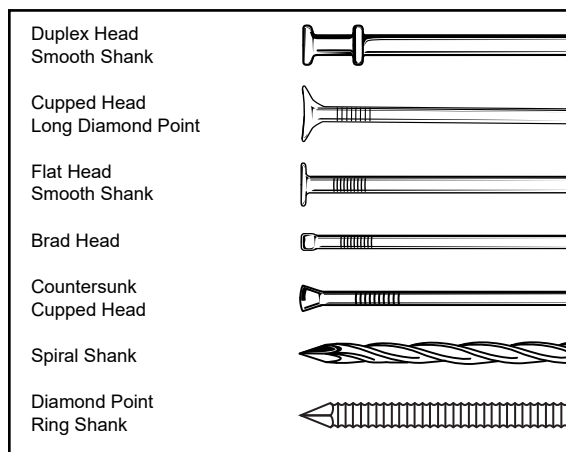

Spiral / Ring Shank

Recommended for shock loads or where extremely high holding power is required. Ring nails engage the wood fibres and are very difficult to remove.

Most nails are magnetically packed for easier handling. Packed in convenient, easy-to-handle strapped cartons for use on the job site or for display in retail stores.

Bend Yield Strengths

All Tree Island Steel nails used for framing and sheathing connections exceed the bend yield strength requirements of IBC Sec 2303.6.

| Nail Shank Size | | Bend Yield (psi) |
|-----------------|----------------|------------------|
| Wire Gauge | Decimal (in.) | |
| 7 to 2 | 0.178 to 0.263 | > 80,000 |
| 9-½ to 7 | 0.143 to 0.177 | > 90,000 |
| < 9-½ | < 0.142 | > 100,000 |

Codes and Specifications

Tree Island Steel nails meet or exceed the requirements of ASTM F1667, ASTM A153 and ASTM C514. Tree Island Steel nails are accepted as meeting the requirements of the International Building Code by ICC-ES Evaluation Report ESR-1768.

| Nail Shank Size Smooth | | Nail Head Diameter | | Nail Shank Size Spiral | |
|------------------------|---------------|--------------------|---------------|------------------------|---------------|
| Wire Gauge | Decimal (in.) | Head Size | Decimal (in.) | Wire Gauge | Decimal (in.) |
| 17-½ | 0.051 | ⅜" | 0.094 | 14 | 0.080 |
| 17 | 0.054 | ⅞" | 0.109 | 13-½ | 0.086 |
| 16 | 0.063 | ⅝" | 0.125 | 12-½ | 0.098 |
| 15-½ | 0.067 | ⅜" | 0.156 | 11-½ | 0.110 |
| 15 | 0.072 | ⅜" | 0.172 | 10-½ | 0.122 |
| 14-½ | 0.076 | ⅜" | 0.188 | 9-¾ | 0.132 |
| 14 | 0.080 | ⅜" | 0.203 | 9 | 0.148 |
| 13-½ | 0.086 | ⅜" | 0.219 | 8 | 0.160 |
| 13 | 0.092 | ⅜" | 0.234 | 7 | 0.176 |
| 12-½ | 0.099 | ⅜" | 0.250 | 5 | 0.212 |
| 12 | 0.106 | ⅜" | 0.266 | 3 | 0.252 |
| 11-½ | 0.113 | ⅜" | 0.281 | 2 | 0.276 |
| 11 | 0.121 | ⅜" | 0.297 | 1 | 0.300 |
| 10-½ | 0.128 | ⅜" | 0.313 | 0 | 0.324 |
| 10-¼ | 0.131 | ⅜" | 0.344 | | |
| 10 | 0.135 | ⅜" | 0.359 | | |
| 9-½ | 0.142 | ⅜" | 0.375 | | |
| 9 | 0.148 | ⅜" | 0.391 | | |
| 8-½ | 0.155 | ⅜" | 0.406 | | |
| 8 | 0.162 | ⅜" | 0.438 | | |
| 7 | 0.177 | ⅜" | 0.469 | | |
| 6-½ | 0.185 | ⅜" | 0.484 | | |
| 6 | 0.192 | ⅜" | 0.500 | | |
| 5-½ | 0.200 | ⅜" | 0.531 | | |
| 5 | 0.207 | ⅜" | 0.625 | | |
| 4 | 0.225 | ⅜" | 0.750 | | |
| 3 | 0.244 | | | | |
| 2 | 0.263 | | | | |

TABLE OF CONTENTS

GENERAL USE

| | |
|----------------------------|----|
| Common | 10 |
| Common Spike | 11 |
| Spiral | 12 |
| Spiral Spike | 13 |
| Spiral Finish | 13 |
| Box | 14 |
| Finishing | 16 |
| Ring Shank Common | 16 |
| Casing | 17 |
| Spiral Casing | 17 |
| Spiral Framing | 17 |
| Sinker | 18 |
| Spiral Sinker | 18 |
| Duplex (Scaffold) | 19 |
| Ring Shank Pole Barn | 19 |
| Joist Hanger | 20 |
| Drywall (Cupped) | 20 |
| Drywall (Ringed) | 20 |

SIDING

| | |
|-------------------------------|----|
| Siding | 21 |
| Spiral Siding | 21 |
| Oval Head Siding | 21 |
| Spiral Oval Head Siding | 21 |

ROOFING

| | |
|--|----|
| Standard Roofing | 22 |
| Tile | 23 |
| Neoprene Roofing (Ring Shank) | 23 |
| Plastic Cap Roofing (Ring Shank) | 23 |
| Shake | 23 |
| Shingle | 24 |
| Non-Split Shingle | 24 |
| Eavestrough / Gutter | 24 |
| Eavestrough / Gutter (Spiral) | 24 |

FLOORING & DECKING

| | |
|------------------------------------|----|
| Ring Shank Underlay Flooring | 25 |
| Fluted Flooring | 25 |
| Spiral Decking | 25 |
| Ring Shank Decking | 26 |

SPECIALTY USE

| | |
|-------------------------------|----|
| Fluted Masonry | 26 |
| Furring Nail | 26 |
| Fence Staples | 27 |
| Poultry Netting Staples | 27 |

GENERAL USE



COMMON

- Flat Head
- Diamond Point
- Round Smooth Shank

For general construction, carpentry and wood framing.

| COMMON - BRIGHT | | | | | | | |
|-----------------------------|------|---------------------------------|-------|----------------------------------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1AA10 | 2d | 1" | 15 | 1 ¹ / ₆₄ " | 50 lb | 796 | 95832000069 |
| 1AA12 | 3d | 1 ¹ / ₄ " | 14 | 1 ³ / ₆₄ " | 50 lb | 474 | 95832000076 |
| 1AA14 | 4d | 1 ¹ / ₂ " | 12.5 | 1/4" | 50 lb | 278 | 95832000083 |
| 1AA16 | 5d | 1 ³ / ₄ " | 12.5 | 1/4" | 50 lb | 241 | 95832000090 |
| 1AA20 | 6d | 2" | 11.5 | 1 ⁷ / ₆₄ " | 50 lb | 164 | 95832000106 |
| 1AA22 | 7d | 2 ¹ / ₄ " | 11.5 | 1 ⁷ / ₆₄ " | 50 lb | 146 | 95832000113 |
| 1AA24 | 8d | 2 ¹ / ₂ " | 10.25 | 9/32" | 50 lb | 99 | 95832000120 |
| 1AA30 | 10d | 3" | 9 | 5/16" | 50 lb | 66 | 95832000137 |
| 1AA32 | 12d | 3 ¹ / ₄ " | 9 | 5/16" | 50 lb | 61 | 95832000144 |
| 1AA34 | 16d | 3 ¹ / ₂ " | 8 | 1 ¹ / ₃₂ " | 50 lb | 47 | 95832000151 |
| 1AA40 | 20d | 4" | 6 | 1 ³ / ₃₂ " | 50 lb | 29 | 95832000168 |
| 1AA44 | 30d | 4 ¹ / ₂ " | 5 | 7/16" | 50 lb | 22 | 95832000175 |
| 1AA50 | 40d | 5" | 4 | 1 ⁵ / ₃₂ " | 50 lb | 16 | 95832000182 |
| 1AA54 | 50d | 5 ¹ / ₂ " | 3 | 1/2" | 50 lb | 13 | 95832000199 |
| 1AA60-20 | 60d | 6" | 2 | 1 ⁷ / ₃₂ " | 20 lb | 10 | 95832305744 |
| 1AA60 | 60d | 6" | 2 | 1 ⁷ / ₃₂ " | 50 lb | 10 | 95832000205 |
| COMMON - HOT DIP GALVANIZED | | | | | | | |
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1CA10 | 2d | 1" | 15 | 1 ¹ / ₆₄ " | 50 lb | 692 | 95832001349 |
| 1CA12 | 3d | 1 ¹ / ₄ " | 14 | 1 ³ / ₆₄ " | 50 lb | 420 | 95832001356 |
| 1CA14 | 4d | 1 ¹ / ₂ " | 12.5 | 1/4" | 50 lb | 251 | 95832001363 |
| 1CA16 | 5d | 1 ³ / ₄ " | 12.5 | 1/4" | 50 lb | 218 | 95832001370 |
| 1CA20 | 6d | 2" | 11.5 | 1 ⁷ / ₆₄ " | 50 lb | 150 | 95832001387 |
| 1CA22 | 7d | 2 ¹ / ₄ " | 11.5 | 1 ⁷ / ₆₄ " | 50 lb | 134 | 95832001394 |
| 1CA24 | 8d | 2 ¹ / ₂ " | 10.25 | 9/32" | 50 lb | 92 | 95832001400 |
| 1CA30 | 10d | 3" | 9 | 5/16" | 50 lb | 61 | 95832001417 |
| 1CA32 | 12d | 3 ¹ / ₄ " | 9 | 5/16" | 50 lb | 57 | 95832001424 |
| 1CA34 | 16d | 3 ¹ / ₂ " | 8 | 1 ¹ / ₃₂ " | 50 lb | 44 | 95832001431 |
| 1CA40 | 20d | 4" | 6 | 1 ³ / ₃₂ " | 50 lb | 28 | 95832001448 |
| 1CA44 | 30d | 4 ¹ / ₂ " | 5 | 7/16" | 50 lb | 21 | 95832001455 |
| 1CA50 | 40d | 5" | 4 | 1 ⁵ / ₃₂ " | 50 lb | 15 | 95832001462 |
| 1CA54 | 50d | 5 ¹ / ₂ " | 3 | 1/2" | 50 lb | 12 | 95832001479 |
| 1CA60-20 | 60d | 6" | 2 | 1 ⁷ / ₃₂ " | 20 lb | 9 | 95832305881 |
| 1CA60 | 60d | 6" | 2 | 1 ⁷ / ₃₂ " | 50 lb | 9 | 95832001486 |

GENERAL USE




COMMON

- Flat Head
- Diamond Point
- Round Smooth Shank

For general construction, carpentry and wood framing.

| COMMON - VINYL COATED | | | | | | | |
|-----------------------|------|--------|-------|------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1LA24 | 8d | 2½" | 10.25 | ⅝" | 50 lb | 101 | 95832004111 |
| 1LA30 | 10d | 3" | 9 | ⅝" | 50 lb | 66 | 95832004128 |
| 1LA34 | 16d | 3½" | 8 | 1⅛" | 50 lb | 47 | 95832004135 |
| 1LA40 | 20d | 4" | 6 | 1⅜" | 50 lb | 17 | 95832004142 |



COMMON SPIKE

- Flat Countersunk Head
- Diamond Point
- Round Smooth Shank

For heavy timber construction such as post and beam, landscape ties and bridge decking.

| COMMON SPIKE - BRIGHT | | | | | | | |
|-----------------------|------|--------|-------|------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1AA70 | | 7" | ⅝" | ⅝" | 50 lb | 6 | 95832000212 |
| 1AA80-20 | | 8" | ⅝" | ⅝" | 20 lb | 6 | 95832305768 |
| 1AA80 | | 8" | ⅝" | ⅝" | 50 lb | 6 | 95832000229 |
| 1AAE0 | | 10" | ⅝" | ⅝" | 50 lb | 4 | 95832008034 |
| 1AAF0 | | 12" | ⅝" | ⅝" | 50 lb | 4 | 95832008041 |
| 1AAG0 | | 7" | ⅜" | ¾" | 50 lb | 4 | 95832005927 |
| 1AAD0 | | 8" | ⅜" | ¾" | 50 lb | 4 | 95832000038 |
| 1AAA0-20 | | 10" | ⅜" | ¾" | 20 lb | 3 | 95832305782 |
| 1AAA0 | | 10" | ⅜" | ¾" | 50 lb | 3 | 95832008003 |
| 1AAC0-20 | | 12" | ⅜" | 1⅞" | 20 lb | 3 | 95832305867 |
| 1AAC0 | | 12" | ⅜" | ¾" | 50 lb | 3 | 95832008010 |
| 1AAB0 | | 14" | ⅜" | ¾" | 50 lb | 2 | 95832008027 |

| COMMON SPIKE - HOT DIP GALVANIZED | | | | | | | |
|-----------------------------------|------|--------|-------|------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1CA70 | | 7" | ⅝" | ⅝" | 50 lb | 6 | 95832001493 |
| 1CA80-20 | | 8" | ⅝" | ⅝" | 20 lb | 5 | 95832305904 |
| 1CA80 | | 8" | ⅝" | ⅝" | 50 lb | 5 | 95832001509 |
| 1CAD0 | | 8" | ⅜" | ¾" | 50 lb | 4 | 95832001332 |
| 1CAA0-20 | | 10" | ⅜" | ¾" | 20 lb | 3 | 95832305928 |
| 1CAA0 | | 10" | ⅜" | ¾" | 50 lb | 3 | 95832008072 |
| 1CAC0-20 | | 12" | ⅜" | 1⅞" | 20 lb | 3 | 95832305942 |
| 1CAC0 | | 12" | ⅜" | ¾" | 50 lb | 2 | 95832008089 |
| 1CAB0 | | 14" | ⅜" | ¾" | 50 lb | 2 | 95832008096 |

GENERAL USE



SPIRAL

- Flat Head
- Diamond Point
- Spiral Shank

For general construction use where ease of driving and greater holding power are required. Effective against shock loads and vibrations, holding power increases from 50% to 200%.

| SPIRAL - BRIGHT | | | | | | | |
|-----------------------------|------|--------|-------|--------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1EA12 | 3d | 1¼" | 14 | ⅜" | 50 lb | 608 | 95832005552 |
| 1EA14 | 4d | 1½" | 13.5 | 7/32" | 50 lb | 439 | 95832002988 |
| 1EA20 | 6d | 2" | 12.5 | 15/64" | 50 lb | 252 | 95832003008 |
| 1EA22 | 7d | 2¼" | 11.5 | ¼" | 50 lb | 188 | 95832003015 |
| 1EA24 | 8d | 2½" | 10.5 | 17/64" | 50 lb | 126 | 95832003022 |
| 1EA30 | 10d | 3" | 9.75 | 9/32" | 50 lb | 96 | 95832003039 |
| 1EA32 | 12d | 3¼" | 9.75 | 9/32" | 50 lb | 89 | 95832003046 |
| 1EA34 | 16d | 3½" | 8 | 1½/32" | 50 lb | 57 | 95832003053 |
| 1EA40 | 20d | 4" | 7 | 23/64" | 50 lb | 41 | 95832003060 |
| 1EA50 | 40d | 5" | 5 | ⅜" | 50 lb | 24 | 95832003077 |
| 1EA60-20 | 60d | 6" | 3 | 25/64" | 20 lb | 15 | 95832305584 |
| 1EA60 | 60d | 6" | 3 | 25/64" | 50 lb | 15 | 95832003084 |
| SPIRAL - HOT DIP GALVANIZED | | | | | | | |
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1FA12 | 3d | 1¼" | 14 | ⅜" | 50 lb | 531 | 95832000960 |
| 1FA14 | 4d | 1½" | 13.5 | 7/32" | 50 lb | 386 | 95832003183 |
| 1FA16 | 5d | 1¾" | 12.5 | 15/64" | 50 lb | 253 | 95832003190 |
| 1FA20 | 6d | 2" | 12.5 | 15/64" | 50 lb | 229 | 95832003206 |
| 1FA22 | 7d | 2¼" | 11.5 | ¼" | 50 lb | 170 | 95832003220 |
| 1FA24 | 8d | 2½" | 10.5 | 17/64" | 50 lb | 116 | 95832003244 |
| 1FA30 | 10d | 3" | 9.75 | 9/32" | 50 lb | 89 | 95832003251 |
| 1FA32 | 12d | 3¼" | 9.75 | 9/32" | 50 lb | 82 | 95832003268 |
| 1FA34 | 16d | 3½" | 8 | 9/32" | 50 lb | 53 | 95832003275 |
| 1FA40 | 20d | 4" | 7 | 1½/32" | 50 lb | 39 | 95832003282 |
| 1FA50 | 40d | 5" | 5 | 23/64" | 50 lb | 22 | 95832003299 |
| 1FA60-20 | 60d | 6" | 3 | ⅜" | 20 lb | 14 | 95832305669 |
| 1FA60 | 60d | 6" | 3 | ⅜" | 50 lb | 14 | 95832003305 |

GENERAL USE



SPIRAL SPIKE

- Flat Head
- Diamond Point
- Spiral Shank

For heavy timber construction such as log homes and wood retaining walls where additional holding power is required. Thinner shank drives easier and helps reduce wood splitting.

| SPIRAL SPIKE - BRIGHT | | | | | | | |
|-----------------------------------|------|--------|-------|--------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1EA70 | | 7" | 2 | ½" | 50 lb | 10 | 95832003091 |
| 1EA80-20 | | 8" | 1 | ½" | 20 lb | 7 | 95832305607 |
| 1EA80 | | 8" | 1 | ½" | 50 lb | 7 | 95832003107 |
| 1EAA0-20 | | 10" | 0 | 35/64" | 20 lb | 5 | 95832305621 |
| 1EAA0 | | 10" | 0 | 35/64" | 50 lb | 5 | 95832008058 |
| 1EAC0-20 | | 12" | 0 | 9/16" | 20 lb | 4 | 95832305645 |
| 1EAC0 | | 12" | 0 | 9/16" | 50 lb | 4 | 95832008065 |
| SPIRAL SPIKE - HOT DIP GALVANIZED | | | | | | | |
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1FA70 | | 7" | 2 | ½" | 50 lb | 9 | 95832003312 |
| 1FA80-20 | | 8" | 1 | ½" | 20 lb | 7 | 95832305683 |
| 1FA80 | | 8" | 1 | ½" | 50 lb | 7 | 95832003329 |
| 1FAA0-20 | | 10" | 0 | 35/64" | 20 lb | 5 | 95832305706 |
| 1FAA0 | | 10" | 0 | 35/64" | 50 lb | 5 | 95832008102 |
| 1FAC0-20 | | 12" | 0 | 9/16" | 20 lb | 4 | 95832305720 |
| 1FAC0 | | 12" | 0 | 9/16" | 50 lb | 4 | 95832008119 |



SPIRAL FINISH

- Brad Head
- Diamond Point
- Spiral Shank

Used for trim work and finishing where maximum strength is needed and nail concealment is desired.

| SPIRAL FINISH - BRIGHT | | | | | | | |
|------------------------------------|------|--------|-------|-------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1EC12 | 3d | 1¼" | 15 | ⅛" | 50 lb | 501 | 95832006061 |
| 1EC14 | 4d | 1½" | 14 | ⅛" | 50 lb | 425 | 95832001127 |
| 1EC16 | 4d | 1¾" | 13.5 | ⅛" | 50 lb | 369 | 95832006078 |
| 1EC20 | 6d | 2" | 12.5 | ⅛" | 50 lb | 255 | 95832003114 |
| 1EC24 | 8d | 2½" | 12.5 | ⅛" | 50 lb | 207 | 95832001196 |
| 1EC30 | 10d | 3" | 11.5 | 5/32" | 50 lb | 141 | 95832003121 |
| SPIRAL FINISH - HOT DIP GALVANIZED | | | | | | | |
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1FC14 | 4d | 1½" | 14 | ⅛" | 50 lb | 380 | 95832004869 |
| 1FC20 | 6d | 2" | 12.5 | ⅛" | 50 lb | 230 | 95832004876 |
| 1FC24 | 8d | 2½" | 12.5 | ⅛" | 50 lb | 186 | 95832004883 |
| 1FC30 | 10d | 3" | 11.5 | 5/32" | 50 lb | 128 | 95832000953 |
| 1FC34 | 16d | 3½" | 10.5 | 5/32" | 50 lb | 84 | 95832001202 |

GENERAL USE



BOX

- Flat Head
- Diamond Point
- Round Smooth Shank

For light general interior and exterior construction. Lighter than common nails, they help reduce splitting in soft woods.

| BOX - BRIGHT | | | | | | | |
|--------------------------|------|--------|-------|--------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1AB12 | 3d | 1¼" | 14.5 | 7/32" | 50 lb | 629 | 95832000236 |
| 1AB14 | 4d | 1½" | 14 | 7/32" | 50 lb | 406 | 95832000243 |
| 1AB16 | 5d | 1¾" | 14 | 7/32" | 50 lb | 351 | 95832000250 |
| 1AB20 | 6d | 2" | 12.5 | 17/64" | 50 lb | 215 | 95832000267 |
| 1AB22 | 7d | 2¼" | 12.5 | 17/64" | 50 lb | 192 | 95832000274 |
| 1AB24 | 8d | 2½" | 11.5 | 19/64" | 50 lb | 134 | 95832000281 |
| 1AB30 | 10d | 3" | 10.5 | 5/16" | 50 lb | 85 | 95832000298 |
| 1AB32 | 12d | 3¼" | 10.5 | 5/16" | 50 lb | 79 | 95832000304 |
| 1AB34 | 16d | 3½" | 10 | 11/32" | 50 lb | 68 | 95832000311 |
| 1AB40 | 20d | 4" | 9 | 3/8" | 50 lb | 49 | 95832000328 |
| BOX - HOT DIP GALVANIZED | | | | | | | |
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1CB12 | 3d | 1¼" | 14.5 | 7/32" | 50 lb | 545 | 95832001523 |
| 1CB14 | 4d | 1½" | 14 | 7/32" | 50 lb | 359 | 95832001530 |
| 1CB16 | 5d | 1¾" | 14 | 7/32" | 50 lb | 311 | 95832001547 |
| 1CB20 | 6d | 2" | 12.5 | 17/64" | 50 lb | 194 | 95832001554 |
| 1CB22 | 7d | 2¼" | 12.5 | 17/64" | 50 lb | 173 | 95832001561 |
| 1CB24 | 8d | 2½" | 11.5 | 19/64" | 50 lb | 123 | 95832001578 |
| 1CB30 | 10d | 3" | 10.5 | 5/16" | 50 lb | 79 | 95832001585 |
| 1CB32 | 12d | 3¼" | 10.5 | 5/16" | 50 lb | 79 | 95832001592 |
| 1CB34 | 16d | 3½" | 10 | 11/32" | 50 lb | 63 | 95832001608 |
| 1CB40 | 20d | 4" | 9 | 3/8" | 50 lb | 46 | 95832001615 |
| 1CB44 | 30d | 4½" | 9 | 3/8" | 50 lb | 41 | 95832005521 |
| 1CB50 | 40d | 5" | 8 | 13/32" | 50 lb | 31 | 95832001622 |

GENERAL USE



BOX

- Flat Head
- Diamond Point
- Round Smooth Shank

For light general interior and exterior construction. Lighter than common nails, they help reduce splitting in soft woods.

| BOX - PHOSPHATE COATED | | | | | | | |
|--------------------------|------|--------|-------|--------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1BB12 | 3d | 1¼" | 14.5 | 7/32" | 50 lb | 629 | 95832001004 |
| 1BB14 | 4d | 1½" | 14 | 7/32" | 50 lb | 406 | 95832001011 |
| 1BB20 | 6d | 2" | 12.5 | 17/64" | 50 lb | 215 | 95832001035 |
| 1BB22 | 7d | 2¼" | 12.5 | 17/64" | 50 lb | 192 | 95832001042 |
| 1BB24 | 8d | 2½" | 11.5 | 19/64" | 50 lb | 134 | 95832001059 |
| 1BB30 | 10d | 3" | 10.5 | 5/16" | 50 lb | 85 | 95832001066 |
| 1BB32 | 12d | 3¼" | 10.5 | 5/16" | 50 lb | 79 | 95832001073 |
| 1BB34 | 16d | 3½" | 10 | 11/32" | 50 lb | 68 | 95832001080 |
| 1BB40 | 20d | 4" | 9 | 3/8" | 50 lb | 49 | 95832001097 |
| 1BB50 | 40d | 5" | 8 | 13/32" | 50 lb | 33 | 95832001110 |
| BOX - VINYL COATED | | | | | | | |
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1LB20 | 6d | 2" | 12.5 | 17/64" | 50 lb | 225 | 95832004197 |
| 1LB24 | 8d | 2½" | 11.5 | 19/64" | 50 lb | 200 | 95832004210 |
| 1LB30 | 10d | 3" | 10.5 | 5/16" | 50 lb | 90 | 95832004227 |
| 1LB32 | 12d | 3¼" | 10.5 | 5/16" | 50 lb | 83 | 95832004234 |
| 1LB34 | 16d | 3½" | 10 | 11/32" | 50 lb | 69 | 95832004241 |
| 1LB40 | 20d | 4" | 9 | 3/8" | 50 lb | 50 | 95832004258 |
| BOX - ELECTRO GALVANIZED | | | | | | | |
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1DB14 | 4d | 1½" | 14 | 7/32" | 50 lb | 406 | 95832002247 |
| 1DB20 | 6d | 2" | 12.5 | 17/64" | 50 lb | 215 | 95832002261 |
| 1DB24 | 8d | 2½" | 11.5 | 19/64" | 50 lb | 134 | 95832002285 |
| 1DB30 | 10d | 3" | 10.5 | 5/16" | 50 lb | 85 | 95832002292 |
| 1DB34 | 16d | 3½" | 10 | 11/32" | 50 lb | 68 | 95832002315 |

GENERAL USE



FINISHING

- Brad Head
- Diamond Point
- Round Smooth Shank

Used mainly for light fastening of interior trim work, finish carpentry and in cabinetry where nail concealment is desired.

| FINISHING - BRIGHT | | | | | | | |
|--------------------|------|--------|-------|--------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1AC06 | 1d | ¾" | 17.5 | 5/64" | 50 lb | 2242 | 95832000342 |
| 1AC10 | 2d | 1" | 17 | 5/64" | 50 lb | 1503 | 95832000359 |
| 1AC12 | 3d | 1¼" | 15.5 | 7/64" | 50 lb | 781 | 95832000366 |
| 1AC14 | 4d | 1½" | 15 | 7/64" | 50 lb | 573 | 95832000373 |
| 1AC16 | 5d | 1¾" | 15 | 7/64" | 50 lb | 492 | 95832000380 |
| 1AC20 | 6d | 2" | 13 | 1/8" | 50 lb | 269 | 95832000397 |
| 1AC22 | 7d | 2¼" | 13 | 9/64" | 50 lb | 239 | 95832000403 |
| 1AC24 | 8d | 2½" | 12.5 | 9/64" | 50 lb | 184 | 95832000410 |
| 1AC30 | 10d | 3" | 11.5 | 5/32" | 50 lb | 119 | 95832000427 |
| 1AC32 | 12d | 3¼" | 11.5 | 5/32" | 50 lb | 109 | 95832000434 |
| 1AC34 | 16d | 3½" | 11 | 11/64" | 50 lb | 90 | 95832000441 |
| 1AC40 | 20d | 4" | 10 | 3/16" | 50 lb | 62 | 95832000458 |

| FINISHING - HOT DIP GALVANIZED | | | | | | | |
|--------------------------------|------|--------|-------|--------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1CC10 | 2d | 1" | 17 | 5/64" | 50 lb | 1264 | 95832001639 |
| 1CC12 | 3d | 1¼" | 15.5 | 7/64" | 50 lb | 678 | 95832001646 |
| 1CC14 | 4d | 1½" | 15 | 7/64" | 50 lb | 502 | 95832001653 |
| 1CC16 | 5d | 1¾" | 15 | 7/64" | 50 lb | 431 | 95832001660 |
| 1CC20 | 6d | 2" | 13 | 1/8" | 50 lb | 242 | 95832001677 |
| 1CC24 | 8d | 2½" | 12.5 | 9/64" | 50 lb | 167 | 95832001691 |
| 1CC30 | 10d | 3" | 11.5 | 5/32" | 50 lb | 109 | 95832001707 |
| 1CC32 | 12d | 3¼" | 11.5 | 5/32" | 50 lb | 100 | 95832001714 |
| 1CC34 | 16d | 3½" | 11 | 11/64" | 50 lb | 83 | 95832001721 |
| 1CC40 | 20d | 4" | 10 | 3/16" | 50 lb | 58 | 95832001738 |



RING SHANK COMMON

- Flat Head
- Diamond Point
- Round Ringed Shank

For use in permanent applications where superior holding power and enduring strength are essential. Commonly used for flooring, sheathing and decking.

| RING SHANK COMMON - BRIGHT | | | | | | | |
|----------------------------|------|--------|-------|--------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1GA20 | 6d | 2" | 11.5 | ¼" | 50 lb | 164 | 95832003497 |
| 1GA22 | 7d | 2¼" | 11.5 | ¼" | 50 lb | 147 | 95832003503 |
| 1GA24 | 8d | 2½" | 10.25 | 17/64" | 50 lb | 99 | 95832003510 |
| 1GA30 | 10d | 3" | 9 | 5/16" | 50 lb | 66 | 95832003527 |
| 1GA34 | 16d | 3½" | 8 | 11/34" | 50 lb | 47 | 95832003534 |
| 1GA40 | 20d | 4" | 6 | 13/32" | 50 lb | 29 | 95832003541 |

| RING SHANK COMMON - ELECTRO GALVANIZED | | | | | | | |
|--|------|--------|-------|------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1JA22 | 7d | 2¼" | 11.5 | ¼" | 50 lb | 134 | 95832004944 |

GENERAL USE



CASING

- Countersunk Cupped Head
- Diamond Point
- Round Smooth Shank

Used for trim work where additional strength is needed and nail concealment is desired.

| CASING - HOT DIP GALVANIZED | | | | | | | |
|-----------------------------|------|--------|-------|--------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1CD12 | 3d | 1¼" | 14.25 | 7/64" | 50 lb | 605 | 95832001752 |
| 1CD14 | 4d | 1½" | 14 | 1/8" | 50 lb | 385 | 95832001769 |
| 1CD16 | 5d | 1¾" | 14 | 1/8" | 50 lb | 330 | 95832001776 |
| 1CD20 | 6d | 2" | 12.5 | 9/64" | 50 lb | 206 | 95832001783 |
| 1CD22 | 7d | 2¼" | 12.5 | 9/64" | 50 lb | 183 | 95832001790 |
| 1CD24 | 8d | 2½" | 11.5 | 5/32" | 50 lb | 130 | 95832001806 |
| 1CD30 | 10d | 3" | 10.5 | 11/64" | 50 lb | 82 | 95832001813 |
| 1CD32 | 12d | 3¼" | 10.5 | 11/64" | 50 lb | 76 | 95832001820 |
| 1CD34 | 16d | 3½" | 10 | 3/16" | 50 lb | 66 | 95832001837 |
| 1CD40 | 20d | 4" | 9 | 3/16" | 50 lb | 49 | 95832001844 |



SPIRAL CASING

- Countersunk Cupped Head
- Diamond Point
- Spiral Shank

Used for trim work where additional strength is needed and nail concealment is desired.

| SPIRAL CASING - HOT DIP GALVANIZED | | | | | | | |
|------------------------------------|------|--------|-------|--------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1FD32 | 12d | 3¼" | 9.75 | 13/64" | 50 lb | 70 | 95832003336 |



SPIRAL FRAMING

- Flat Head
- Diamond Point
- Spiral Shank

For general construction and framing where greater resistance against shock loads and vibrations is required.

| SPIRAL FRAMING - PHOSPHATE COATED | | | | | | | |
|-----------------------------------|------|--------|-------|--------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1K214 | | 2¼" | 11.5 | ¼" | 50 lb | 142 | 95832004081 |
| 1K220 | | 3¼" | 9.75 | 17/64" | 50 lb | 89 | 95832004098 |
| 1K222 | | 3½" | 8 | 17/64" | 50 lb | 89 | 95832004647 |

GENERAL USE



SINKER

- Flat Countersunk Checkered Head
- Diamond Point
- Round Smooth Shank

Used for wood framing and general construction.

| SINKER - PHOSPHATE COATED | | | | | | | |
|-----------------------------|------|--------|-------|---------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1BR32 | 16d | 3 1/4" | 9 | 1 1/32" | 50 lb | 57 | 95832009420 |
| SINKER - VINYL COATED | | | | | | | |
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1QR13 | 4d | 1 3/8" | 14 | 1 3/64" | 50 lb | 527 | 95832006610 |
| 1QR17 | 6d | 1 7/8" | 13 | 1 5/64" | 50 lb | 293 | 95832004562 |
| 1QR23 | 8d | 2 3/8" | 11.5 | 1 7/64" | 50 lb | 153 | 95832004579 |
| 1QR27 | 10d | 2 7/8" | 11 | 9/32" | 50 lb | 111 | 95832004586 |
| 1QR31 | 12d | 3 1/8" | 10 | 5/16" | 50 lb | 81 | 95832004593 |
| 1QR32 | 16d | 3 1/4" | 9 | 1 1/32" | 50 lb | 64 | 95832004609 |
| 1QR36 | 20d | 3 3/4" | 7 | 3/8" | 50 lb | 40 | 95832005835 |
| SINKER - HOT DIP GALVANIZED | | | | | | | |
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1CR32 | 16d | 3 1/4" | 9 | 1 1/32" | 50 lb | 60 | 95832002179 |



SPIRAL SINKER

- Flat Countersunk Checkered Head
- Diamond Point
- Spiral Shank

For general interior and exterior construction, carpentry and wood framing.

| SPIRAL SINKER - HOT DIP GALVANIZED | | | | | | | |
|------------------------------------|------|--------|-------|---------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1FR32 | 16d | 3 1/4" | 9 | 1 1/32" | 50 lb | 62 | 95832003466 |

GENERAL USE



DUPLEX (SCAFFOLD)

- Double Head
- Diamond Point
- Round Smooth Shank

For temporary construction where nail removal is required such as concrete form work, scaffolds and bracing. Also used for stringing temporary wiring.

| DUPLEX - BRIGHT | | | | | | | |
|-----------------|------|--------|-------|--------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1AJ16 | 6d | 1¾" | 11.5 | 15/64" | 50 lb | 152 | 95832000625 |
| 1AJ22 | 8d | 2¼" | 10.25 | ¼" | 50 lb | 89 | 95832000632 |
| 1AJ24 | 9d | 2½" | 10.25 | ¼" | 50 lb | 81 | 95832000649 |
| 1AJ26 | 10d | 2¾" | 9 | 19/64" | 50 lb | 62 | 95832000656 |
| 1AJ30 | 16d | 3" | 8 | 5/16" | 50 lb | 48 | 95832000663 |
| 1AJ32 | 18d | 3¼" | 7 | 1½/32" | 50 lb | 38 | 95832000670 |
| 1AJ34 | 20d | 3½" | 6 | ¾" | 50 lb | 31 | 95832000687 |
| 1AJ40 | 30d | 4" | 5 | ¾" | 50 lb | 23 | 95832000694 |



RING SHANK POLE BARN

- Flat Head
- Diamond Point
- Round Ringed Shank

For load-bearing wooden structures where superior holding power is necessary. Threads lock to wood fibres to add structural strength.

| POLE BARN - TEMPER HARDENED | | | | | | | |
|-----------------------------|------|--------|-------|--------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 7P304 | 20d | 4" | 7 | ¾" | 50 lb | 35 | 95832007365 |
| 7P305 | 40d | 5" | 7 | ¾" | 50 lb | 28 | 95832007372 |
| 7P306 | 60d | 6" | 5 | 15/32" | 50 lb | 17 | 95832007389 |

GENERAL USE



JOIST HANGER

- Flat Head
- Diamond Point
- Round Shank

A heavy-gauge nail suitable for securely supporting metal connectors for wood construction.

| JOIST - BRIGHT | | | | | | | |
|----------------------------|------|--------|-------|--------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1A152 | | 1¼" | 11 | 9/32" | 50 lb | 222 | 95832000779 |
| 1A155 | N8 | 1½" | 10.25 | 9/32" | 50 lb | 251 | 95832005958 |
| 1A154 | N10 | 1½" | 9 | 5/16" | 50 lb | 123 | 95832000786 |
| 1A164 | N16 | 2½" | 8 | 1½/32" | 50 lb | 67 | 95832000809 |
| JOIST - HOT DIP GALVANIZED | | | | | | | |
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1C159 | | 1¼" | 11 | 9/32" | 50 lb | 222 | 95832006481 |
| 1C162 | | 1¼" | 9 | 5/16" | 50 lb | 150 | 95832009406 |
| 1C154 | N10 | 1½" | 9 | 5/16" | 50 lb | 120 | 95832005064 |
| 1C155 | N8 | 1½" | 10.25 | 9/32" | 50 lb | 141 | 95832004968 |
| 1C164 | N16 | 2½" | 8 | 1½/32" | 50 lb | 63 | 95832006603 |
| JOIST - ELECTRO GALVANIZED | | | | | | | |
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1D152 | | 1¼" | 11 | 9/32" | 50 lb | 222 | 95832002902 |
| 1D154 | N10 | 1½" | 9 | 5/16" | 50 lb | 129 | 95832002919 |




CUPPED DRYWALL

- Cupped Head
- Long Diamond Point
- Round Smooth Shank

For attaching drywall to wood framing. For ½" drywall, use 1¾" nail. For 5/8" drywall, use 1½" nail.

| CUPPED DRYWALL - PHOSPHATE COATED | | | | | | | |
|-----------------------------------|------|--------|-------|-------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1BL12 | | 1¼" | 12.5 | 5/16" | 50 lb | 351 | 95832006016 |
| 1BL13 | | 1¾" | 12.5 | 5/16" | 50 lb | 372 | 95832001134 |
| 1BL14 | | 1½" | 12.5 | 5/16" | 50 lb | 342 | 95832001141 |
| 1BL15 | | 1¾" | 12.5 | 5/16" | 50 lb | 317 | 95832001158 |
| 1BL17 | | 1¾" | 12.5 | 5/16" | 50 lb | 276 | 95832001165 |
| 1BL23 | | 2¾" | 11.5 | 3/8" | 50 lb | 142 | 95832001189 |



RINGED DRYWALL

- Flat Head
- Diamond Point
- Ringed Shank

For attaching drywall to wood framing. For ½" drywall, use 1¾" nail. For 5/8" drywall, use 1½" nail.

| RINGED DRYWALL - ELECTRO GALVANIZED | | | | | | | |
|-------------------------------------|------|--------|-------|--------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1JQ12 | | 1¼" | 12.5 | 5/16" | 50 lb | 344 | 95832003985 |
| 1JQ13 | | 1¾" | 12.5 | 5/16" | 50 lb | 315 | 95832003992 |
| 1JQ14 | | 1½" | 12.5 | 5/16" | 50 lb | 290 | 95832004005 |
| 1JQ15 | | 1¾" | 12.5 | 5/16" | 50 lb | 269 | 95832004012 |
| 1JQ17 | | 1¾" | 12.5 | 5/16" | 50 lb | 235 | 95832004036 |
| 1JQ20 | | 2" | 12.5 | 19/64" | 50 lb | 221 | 95832004043 |

SIDING



SIDING

- Flat Head
- Blunt Point
- Round Smooth Shank

Used for application of cedar siding and clapboard. Small diameter and blunt point prevent wood from splitting.

| SIDING - HOT DIP GALVANIZED | | | | | | | |
|-----------------------------|------|--------|-------|--------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1CI20 | 6d | 2" | 12.5 | 3/16" | 50 lb | 236 | 95832002070 |
| 1CI22 | 7d | 2 1/4" | 12.5 | 3/16" | 50 lb | 210 | 95832002087 |
| 1CI24 | 8d | 2 1/2" | 12.5 | 7/32" | 50 lb | 145 | 95832002094 |
| 1CI30 | 10d | 3" | 10.5 | 15/64" | 50 lb | 103 | 95832002100 |



SPIRAL SIDING

- Flat Checkered Head
- Blunt Point
- Spiral Shank

Used for application of cedar siding where greater holding strength is required.

| SPIRAL SIDING - HOT DIP GALVANIZED | | | | | | | |
|------------------------------------|------|--------|-------|--------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1FG20 | 6d | 2" | 12.5 | 3/16" | 50 lb | 236 | 95832003343 |
| 1FG22 | 7d | 2 1/4" | 12.5 | 3/16" | 50 lb | 210 | 95832003350 |
| 1FG24 | 8d | 2 1/2" | 12.5 | 7/32" | 50 lb | 145 | 95832003367 |
| 1FG30 | 10d | 3" | 10.5 | 15/64" | 50 lb | 103 | 95832003374 |



OVAL HEAD SIDING

- Oval Head
- Diamond Point
- Round Smooth Shank

Used for blind nailing of cedar siding and clapboard.

| OVAL HEAD SIDING - HOT DIP GALVANIZED | | | | | | | |
|---------------------------------------|------|--------|-------|--------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1CH20 | 6d | 2" | 12 | 15/64" | 50 lb | 224 | 95832002001 |
| 1CH22 | 7d | 2 1/4" | 12 | 15/64" | 50 lb | 199 | 95832002018 |
| 1CH24 | 8d | 2 1/2" | 12 | 15/64" | 50 lb | 137 | 95832002025 |
| 1CH30 | 10d | 3" | 10.5 | 1/4" | 50 lb | 97 | 95832002032 |
| 1CH34 | 16d | 3 1/2" | 9 | 1/4" | 50 lb | 82 | 95832002056 |



SPIRAL OVAL HEAD SIDING

- Oval Head
- Diamond Point
- Spiral Shank

Used for blind nailing of cedar siding or particleboard-type siding where greater holding strength is required.

| SPIRAL OVAL HEAD SIDING - HOT DIP GALVANIZED | | | | | | | |
|--|------|--------|-------|-------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1FH22 | 7d | 2 1/4" | 12.5 | 3/16" | 50 lb | 215 | 95832003404 |

ROOFING



STANDARD ROOFING

- Flat Head
- Diamond Point
- Round Smooth Shank

Nail with an enlarged head suitable for preparing roofing, asphalt shingles, insulation board and felts.

| ROOFING - BRIGHT | | | | | | | |
|------------------------------|------|--------|-------|-------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1AU12 | | 1¼" | 10 | 7/16" | 50 lb | 169 | 95832005590 |
| 1AU14 | | 1½" | 10 | 7/16" | 50 lb | 143 | 95832005606 |
| ROOFING - HOT DIP GALVANIZED | | | | | | | |
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1CU07 | | ¾" | 10 | 7/16" | 50 lb | 212 | 95832003947 |
| 1CU10 | | 1" | 10 | 7/16" | 50 lb | 191 | 95832001318 |
| 1CU12 | | 1¼" | 10 | 7/16" | 50 lb | 156 | 95832001325 |
| 1CU14 | | 1½" | 10 | 7/16" | 50 lb | 133 | 95832005774 |
| 1CU16 | | 1¾" | 10 | 7/16" | 50 lb | 115 | 95832005743 |
| 1CU20 | | 2" | 10 | 7/16" | 50 lb | 101 | 95832005736 |
| 1CU24 | | 2½" | 10 | 7/16" | 50 lb | 83 | 95832006238 |
| 1CE05 | | 5/8" | 11 | 7/16" | 50 lb | 332 | 95832001868 |
| 1CE06 | | ¾" | 11 | 7/16" | 50 lb | 288 | 95832001875 |
| 1CE07 | | 7/8" | 11 | 7/16" | 50 lb | 251 | 95832001882 |
| 1CE10 | | 1" | 11 | 7/16" | 50 lb | 227 | 95832001899 |
| 1CE12 | | 1¼" | 11 | 7/16" | 50 lb | 187 | 95832001905 |
| 1CE14 | | 1½" | 11 | 7/16" | 50 lb | 159 | 95832001912 |
| 1CE16 | | 1¾" | 11 | 7/16" | 50 lb | 139 | 95832001929 |
| 1CE20 | | 2" | 11 | 7/16" | 50 lb | 123 | 95832001936 |
| 1CE24 | | 2½" | 11 | 7/16" | 50 lb | 99 | 95832001950 |
| 1CE30 | | 3" | 11 | 7/16" | 50 lb | 84 | 95832001967 |
| ROOFING - ELECTRO GALVANIZED | | | | | | | |
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1DU10 | | 1" | 10 | 7/16" | 50 lb | 205 | 95832003954 |
| 1DU12 | | 1¼" | 10 | 7/16" | 50 lb | 169 | 95832003473 |
| 1DU14 | | 1½" | 10 | 7/16" | 50 lb | 143 | 95832004975 |
| 1DU20 | | 2" | 10 | 7/16" | 50 lb | 110 | 95832005644 |
| 1DU24 | | 2½" | 10 | 7/16" | 50 lb | 89 | 95832005675 |
| 1DU30 | | 3" | 10 | 7/16" | 50 lb | 75 | 95832005750 |
| 1DU34 | | 3½" | 10 | 7/16" | 50 lb | 65 | 95832002612 |
| 1DE05 | | 5/8" | 11 | 7/16" | 50 lb | 366 | 95832002490 |
| 1DE06 | | ¾" | 11 | 7/16" | 50 lb | 316 | 95832002506 |
| 1DE07 | | 7/8" | 11 | 7/16" | 50 lb | 279 | 95832002513 |
| 1DE10 | | 1" | 11 | 7/16" | 50 lb | 249 | 95832002520 |
| 1DE12 | | 1¼" | 11 | 7/16" | 50 lb | 205 | 95832002537 |
| 1DE14 | | 1½" | 11 | 7/16" | 50 lb | 175 | 95832002544 |
| 1DE16 | | 1¾" | 11 | 7/16" | 50 lb | 152 | 95832002551 |
| 1DE20 | | 2" | 11 | 7/16" | 50 lb | 135 | 95832002568 |
| 1DE24 | | 2½" | 11 | 7/16" | 50 lb | 109 | 95832002582 |
| 1DE30 | | 3" | 11 | 7/16" | 50 lb | 92 | 95832002599 |

ROOFING



TILE

- Flat Head
- Diamond Point
- Round Smooth Shank

Used for the application of tile shingles.

| TILE - ELECTRO GALVANIZED | | | | | | | |
|---------------------------|------|--------|-------|----------------------------------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1D320 | | 4" | 9 | 1 ⁵ / ₃₂ " | 50 lb | 48 | 95832002940 |
| 1D326 | | 6" | 9 | 1 ⁵ / ₃₂ " | 25 lb | 32 | 95832006290 |



NEOPRENE ROOFING (RING SHANK)

- Flat Head
- Diamond Point
- Round Ringed Shank

For steel roofing and other flat roofing materials. Neoprene washer provides an effective waterproof seal.

| RINGED ROOFING WITH NEOPRENE WASHER - HOT DIP GALVANIZED | | | | | | | |
|--|------|---------------------------------|-------|------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 7SE14 | | 1 ¹ / ₂ " | 10 | 3/8" | 50 lb | 129 | 95832007426 |
| 7SE16 | | 1 ³ / ₄ " | 10 | 3/8" | 50 lb | 113 | 95832007433 |



PLASTIC CAP ROOFING (RING SHANK)

- Cap Head
- Diamond Point
- Round Ringed Shank

Plastic cap and ringed shank make it suitable for securely fastening felt, paper, canvas and other types of built-up roofing. Extra-large head provides additional holding power to securely fasten all roofing materials.

| PLASTIC CAP ROOFING - ELECTRO GALVANIZED | | | | | | | |
|--|------|---------------------------------|--------|------|---------|----------|-------------|
| Item # | Size | Length | Pieces | Head | Weight | Nails/lb | UPC |
| 7N537G | | 2" | 2000 | 1" | 12.7 lb | 169 | 95832017968 |
| 7N539G | | 2 ¹ / ₂ " | 2000 | 1" | 15.2 lb | 139 | 95832017975 |
| 7N540G | | 3" | 2000 | 1" | 17.8 lb | 119 | 95832017982 |



SHAKE

- Flat Head
- Blunt Point
- Round Smooth Shank

For cedar shingle and shake applications. Blunt point reduces splitting.

| SHAKE - HOT DIP GALVANIZED | | | | | | | |
|----------------------------|------|---------------------------------|-------|----------------------------------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1C076 | 5d | 1 ³ / ₄ " | 14 | 5 ⁵ / ₃₂ " | 50 lb | 345 | 95832002216 |

ROOFING



SHINGLE (FINE)

- Flat Head
- Diamond Point
- Round Smooth Shank

Fine nails suitable for nailing wood lath and lattice.

| SHINGLE (FINE) - HOT DIP GALVANIZED | | | | | | | |
|-------------------------------------|------|--------|-------|---------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1C054 | 3d | 1 1/8" | 15 | 1 1/64" | 50 lb | 659 | 95832002209 |



NON-SPLIT SHINGLE

- Flat Head
- Diamond Point
- Round Smooth Shank

Used for the application of heavy cedar shakes and shingles.

| NON-SPLIT SHINGLE - HOT DIP GALVANIZED | | | | | | | |
|--|------|--------|-------|---------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1C214 | | 1 1/2" | 12.5 | 1 9/64" | 50 lb | 251 | 95832000052 |



EAVESTROUGH / GUTTER SPIKE

- Flat Checkered Head
- Diamond Point
- Round Smooth Shank

Used for attaching eavestroughs and gutters.

| EAVESTROUGH/GUTTER - HOT DIP GALVANIZED | | | | | | | |
|---|------|--------|-------|-------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1CM64 | | 8" | 6 | 7/16" | 50 lb | 14 | 95832006320 |
| 1CM90 | | 9" | 5 | 9/16" | 50 lb | 11 | 95832008218 |

| EAVESTROUGH/GUTTER - ELECTRO GALVANIZED | | | | | | | |
|---|------|--------|-------|-------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1DM62 | | 7" | 6 | 7/16" | 50 lb | 17 | 95832005316 |
| 1DM64 | | 8" | 6 | 7/16" | 50 lb | 15 | 95832005323 |



SPIRAL EAVESTROUGH / GUTTER SPIKE

- Flat Checkered Head
- Diamond Point
- Spiral Shank

Used for attaching eavestroughs and gutters where additional holding power is required.

| SPIRAL EAVESTROUGH - HOT DIP GALVANIZED | | | | | | | |
|---|------|--------|-------|------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1FM60 | | 6" | 5 | 1/2" | 50 lb | 19 | 95832003442 |
| 1FM70 | | 7" | 5 | 1/2" | 50 lb | 16 | 95832005415 |
| 1FM72 | | 7" | 6 | 1/2" | 50 lb | 19 | 95832009253 |
| 1FM80 | | 8" | 5 | 1/2" | 50 lb | 13 | 95832003459 |

FLOORING & DECKING



RING SHANK UNDERLAY FLOORING

- Flat Countersunk Head
- Diamond Point
- Round Ringed Shank

Used for nailing particleboard, plywood and sub-flooring over existing wood floors or joists where superior holding power is essential.

| RING SHANK UNDERLAY FLOORING - BRIGHT | | | | | | | |
|---------------------------------------|------|--------|-------|--------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1GP12 | | 1¼" | 14 | ¾" | 50 lb | 514 | 95832003817 |
| 1GP14 | | 1½" | 12.5 | ¾" | 50 lb | 297 | 95832003824 |
| 1GP16 | | 1¾" | 12.5 | ¾" | 50 lb | 255 | 95832003848 |
| 1GP17 | | 1⅞" | 12 | 17/64" | 50 lb | 210 | 95832003855 |
| 1GP21 | | 2⅛" | 12 | 17/64" | 50 lb | 185 | 95832003862 |
| 1GP23 | | 2⅜" | 11.5 | 17/64" | 50 lb | 145 | 95832003879 |



FLUTED FLOORING

- Flat Head
- Needle Point
- Fluted Shank

Used as a standard finishing nail for attaching hardwood flooring or parquet flooring. Fluted thread increases holding power which resists loosening and squeaking.

| FLUTED FLOORING - TEMPER HARDENED | | | | | | | |
|-----------------------------------|------|--------|-------|------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 7PP16 | | 1¾" | 16 | ¾" | 50 lb | 660 | 95832007419 |



SPIRAL DECKING

- Flat Countersunk Checkered Head
- Diamond Point
- Spiral Shank

For use in permanent applications where superior holding power and enduring strength are essential. Commonly used for flooring, sheathing and decking. Hot dip galvanized approved for use with pressure treated lumber.

| SPIRAL DECKING - HOT DIP GALVANIZED | | | | | | | |
|-------------------------------------|------|--------|-------|-------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1F020 | 6d | 2" | 10.5 | 9/32" | 50 lb | 143 | 95832005392 |
| 1F024 | 8d | 2½" | 10.5 | 9/32" | 50 lb | 115 | 95832004524 |
| 1F030 | 10d | 3" | 9.75 | 9/32" | 50 lb | 88 | 95832004623 |
| 1F032 | 12d | 3¼" | 9.75 | 9/32" | 50 lb | 81 | 95832004630 |
| 1F034 | 16d | 3½" | 9 | 5/16" | 50 lb | 64 | 95832005408 |
| 1F040 | 20d | 4" | 8 | 3/8" | 50 lb | 45 | 95832004548 |
| 1F050 | 40d | 5" | 7 | 3/8" | 50 lb | 29 | 95832004531 |

FLOORING & DECKING



RING SHANK DECKING

- Flat Countersunk Checkered Head
- Diamond Point
- Round Ringed Shank

Used for application of wood decks where superior holding strength is required.

| RING SHANK DECKING - HOT DIP GALVANIZED | | | | | | | |
|---|------|--------|-------|-------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1S250 | 6d | 2" | 11.5 | 9/32" | 50 lb | 160 | 95832005088 |
| 1S251 | 8d | 2½" | 11 | 9/32" | 50 lb | 131 | 95832005149 |
| 1S256 | 10d | 3" | 10 | 9/32" | 50 lb | 95 | 95832005224 |
| 1S252 | 16d | 3½" | 10 | 5/16" | 50 lb | 57 | 95832005156 |
| 1S260 | 20d | 4" | 9 | 3/8" | 50 lb | 36 | 95832005309 |

SPECIALTY USE



FLUTED MASONRY

- Flat Countersunk Head
- Diamond Point
- Fluted Shank

For fastening lumber to any type of concrete or masonry work. Predrilling may be necessary in some applications. For best holding power, choose a length that will penetrate ¾" into the masonry. Solid blows at right angles provide the best results.

| FLUTED MASONRY - TEMPER HARDENED | | | | | | | |
|----------------------------------|------|--------|-------|---------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 7P206 | | ¾" | 9 | 5/16" | 50 lb | 230 | 95832007259 |
| 7P210 | | 1" | 9 | 5/16" | 50 lb | 180 | 95832007273 |
| 7P212 | | 1¼" | 9 | 5/16" | 50 lb | 147 | 95832007280 |
| 7P214 | | 1½" | 9 | 5/16" | 50 lb | 125 | 95832007297 |
| 7P216 | | 1¾" | 9 | 5/16" | 50 lb | 108 | 95832007303 |
| 7P220 | | 2" | 9 | 5/16" | 50 lb | 96 | 95832007310 |
| 7P222 | | 2¼" | 9 | 5/16" | 50 lb | 86 | 95832007327 |
| 7P224 | | 2½" | 9 | 5/16" | 50 lb | 78 | 95832007334 |
| 7P230 | | 3" | 9 | 5/16" | 50 lb | 65 | 95832007341 |
| 7P234 | | 3½" | 9 | 1 1/32" | 50 lb | 47 | 95832007358 |
| 7P240 | | 4" | 9 | 3/8" | 50 lb | 35 | 95832007488 |



FURRING NAIL

- Flat Head
- Diamond Point
- Round Smooth Shank

Used for the installation of woven wire stucco netting. Wad made of virgin material.

| FURRING NAILS - ELECTRO GALVANIZED | | | | | | | |
|------------------------------------|----------------|--------|-------|-------|--------|----------|-------------|
| Item # | Wad/ No Wad | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1DE14 | no wad | 1½" | 11 | 7/16" | 50 lb | 152 | 95832002544 |
| 1FN14 | wad | 1½" | 11 | 7/16" | 35 lb | 143 | 95832009680 |
| 1FN16 | wad | 1¾" | 11 | 7/16" | 39 lb | 128 | 95832009697 |

SPECIALTY USE



FENCE STAPLES

- Cut Point
- Round Smooth Shank

Used for attaching round wire fencing to posts and frames.

| FENCE STAPLES - ELECTRO GALVANIZED | | | | | | | |
|------------------------------------|------|--------|-------|------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1DK10 | | 1" | 9 | | 50 lb | 101 | 95832002803 |
| 1DK12 | | 1¼" | 9 | | 50 lb | 81 | 95832002810 |
| 1DK13 | | 1¼" | 12 | | 50 lb | 81 | 95832005828 |
| 1DK14 | | 1½" | 9 | | 50 lb | 68 | 95832002827 |
| 1DK16 | | 1¾" | 9 | | 50 lb | 58 | 95832002834 |
| 1DK20 | | 2" | 9 | | 50 lb | 51 | 95832002841 |

| FENCE STAPLES - HOT DIP GALVANIZED | | | | | | | |
|------------------------------------|------|--------|-------|------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1CK06 | | ¾" | 14 | | 50 lb | 320 | 95832006689 |
| 1CK12 | | 1¼" | 9 | | 50 lb | 87 | 95832006634 |
| 1CK14 | | 1½" | 9 | | 50 lb | 72 | 95832004999 |
| 1CK16 | | 1¾" | 9 | | 50 lb | 61 | 95832006641 |
| 1CK20 | | 2" | 9 | | 50 lb | 58 | 95832005057 |



HEAVY-DUTY DOUBLE-BARBED FENCE STAPLES

- Cut Point
- Barbed Shank

Used for additional holding power.

| HD DOUBLE-BARBED FENCE STAPLES - HOT DIP GALVANIZED | | | | | | | |
|---|------|--------|-------|------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 7CK81G | | 1¼" | 8 | | 50 lb | 48 | 00251074751 |
| 7CK82G | | 2" | 8 | | 50 lb | 42 | 00251074775 |



POULTRY NETTING STAPLES

- Cut Point
- Round Smooth Shank

Used for attaching poultry netting to wood framing.

| POULTRY NETTING STAPLES - ELECTRO GALVANIZED | | | | | | | |
|--|------|--------|-------|------|--------|----------|-------------|
| Item # | Size | Length | Gauge | Head | Weight | Nails/lb | UPC |
| 1DK06 | | ¾" | 14 | | 50 lb | 341 | 95832002780 |
| 1DK07 | | ⅞" | 13 | | 50 lb | 310 | 95832002797 |

Tree Island Steel

USA: 1 (800) 255-6974

CANADA: 1 (800) 663-0955

www.treeisland.com

