

TREMCO®

Commercial Sealants & Waterproofing

Tremco offers corrosion-resistant fluid-applied flashing to prevent moisture from entering the wall cavity or penetration of water to the building structural framing components.

Dymonic® 100 Flashing & Spectrem® Silicones

Fluid-Applied Flashing





Basic uses

- Rough openings in both masonry and exterior sheeting applications
- Exterior window, door and sliding glass door openings
- Penetrations and termination of exterior wall assemblies
- Where wood-frame construction attaches to concrete
- At wall and roof intersections

Benefits

- Can be applied to damp or green concrete
- Fast, UV stable cure
- Primerless adhesion to most substrates
- Corrosion-resistant flashing
- Single-lift application without mesh, laps or seams
- Proven, tested connectivity from wall to window
- Approved for use as per Florida Building Code 1405.4 and Residential Code R703.8

FLUID-APPLIED FLASHING Dymonic® 100 and Spectrem® Silicones

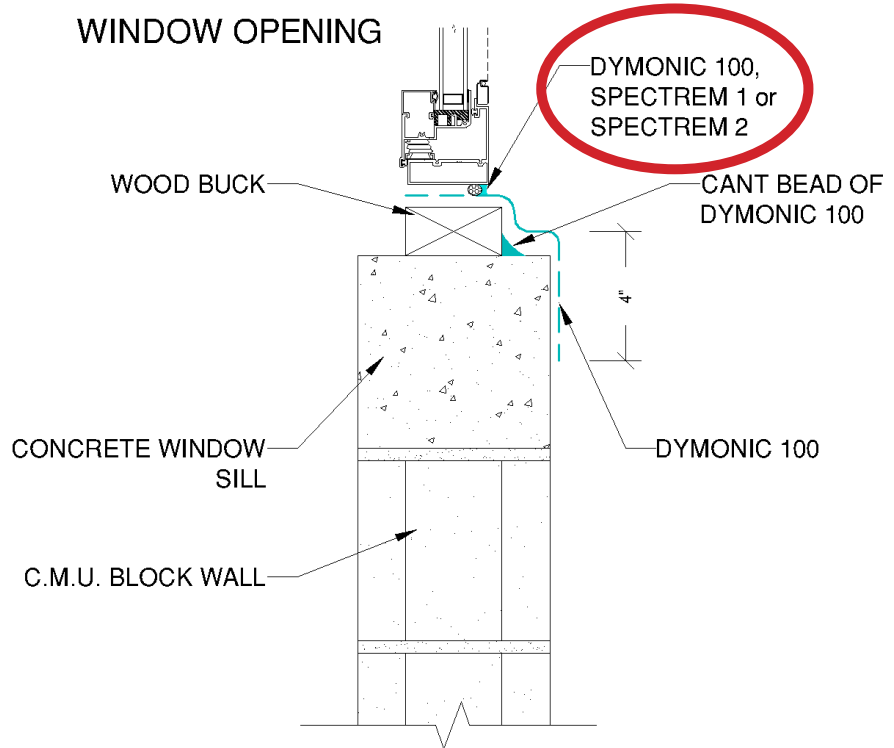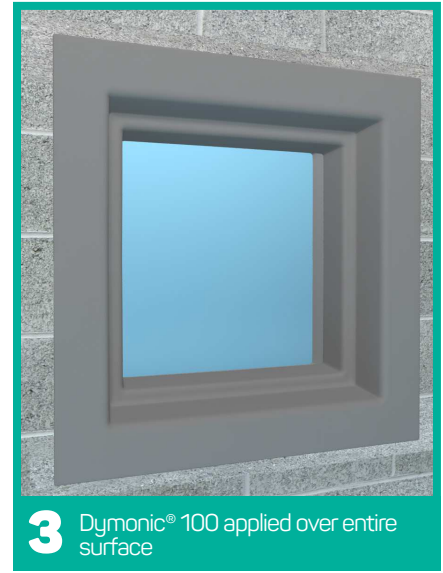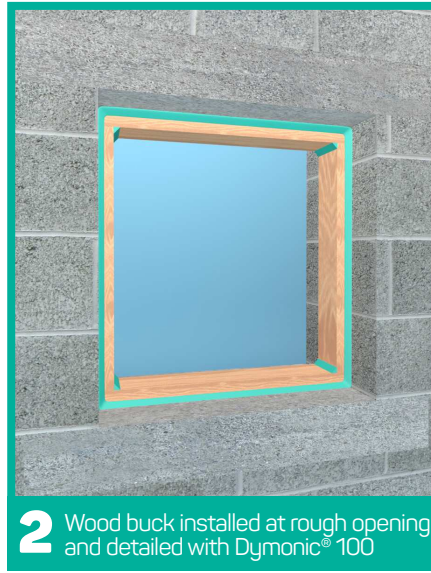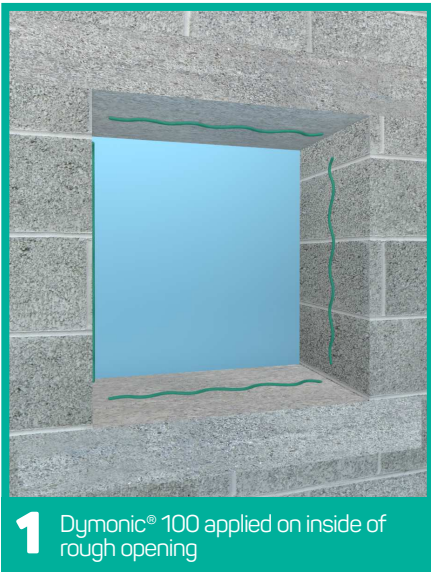

DYMONIC® 100 APPLICABLE STANDARDS

ASTM C920 Sealant Specification Class 50, Grade NS, Type S

AAMA 714 Voluntary Specification for Liquid-Applied Flashing

ASTM E2357 Air Leakage of Assemblies (applied as liquid-applied flashing in multiple assemblies)

ASTM E331 Water Penetration of Assemblies (applied as liquid-applied flashing in multiple assemblies)

NFPA 285 Fire Assembly Testing (applied as liquid-applied flashing in multiple assemblies)

ASTM E84 Surface Burning Characteristics