

TREMPROOF® PUMA HORIZONTAL WATERPROOFING

Split slab, paver systems and vegetated roof membranes

Features & Benefits

- Extreme durability with exceptional crack-bridging characteristics, eliminating the need for reinforcing fabric
- 30 to 45 minute cure time between coats; ability to proceed to overburden 1 hour after application
- Can be applied at temperatures as low as to 14 °F (-10 °C)
- Zero Volatile Organic Compounds (VOCs)
- Compatible with approved Tremco sealants and coatings
- Premium waterproofing system backed by an all-inclusive warranty




TREMPROOF® PUMA
Horizontal Application



TREMproof PUMA Horizontal System

PRODUCT	COVERAGE RATE	WET MILS	COMMENTS
1: Tremco PUMA Primer	90 ft ² /gal	17	Lightly broadcast silica sand.
2: Tremco PUMA BC	20 ft ² /gal	80	Allow 45 min to cure before proceeding.
3: TREMDrain	N/A	N/A	Applicable TREMDrain series drainage mat
4: Compatible Insulation (optional)	N/A	N/A	By others
5: Overburden	N/A	N/A	Topping slab or vegetated roof

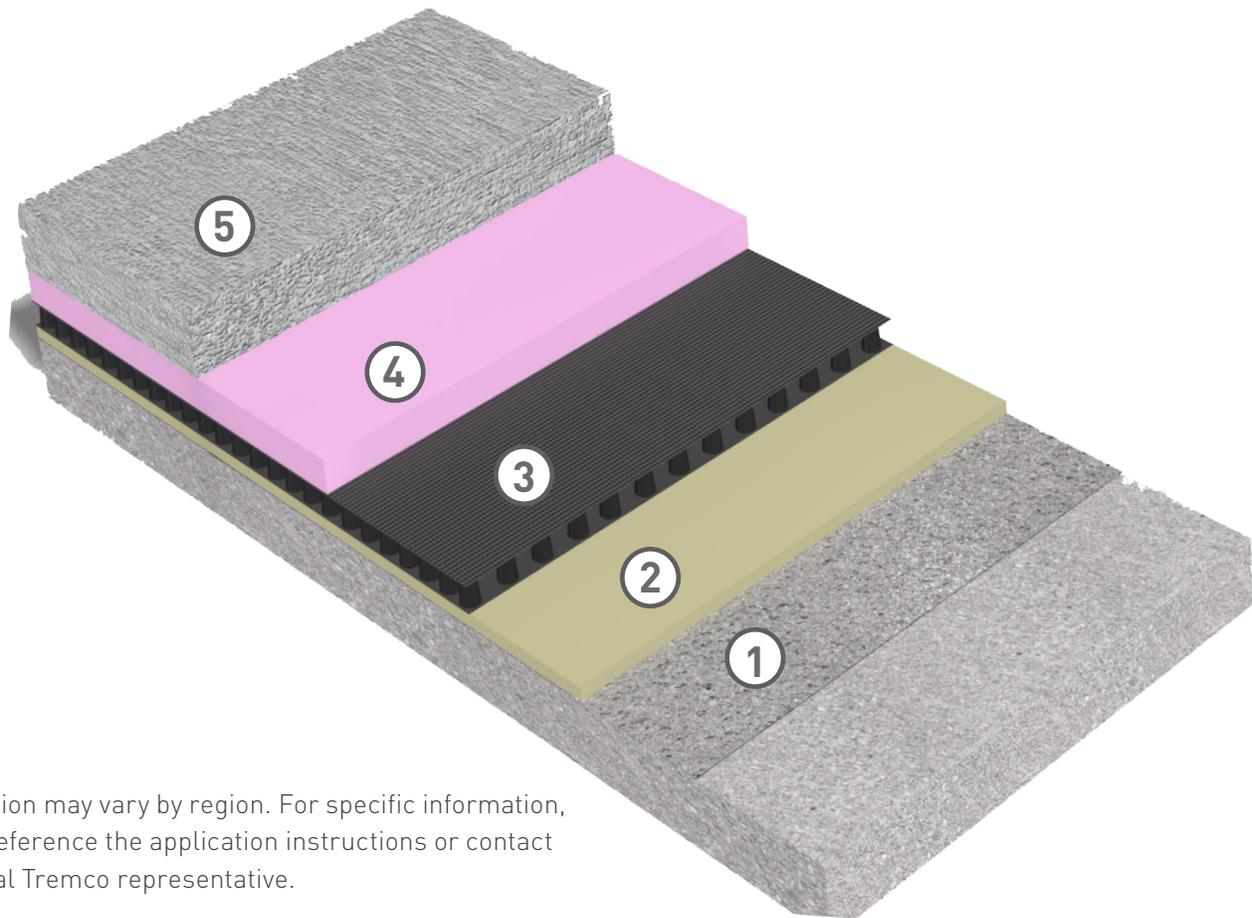

Information may vary by region. For specific information, please reference the application instructions or contact your local Tremco representative.

Tremco Commercial Sealants & Waterproofing | 3735 Green Road | Beachwood, OH 44122 | US: 800.852.9068 | CAN: 800.363.3213 | tremcosealants.com

Tremco Construction Products Group (CPG) brings together Tremco Incorporated's Commercial Sealants & Waterproofing and Roofing & Building Maintenance operating divisions; Dryvit Systems, Inc.; Nudura Inc.; Willseal; Weatherproofing Technologies, Inc. and Weatherproofing Technologies Canada, Inc.

 **TREMCO**
Construction Products Group

Tremco® and TREMproof® are registered trademarks of Tremco Incorporated.
Use of the ® symbol indicates registration with the US Patent & Trademark Office and the Canadian Intellectual Property Office.

1220/TPPHWPSS

tremcocpg.com