

VR TecTape


TECHNICAL TAPE FOR SEALING SEAMS
IN VEGETATED ROOF ASSEMBLIES

PRODUCT DESCRIPTION

Description Self-adhered, waterproof membrane with acrylic pressure-sensitive adhesive, designed for sealing on difficult-to-stick-to surfaces. This tape is temperature tolerant and adheres to damp surfaces.

Options

VR TecTape 2 2-inch wide roll
VR TecTape 4 4-inch wide roll

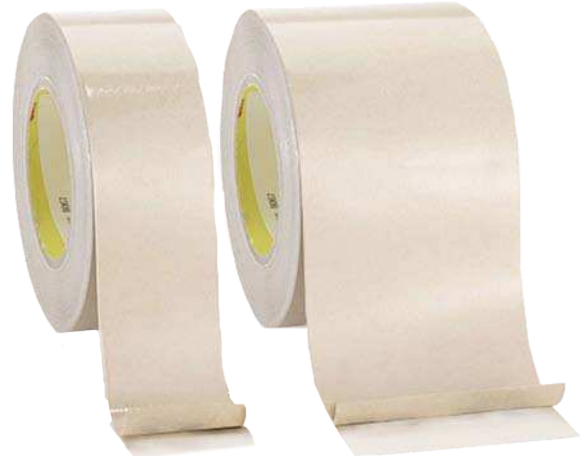

PRODUCT PROPERTIES

Material Film backing lined /w acrylic adhesive

Dimensions

VR TecTape 2 2-inch x 75 ft roll (50 mm x 23 m)
VR TecTape 4 4-inch x 75 ft roll (100 mm x 23 m)

Tape Thickness 9.9 mil (0.25 mm)

Adhesion Properties

Polyethylene/ 60 oz./inch width (66 N/100 mm)
Polypropylene

Anodized Aluminum:

After 7 days at 176° F 70 oz./in. width (77 N/100 mm)
After 7 days in water 65 oz./in. width (71 N/100 mm)
After Thermal Cycling 75 oz./in. width (82 N/100 mm)
After UV Exposure 60 oz./in. width (66 N/100 mm)

Permeability 0.17 perms

Nail Sealability

Initial Test: Pass
After Thermal Cycling: Pass

Temperature

Service Range -40 to -176°F (-40 to 80°C)

Application Range 0 - 120°F (-18 to 49°C)

Additional Info

Use VR TecTape 2 required to be used for sealing VR RootBloc, VR Filter Fabric, VR AeroMat, & VR HydraPanel 0.40.

VR TecTape 4 required as accessory to be used in conjunction with modular

Tremco Commercial Sealants & Waterproofing

UNITED STATES
3735 Green Road
Beachwood, Ohio,
44122
T: 1.800.321.7906

CANADA
220 Wicksteed Avenue
Toronto, Ontario
M4H 1G7
T: 1.800.363.3213

Tremco Roofing & Building Maintenance

UNITED STATES
3735 Green Road,
Beachwood, Ohio
44122
T: 1.800.526.2728

CANADA
50 Beth Neelson Drive
Toronto, Ontario
M4H 1M6
T: 1.800.668.9879

PRODUCT SPECIFICATION DATA SHEET

VR TecTape

TECHNICAL TAPE FOR SEALING SEAMS
FOR VEGETATED ROOF ASSEMBLIES

GUARANTEE / WARRANTY

Tremco Incorporated warrants VR TecTape to be free of defects and to meet published physical properties when tested according to ASTM and Tremco standards. Under this warranty, any VR TecTape product that is proved to be defective when applied in accordance to our written instructions, and in applications recommended by Tremco as suitable for this product will be replaced with like product at no charge.

THIS IS BUYER'S SOLE AND EXCLUSIVE REMEDY.

All claims concerning product defects must be made in writing within twelve (12) months of shipment. The absence of such claims in writing during this period will constitute a waiver of all claims with respect to such product. This warranty shall be IN LIEU OF any other warranty, express or implied, including but not limited to, any implied warranty of MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

TREMCO[®]

www.tremcosealants.com
www.tremcoroofing.com

© 2017 Tremco Incorporated

Tremco Commercial Sealants & Waterproofing

UNITED STATES
3735 Green Road
Beachwood, Ohio,
44122
T: 1.800.321.7906

CANADA
220 Wicksteed Avenue
Toronto, Ontario
M4H 1G7
T: 1.800.363.3213

Tremco Roofing & Building Maintenance

UNITED STATES
3735 Green Road,
Beachwood, Ohio
44122
T: 1.800.526.2728

CANADA
50 Beth Nealson Dr
Toronto, Ontario
M4H 1M6
T: 1.800.668.9879