

VULKEM® EWS HEAVY DUTY SYSTEM

Extremely durable system for parking structures affected by snow plows, dumpster areas and loading docks

Features & Benefits


- Minimal downtime (approximately 30 to 45 min) between application coats, even in cold temperatures.
- Open to vehicular traffic within one hour after application completion.
- Polyurethane-methacrylate (PUMA) technology delivers extreme durability, decorative functionality and crack bridging capabilities.
- Can be applied in temperatures as low as 14° F (-10° C)



Vulkem® EWS Heavy-Duty System Application

Vulkem EWS Heavy-Duty System

PRODUCT	COVERAGE RATE	WET MILS	COMMENTS
1: Tremco PUMA Primer	90 ft ² /gal	17	Lightly broadcast silica sand.
2: Tremco PUMA BC	20 ft ² /gal	80	Allow 45 min to cure before proceeding.
3: Tremco PUMA WC with PUMA filler powder	16 ft ² /gal	100	Broadcast aluminum oxide (bauxite) to refusal. Allow 45 min to cure before proceeding.
4: Tremco PUMA TC	53 to 90 ft ² /gal	17 to 30	Allow 60 min to cure before opening to traffic.

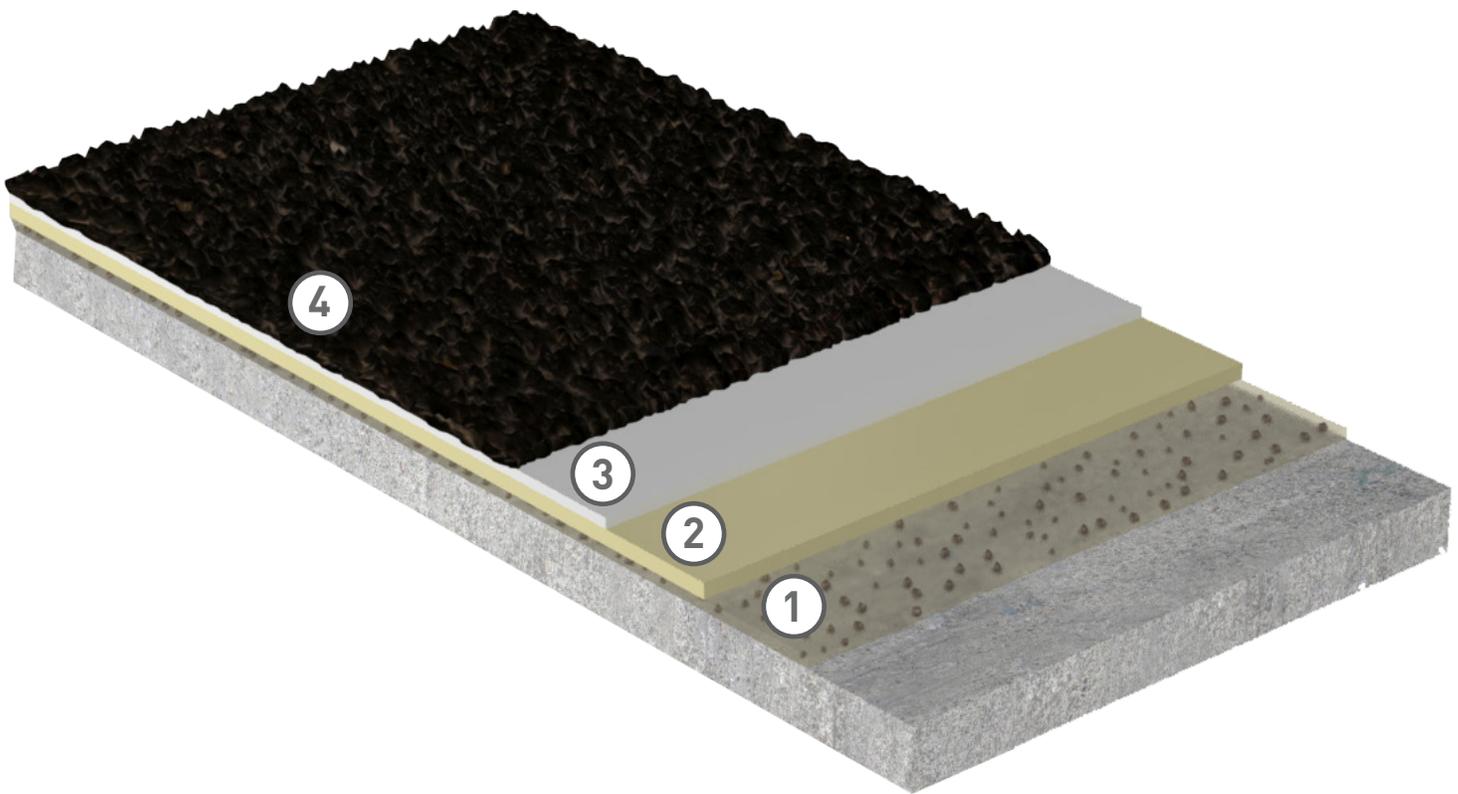

Information may vary by region. For specific information, please reference the application instructions or contact your local Tremco representative.

Tremco Commercial Sealants & Waterproofing | 3735 Green Road | Beachwood, OH 44122 | US: 800.852.9068 | CAN: 800.363.3213 | tremcosealants.com

Tremco Construction Products Group (CPG) brings together Tremco Incorporated's Commercial Sealants & Waterproofing and Roofing & Building Maintenance operating divisions; Dryvit Systems, Inc.; Nudura Inc.; Willseal; Weatherproofing Technologies, Inc. and Weatherproofing Technologies Canada, Inc.

 **TREMCO**
Construction Products Group

Tremco® and Vulkem® are registered trademarks of Tremco Incorporated.
Use of the ® symbol indicates registration with the US Patent & Trademark Office and the Canadian Intellectual Property Office.

1220/EWSHeavySS

tremcocpg.com