



What is Mud-Max ?

In the simplest terms, Mud-Max is an acrylic glue (60 % by volume) that is added to drywall finishing compounds, textures and plaster products. Mud-Max is designed to improve the strength and adhesive performance of drywall compounds, textures and plasters when bonding to drywall, metal beads and vinyl beads. Lab tests have shown as much as 100 % improvement in shear strength depending on the compound used (see the chart to the right).

How does Mud-Max affect the workability of the drywall compound ?

Mud-Max improves the smoothness, creaminess and workability of the drywall compound while increasing the adhesive performance. Thinning your compound with water only weakens it and increases shrinkage. So if you have to add something to your drywall compound, add Mud-Max.

Where do I use Mud-Max ?

Mud-Max can be added to ready-mix compounds, powdered compounds as well as texture and plaster products. Use on all plain metal and plastic corner beads. With today's larger homes and more spacious interiors come greater problems with settling and movement. A typical 20' wide ceiling specified at L/480 will have an expected sag of 1/2". Wet lumber and sudden temperature changes further contribute to settling and movement. The performance of the wide array of drywall compounds available can also vary significantly. Mud-Max is designed to give the drywall contractor a fighting chance in these conditions.

Can I use Mud-Max on my taped joints ?

We believe there shouldn't be any adverse effects using Mud-Max on taped joints. Early indications show excellent results, however, we do not have enough field data to make any guarantees regarding the use of Mud-Max in this application. Use at your own discretion. You may wish to test it in a small obscure area. We welcome any feedback regarding this application.

How much Mud-Max should I use ?


For optimum performance use 1 - 1 1/2 % Mud-Max. Full usage directions are printed on the bottle. One Gallon of Mud-Max will treat up to 16 buckets or 16 boxes of compound.

What else do I need to know about Mud-Max ?

Always read the warning labels and usage instructions on the bottle before using Mud-Max. Similar to drywall compounds, Mud-Max must not be subjected to freezing. The normal product appearance is a slightly thick milky white. If the product looks separated or full of large or small chunks, it has been frozen and should not be used. Also, be aware that adding Mud-Max to your drywall compound may affect the drywall compound manufacturer's warranty.

LIMITATION OF REMEDIES AND LIABILITY.

Use of Mud-Max (the "Product") represents acceptance of these terms. If these terms are not acceptable, return the Product at once unused. Use of the Product may affect Buyer's compound, texture or plaster manufacturer's warranty. TRIM-TEX INC. ("TRIM-TEX") assumes no warranty liability for any other manufacturer's product used by Buyer in which a product of Trim-Tex is attached to or made a part of said product. If the Product is proved to be defective, THE EXCLUSIVE REMEDY AT TRIM-TEX'S OPTION SHALL BE TO REFUND THE PURCHASE PRICE OR TO REPLACE THE DEFECTIVE PRODUCT. TRIM-TEX shall not otherwise be liable for loss or damage, whether direct, indirect, special, incidental, consequential, punitive, lost profits or commercial losses, regardless of the legal basis asserted, including contract, tort, negligence, implied or express warranty or strict liability. Contact TRIM-TEX for any additional information.

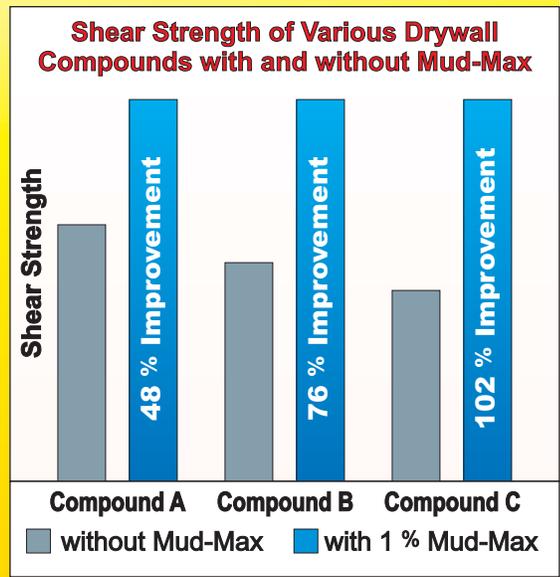

DO NOT FREEZE

STOCK #	PCS/ BOX
850	1 case = 4 Gallons