

USG ASPEN™ BASIC ACOUSTICAL PANELS



USG Aspen™ Basic Acoustical Panels/
USG Donn® Brand DX® Acoustical
Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- Random, naturally sculptured appearance offers upscale look without upscale cost.
- Sizes and performance meet most design criteria.
- Suitable for general applications.
- USDA Certified Biobased Product.⁴


APPLICATIONS

- Schools
- General offices
- Retail stores

SUBSTRATE

- Wet-formed mineral fiber

Medium-Textured Panel

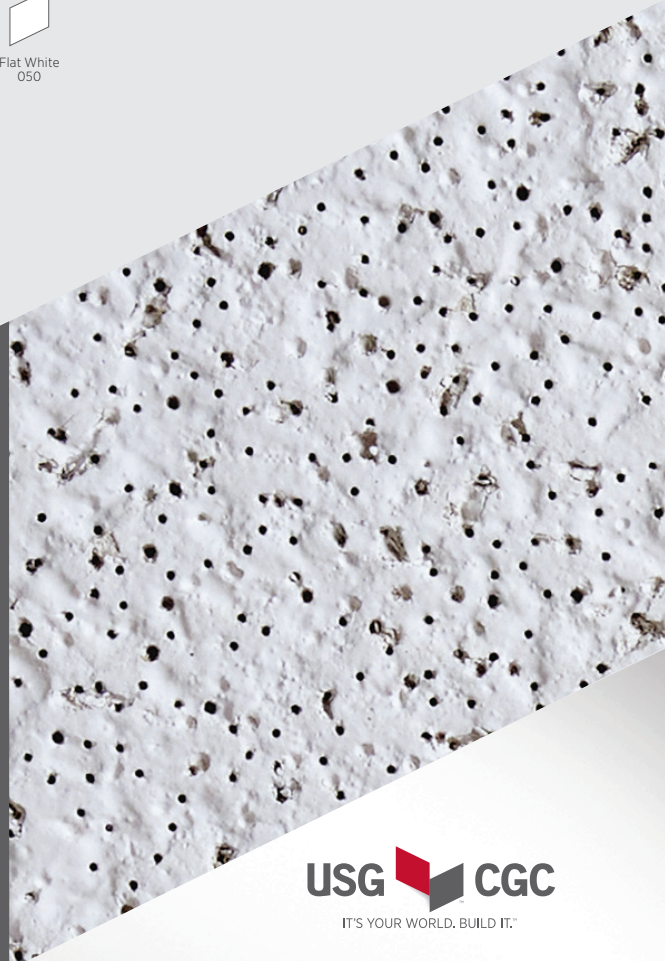

USG ASPEN™ BASIC ACOUSTICAL PANELS

ORDER SAMPLES/LITERATURE
USG: usg.com or sampllit@usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800.USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com





PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL 2818




USG ASPEN™ BASIC PANELS

USG ASPEN™ BASIC ILLUSION™ TWO/24 PANELS

FACE-CUT PATTERNS

Edge	Panel Size	Fire Rating	Item No.	UL Classified			Color	Grid Options	VOC Emissions	Recycled Content¹	Panel Cost
				NRC	CAC Min.	LR²					
 SLT	2'x2'x3/4"	Class A	650	0.55	35	0.87	White	A	Low	41%	\$\$
	2'x4'x3/4"	Class A	651	0.55	35	0.87	White	A	Low	41%	\$\$
 SLT³	2'x4'x3/4"	Class A	652	0.55	35	0.87	White	A	Low	41%	\$\$

USG Aspen™ Basic Illusion™ Two/24




The look of 2'x2' panels

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available at spot.ul.com.

GRID PROFILE OPTIONS

A USG DX®



PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC1809

ASTM E1264 classification

USG Aspen™ Basic: Type III, Form 2, Pattern CDFI
USG Aspen™ Basic Illusion™: Type III, Form 2, Pattern CDFIK

ASTM E84 and CAN/ULC S102 surface-burning characteristics

Class A
Flame spread: 25 or less
Smoke developed: 50 or less

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance

R-1.7 (3/4" panels)

Weight

0.92 lb./sq. ft. (Class A)
0.92 lb./sq. ft. (Illusion)

Maximum backloading

See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance

Can be cleaned easily with a soft brush or vacuum.

Metric sizes available

Contact sales for minimum quantities and lead times.

Notes

- For details, see USG Sustainability tool at usgdesignstudio.com or cgcdesignstudio.com.
- LR values are shown as averages.
- Panels have a 15/16" routing.
- This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1809/rev. 2-23

© 2023 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, ASPEN, DONN, DX, ILLUSION, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

