


# USG DONN® BRAND ADVANCESPAN™

USG DONN® BRAND DXAS™ AND DXTAS™ PROFILES

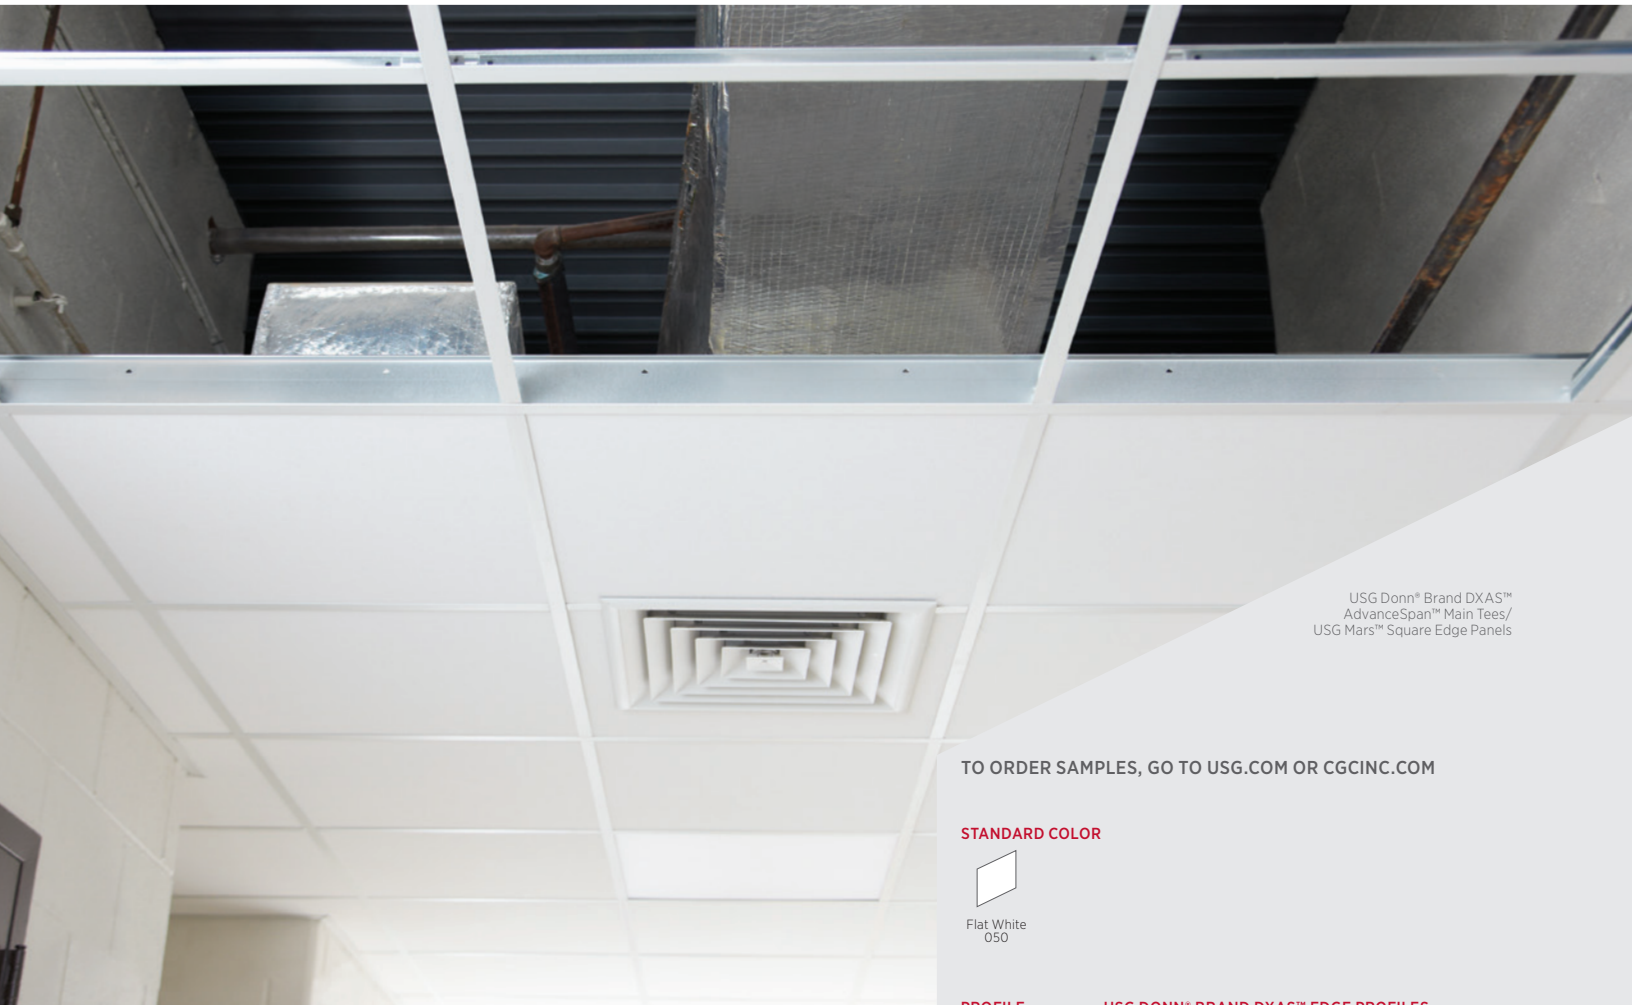

USG Donn® Brand DXAS™  
AdvanceSpan™ Main Tees/  
USG Mars™ Square Edge Panels

TO ORDER SAMPLES, GO TO [USG.COM](http://USG.COM) OR [CGCINC.COM](http://CGCINC.COM)

## STANDARD COLOR




Flat White  
050


## PROFILE



## USG DONN® BRAND DXAS™ EDGE PROFILES

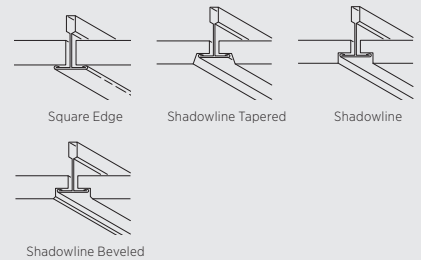

## USG DONN® BRAND DXTAS™ EDGE PROFILES

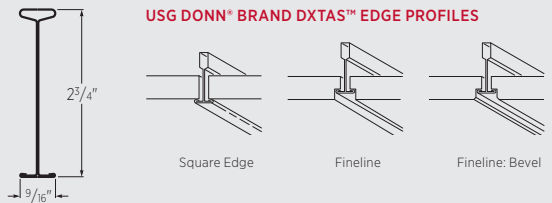

## FEATURES AND BENEFITS

- Spans up to 8' with no hanger wires.
- Ideal for healthcare, hospitality and multifamily applications with crowded plenum spaces.
- Seismic installation designs validated in ICC-ES Evaluation Report ESR-5136.
- Approved by OSHPD/HCAi for seismic applications.
- USG Donn® Brand DX®-15/16" and USG Donn® Brand Centricitee™ DXT™-9/16" face profiles available.
- Reversible structural wall channel works with both USG DX® and DXT™ profiles.
- Compatible with all standard USG DX® and DXT™ cross tees.
- Available with End Splice detail to speed up installation.
- USG Donn® Brand AdvanceSpan™ Suspension System is part of the Ecoblueprint™ portfolio — meeting today's sustainability standards. For sustainability documentation go to [USG.com](http://USG.com) or [CGCInc.com](http://CGCInc.com).

## APPLICATIONS

- Hospitals
- Multifamily dwellings
- Hotels
- Schools
- General interior use applications

# USG DONN® BRAND ADVANCESPAN™

USG DONN® BRAND DXAS™ AND DXTAS™ PROFILES

ORDER SAMPLES/LITERATURE  
 USG: usg.com or samplitt@usg.com  
 CGC: contact Sales Representative

TECHNICAL SERVICES  
 800 USG.4YOU (874-4968)



FOR MOST UP-TO-DATE  
 TECHNICAL INFORMATION  
 AND LEED REPORT TOOL  
 usgdesignstudio.com  
 cgcdesignstudio.com



Declare® Labels on select finishes, see usg.com for more details and documentation.

## 15/16" TEE SYSTEM

Main Tee



Cross Tee 1"




Cross Tee 1-1/2"




## 9/16" TEE SYSTEM


Main Tee



Cross Tee 1-1/2"



## MOLDING



Item No	Length	Height	Face Profile	Fire Rating	Recycled Content	Color	Max Unsupported Span at Rated Load	
							Intermediate Duty (12 lb./LF)	Heavy Duty (16 lb./LF)
<b>DXAS</b>	8'-6" 10'-6" 12'-6"	2-3/4"	15/16"	Class A		Flat White 050	8'-0"	7'-0"
<b>DXAS-ES</b>	10'-0" 12'-0"	2-3/4"	15/16"	Class A		Flat White 050	8'-0"	7'-0"
<b>DX216</b>	2' 600 mm	1" (25 mm)	15/16"	Class A		Flat White 050		
<b>DXL424</b>	4' 1200 mm	1-1/2" (38 mm)	15/16"			Flat White 050		
<b>DXL424HRC</b>			15/16"			Flat White 050		
<b>DX422</b>			15/16"	Class A		Flat White 050		
<b>DX422HRC</b>			15/16"	Class A		Flat White 050		
<b>DX426HD</b>			15/16"	Class A		Flat White 050		
<b>DXTAS</b>	8'-6" 10'-6" 12'-6"	2-3/4"	9/16"	Class A		Flat White 050	8'-0"	7'-0"
<b>DXTAS-ES</b>	10'-0" 12'-0"	2-3/4"	9/16"	Class A		Flat White 050	8'-0"	7'-0"
<b>DXT222</b>	2' 600 mm	1-1/2" (38 mm)	9/16"	Class A		Flat White 050		
<b>DXT222HRC</b>			9/16"	Class A		Flat White 050		
<b>DXLT222</b>			9/16"			Flat White 050		
<b>DXT422</b>	4' 1200 mm	1-1/2" (38 mm)	9/16"	Class A		Flat White 050		
<b>DXT424</b>			9/16"	Class A		Flat White 050		
<b>DXT424HRC</b>			9/16"	Class A		Flat White 050		
<b>DXLT424</b>			9/16"			Flat White 050		
<b>DXT426</b>			9/16"	Class A		Flat White 050		
<b>Channel</b>	<b>Length</b>	<b>Height</b>	<b>Face Profile</b>	<b>Item No</b>	<b>Recycled Content</b>	<b>Color</b>		
	10'	2-7/8"	Reversible for 15/16" or 9/16"	<b>US44HRC</b>		Flat White 050		

\*Tested in accordance with ASTM C635 modified.




**Low Emissions (VOC)**  
 CDPH 01350 v1.2-2017 compliance on select finishes, see usg.com for more details and documentation.

**High Recycled Content**  
 USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.




Declare® Labels on select finishes, see usg.com for more details and documentation.

ACCESSORIES

ASMTSP Splice Plate	US44CC Channel Clip	ASCBC Cross Brace Clip
		

USG DONN® BRAND  
 ADVANCESPAN™  
 MAIN TEE DETAILS

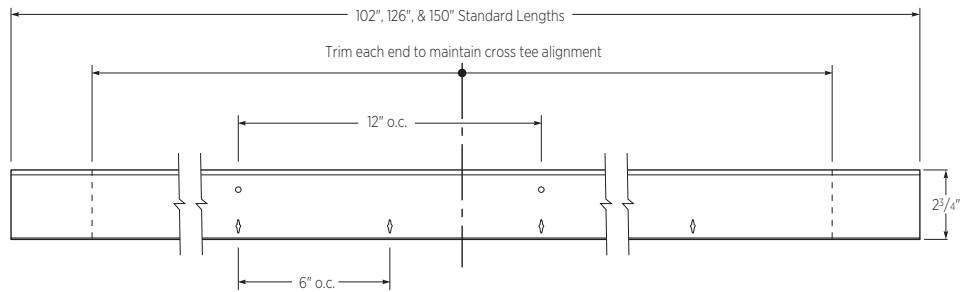

PHYSICAL DATA/  
 FOOTNOTES

**Product literature and samples**  
 Data sheet: AC3324  
 Installation guide: AC3325  
 USG DXAS™ sample: 259499  
 USG DXTAS™ sample: 259500

**Material**  
 Min. G30 hot-dipped galvanized steel body and cap. Baked-on polyester paint.

**Online tools**  
 usgdesignstudio.com or cgcdesignstudio.com

**Compliance**  
 Third-party tested by Progressive Engineering Inc. in accordance with ASTM C635 (modified). Full-scale seismic testing conducted by University of California, Berkeley, Pacific Earthquake Engineering Research Center. Local building codes may vary; check with code official for compliance prior to installing.

**Limitations**  
 Interior applications only.

**Seismic Compliance**  
 AdvanceSpan™ is OSHPD/HCAI pre-approved per OPM-0462.

**ICC Evaluation Service, LLC Report Compliance**  
 For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-5136 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

**Notice**  
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3324/rev. 10-23  
 © 2023 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Manufactured by  
 USG Interiors, LLC  
 550 West Adams Street  
 Chicago, IL 60661

The trademarks USG, CGC, ADVANCESPAN, CENTRICITEE, DONN, DX, DXAS, DXT, DXTAS, ECOBLUEPRINT, MARS, IT'S YOUR WORLD, BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

