

USG DONN® BRAND FINELINE® 1/8 DXFF™ ACOUSTICAL SUSPENSION SYSTEM


USG Donn® Brand Fineline®
1/8" DXFF™ Acoustical Suspension
System/USG Eclipse™ Acoustical
Panels with ClimaPlus™ Performance

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

STANDARD COLORS²




ADVANTAGE COLORS²

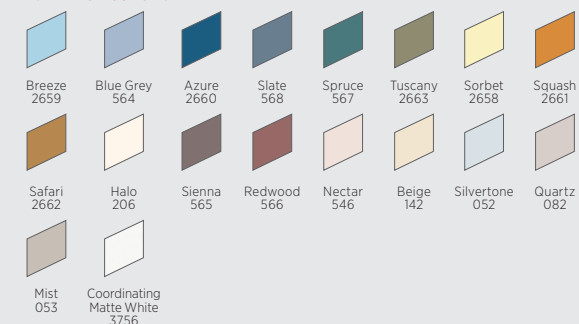


PREMIUM COLORS




POWDER-COATED FINISH



PROFILE



EDGE DETAIL



FEATURES AND BENEFITS

- Narrow-profile, slotted grid system with 1/8" reveal provides streamlined appearance.
- Reveal accommodates partition attachments and pendant-mounted light fixtures.
- Mitered intersections offer a clean, tailored appearance.
- Complies with all national code requirements.
- Optional integrated air diffuser.
- Custom colors available.
- ICC-ES evaluated for seismic installations (ESR-1222).
- Standard components available in Imperial and Metric sizes.
- USG Donn® Brand Fineline® 1/8 DXFF Acoustical Suspension System is part of the Ecoblueprint™ portfolio — meeting today's sustainability standards. For sustainability documentation go to USG.com or CGCInc.com.

APPLICATIONS

- All interior general-use areas

USG DONN® BRAND FINELINE® 1/8 DXFF™ ACOUSTICAL SUSPENSION SYSTEM

ORDER SAMPLES/LITERATURE
USG: usg.com or samplitt@usg.com
CGC: contact Sales Representative


TECHNICAL SERVICES
800.USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com




Declare® Labels on select finishes, see usg.com for more details and documentation.

9/16" TEE SYSTEM⁷ Main Tee³



Cross Tee



MOLDING⁷



PHYSICAL DATA/ FOOTNOTES

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3033/rev. 2-23
© 2023 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

ASTM Class	Length	Height	Item No.	Fire Rating	Seismic Design Category		Rated Load ¹			
					IBC	ICC-ES Evaluated Installation	4' Hanger Spacing	5' Hanger Spacing	6' Hanger Spacing	
Intermediate Duty	10'	1-25/32" 45 mm	DXFF2930 	Class A 	A-C		7/8" Molding ACM7 Clip	12 lb./LF	6.5 lb./LF	3.6 lb./LF
	12'	1-25/32" 45 mm	DXFF2924 DXFF2948 				7/8" Molding ACM7 Clip	12 lb./LF	6.5 lb./LF	3.6 lb./LF
	3600 mm	45 mm	MEDXFF3600 				22 mm (7/8") Molding ACM7 Clip	12 lb./LF	6.5 lb./LF	3.6 lb./LF
Heavy Duty	12'	1-25/32" 42 mm	DXFFH2924 	Class A	A-F		7/8" Molding ACM7 Clip	16 lb./LF	8.3 lb./LF	4.9 lb./LF
	3600 mm	45 mm	MEDXFFH3600 				22 mm (7/8") Molding ACM7 Clip	16 lb./LF	8.3 lb./LF	4.9 lb./LF
	1'	1-25/32"	DXFF129 	Class A						
	2'	1-25/32"	DXFF229 							
	30"	1-25/32"	DXFF30 							
	4'	1-25/32"	DXFF429 DXFF429N ⁴ DXFF429S ⁵ 							
	5'	1-25/32"	DXFF529 DXFF529N ⁴ 							
	1200 mm	45 mm	MEDXFF1200 MEDXFF1200N ⁴ MEDXFF1200S ⁵ 							
	600 mm	45 mm	MEDXFF600 							

Low Emissions (VOC)
CDPH 01350 v1.2-2017 compliance on select finishes, see usg.com for more details and documentation.

High Recycled Content
USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Wall Angle	Length	Item No.	Wall Angle	Length	Item No.
	12' 3600 mm	M9 	Shadowline 	12' 3600 mm	MS174
	12' 3600 mm	M7 			

Product literature and samples
Data sheet: AC3033
Sample: 270308

Material
Min. G30 hot-dipped galvanized steel tee. Baked-on polyester paint.

Installation
Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

ICC Evaluation Service, LLC Report Compliance
For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to usg.com for most current version.

ASTM Load Compliance
Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

Air diffusers
Request AC272.

Notes

- Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.
- Custom color available.
- Cross-tee notches available in 24" and 30" modules. Standard is 24" o.c.
- N = Notch at midpoint.
- Midpoint notch on one side only to accommodate light fixtures.
- Panels must be field-cut to size at the perimeter.
- Metric sizes listed available with standard lead times. Other metric sizes available by RTQ.

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CLIMAPLUS, DONN, DXFF, ECLIPSE, ECOBLUEPRINT, FINELINE, IT'S YOUR WORLD, BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

