

USG DONN® BRAND TRANSITION MOLDING

DRYWALL TO ACOUSTICAL CEILING TRANSITION MOLDING



USG Donn® Brand DXT™ Transition Molding with USG Mars™ Acoustical Panels/USG Donn® Brand Fineline® DXF™ Acoustical Suspension System


TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

USG DONN® BRAND TRANSITION MOLDING COLOR



Flat White
050

PROFILE

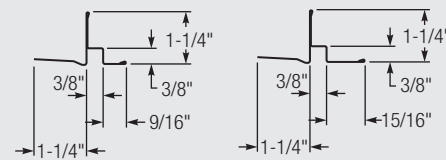

FEATURES AND BENEFITS

- Roll-formed, hot-dipped galvanized steel trims for creating transitions between drywall and acoustical ceilings.
- One-piece acoustical wall molding with an integrated drywall taping flange.
- Eliminates the need to construct drywall fascias for wall molding attachment.
- Taping flange is knurled and perforated to accept joint compound.
- Factory painted to match USG Donn® Brand acoustical suspension systems.
- Compatible with all USG Donn® Brand and USG Drywall suspension systems.

APPLICATIONS

- Contemporary offices
- Entertainment
- Hospitality
- Healthcare
- Retail
- Education

USG DONN® BRAND TRANSITION MOLDING

DRYWALL TO ACOUSTICAL CEILING TRANSITION MOLDING

ORDER SAMPLES/LITERATURE
 USG: usg.com or samplitt@usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
 usgdesignstudio.com
 cgcdesignstudio.com

COMPONENTS


USG Donn® Brand SL DXT™

Profile	Item Number	Exposed Leg	Reveal	Length	Pieces/Carton	LF/Carton
	CPDWA9120	9/16"	3/8"x 3/8"	120"	12	120
	CPDWA15120	15/16"	3/8"x 3/8"	120"	12	120

USG Donn® Brand SL DX®

INSTALLATION DETAILS

Shadowline USG Donn® Brand Transition Molding, Drywall to Acoustical Assembly Elevation

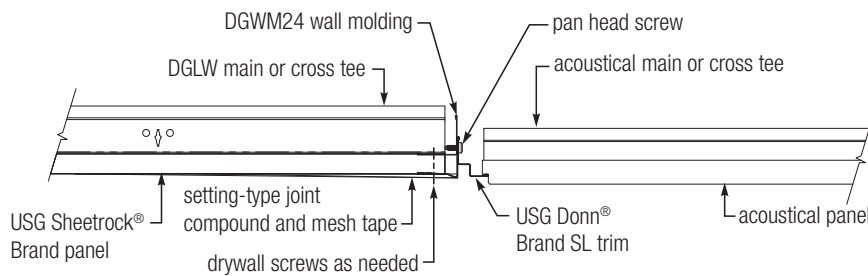

Low Emissions (VOC)

CDPH 01350 v1.2-2017 compliance on select finishes, see usg.com for more details and documentation.

RECOMMENDED FINISHING INSTRUCTIONS

1. Embed mesh tape over flange with setting-type joint compound.
2. Apply second coat of setting-type or ready-mixed joint compound.
3. Apply third coat if needed.

Note:

For complete installation instructions, refer to installation guide AC3318.

PHYSICAL DATA/ FOOTNOTES

Product literature and samples
 Data sheet: AC3315
 Installation guide: AC3318
 Sample: 259401

Online tools
 usgdesignstudio.com or cgcdesignstudio.com

Material
 Min. G30 hot-dipped galvanized steel.
 Baked-on polyester paint.

Note
 For availability in Canada, please contact your local sales representative.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3315/rev. 6-22
 © 2022 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, DONN, DX, DXF, DXT, FINELINE, MARS, SHEETROCK, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

