

USG COMPÄSSO™ ELITE FOR USG ENSEMBLE® ACOUSTICAL DRYWALL CEILING SYSTEM

EXTRUDED PERIMETER TRIMS - STRAIGHT



USG Compasso™ Elite for Drywall
with USG Sheetrock® Brand
Ensemble® Four-Sided Panels

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

USG COMPÄSSO™ ELITE FOR DRYWALL COLORS



Primer White


FEATURES AND BENEFITS

- USG Compasso™ Elite for Drywall is an extruded aluminum trim for creating drywall ceiling fascias on USG Ensemble® Ceiling Systems.
- Easier to install than conventional drywall fascias.
- Available in 2-1/2", 4", 6" and 8" trim heights.
- Can be ordered in standard 10' lengths or custom engineered curves.
- Integrated taping flange for a clean, finished edge.
- Designed to integrate with 5/8" USG Sheetrock® Brand Ensemble® Four-Sided Taper™ Panels.
- Works with USG Compasso™ Elite splice plates.
- Primer White must be field painted or sprayed with the USG Ensemble™ Spray Applied Finish to achieve desired look.

APPLICATIONS

- Interior Applications
- Pods, Islands, and Clouds
- Sloped Ceilings
- Custom Curved Radius and Length
- Quick Ship Straights
- New Construction

Perspective

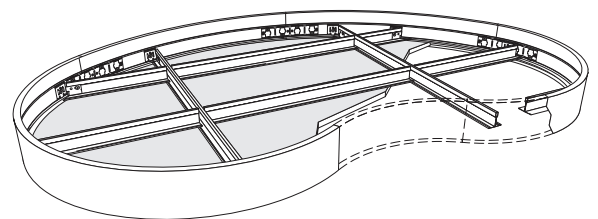

USG COMPASSO™ ELITE FOR USG ENSEMBLE® ACOUSTICAL DRYWALL CEILING SYSTEM

EXTRUDED PERIMETER TRIMS - STRAIGHT

ORDER SAMPLES/LITERATURE
USG: usg.com or samplitt@usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800.USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com


COMPONENTS

Trim Profiles

Item #

		Materials		Length	Finish
		Extruded aluminum alloy		10'	Factory-applied, baked-on polyester conversion coat
2-1/2"	4"	6"	8"	Factory-Welded Corners	
CPALDWJT2510	CPALDWJT410	CPALDWJT610	CPALDWJT810		

USG COMPASSO™ ELITE DRYWALL TRIM INSTALLATION FOR USG ENSEMBLE® CEILING SYSTEM

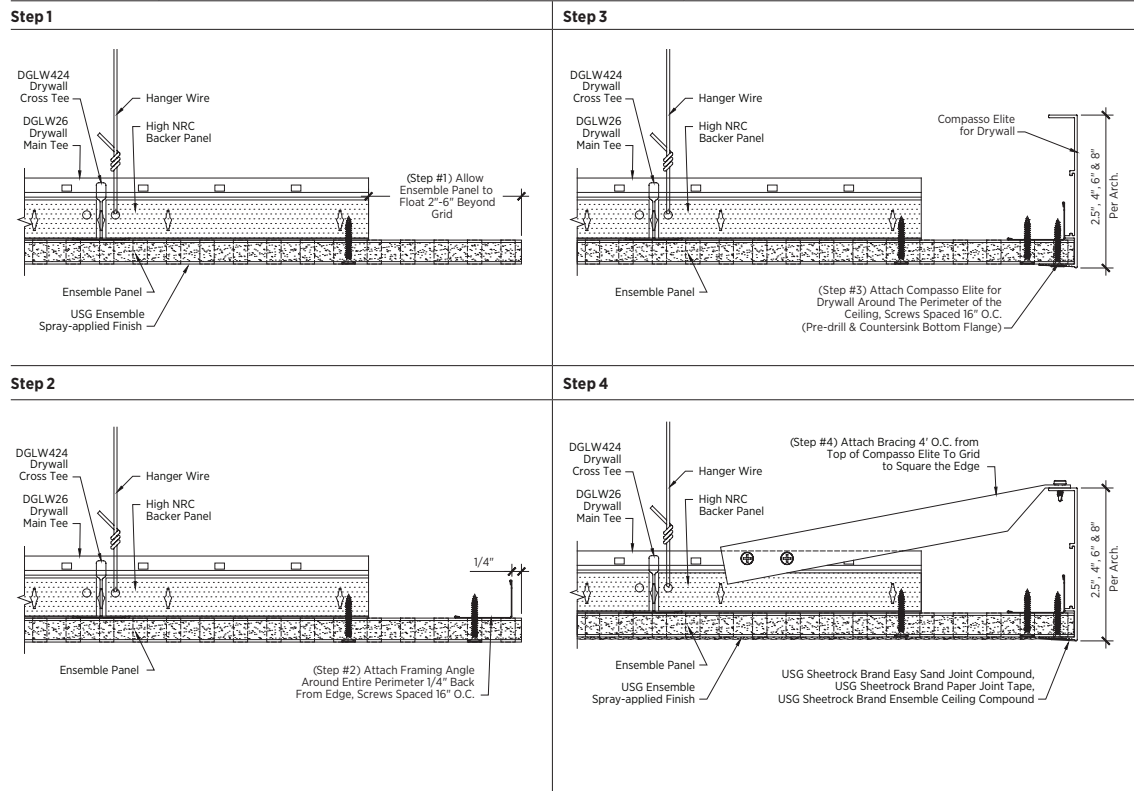

FINISHING RECOMMENDATIONS

1. Apply the bed and tape coat using USG Sheetrock Brand Easy Sand Joint Compound and USG Sheetrock Brand Paper Joint Tape.
2. Apply the fill coat using USG Sheetrock® Brand Easy Sand™ Joint Compound or USG Sheetrock® Brand Ensemble™ Ceiling Compound.
3. Apply the finish coat using USG Sheetrock® Brand Ensemble™ Ceiling Compound.

Note

Use USG Compasso™ Elite splice plates for joining pieces together.

Product literature

Data sheet: AC290391 and AC3317
Installation guide: IC624
Warranty: SC2102
Care and Maintenance Instructions: IC518
Trim Systems Design Guide

Online tools

usgdesignstudio.com or cgcdesignstudio.com

Recycled content

For details, see the LEED report tool at
usgdesignstudio.com or cgcdesignstudio.com

Material

Extruded aluminum alloy

Notice

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

PHYSICAL DATA

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC290391/rev. 1-22

© 2022 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, COMPASSO, ENSEMBLE, EASY SAND, SHEETROCK, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

