


USG GEOMETRIX® 3-DIMENSIONAL METAL PANELS

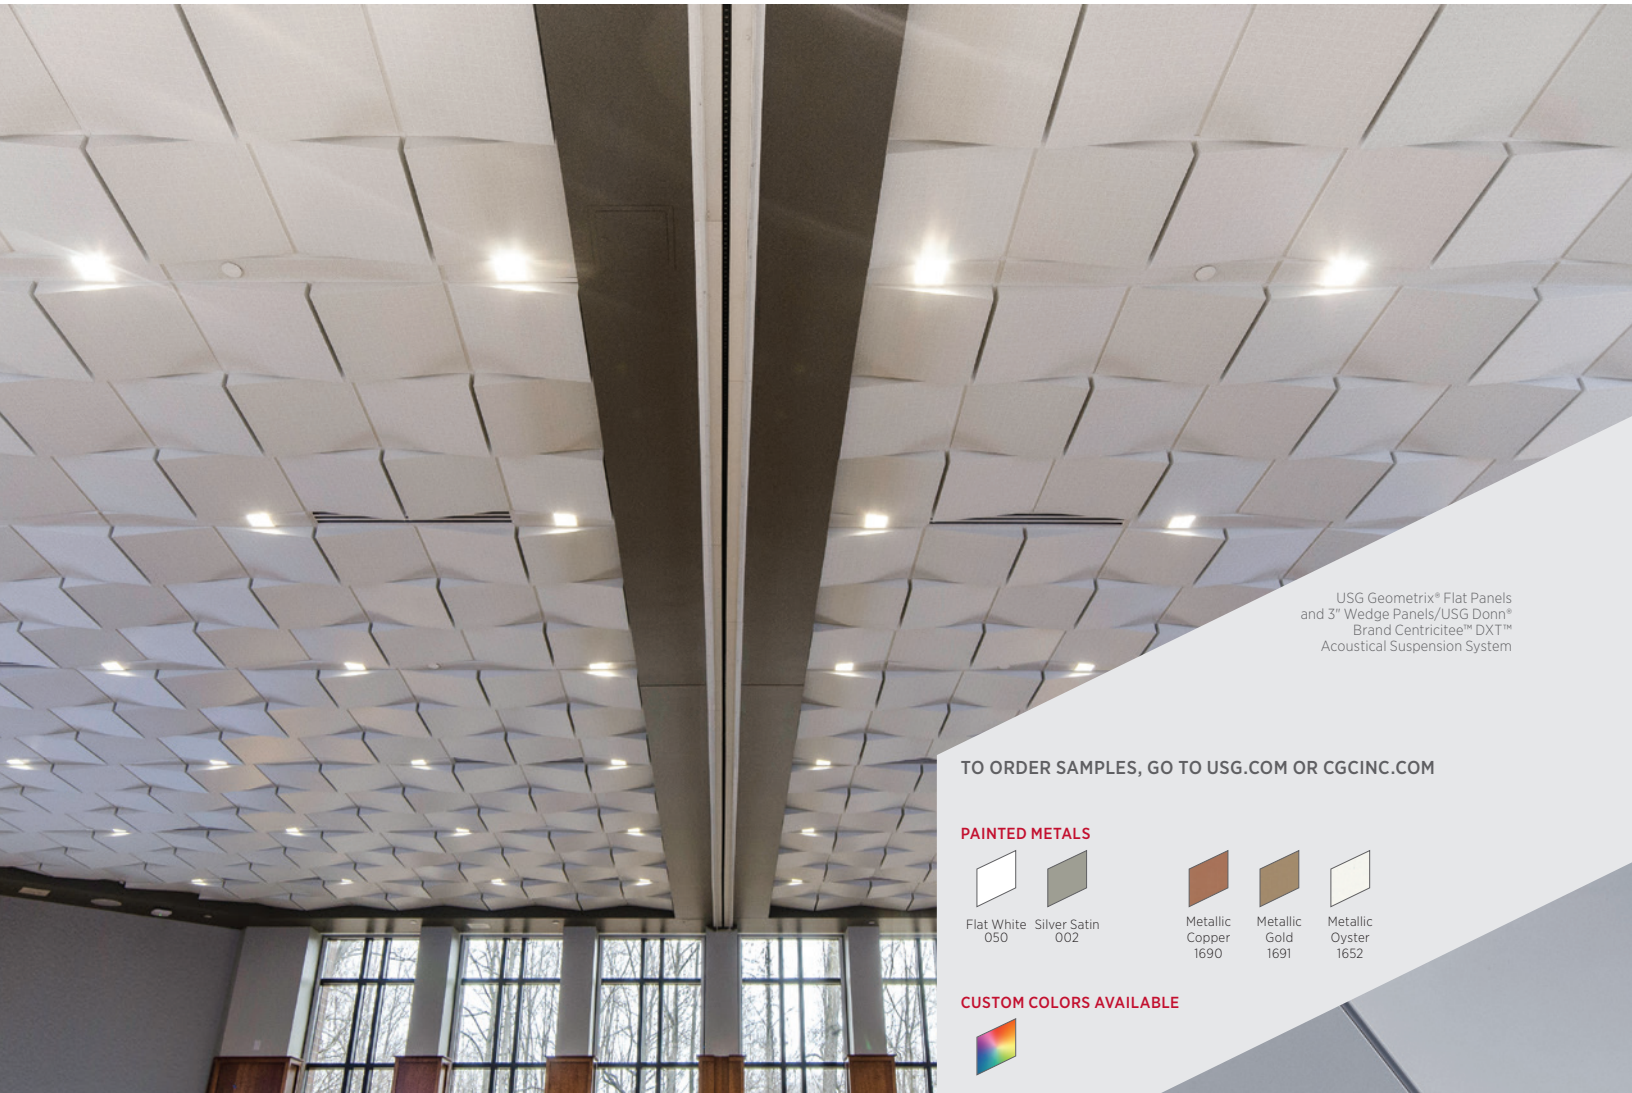

USG Geometrix® Flat Panels
and 3" Wedge Panels/USG Donn®
Brand Centricitee™ DXT™
Acoustical Suspension System


TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

PAINTED METALS



Flat White
050

Silver Satin
002



Metallic
Copper
1690

Metallic
Gold
1691

Metallic
Oyster
1652

CUSTOM COLORS AVAILABLE



FEATURES AND BENEFITS

- Multiple profiles and depths lend new dimension to ceiling design.
- Panel depths of 1", 2" and 3" allow a spectrum of possibilities, from subtle textures to bold rhythms.
- 2'x2' lay-in panels are compatible with 9/16" and 15/16" USG Donn® Brand suspension systems.
- Solid or perforated panels.
- Available in Flat White, Silver Satin and custom colors for design versatility.

APPLICATIONS

- All commercial applications
- Interior Applications
- Pods, Islands, and Clouds
- Wall to Wall Ceilings
- Patterned Aesthetics
- New Construction or Renovation

USG GEOMETRIX® 3-DIMENSIONAL METAL PANELS

ORDER SAMPLES/LITERATURE
 USG: usg.com or samplitt@usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800.USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
 usgdesignstudio.com
 cgcdesignstudio.com



PRODUCT INFORMATION

ACOUSTICS³

Materials	Size and Weight	Finishes
Panels: Aluminum	Panels 2'x2' Panel weight (for 3" deep flat panel): 0.75 lb./sq. ft.	Panels are available in smooth metal or perforated. A black Acoustibond™ backer is included on all perforated panels unless otherwise specified. Acoustibond backer is also available in white.
Description	Optional Acoustical Material	Sound Rating - NRC
Perforated CD06305 (A062A)	Acoustibond™ backer	0.60
Perforated CD06305 (A062A)	2", 0.75 lb. fiberglass in polybag	0.85

PANELS

Configurations


Flat ^{1,2}	Wedge ¹	Outside Wedge Corner	Inside Wedge Corner

Depths

EDGE DETAILS

USG Geometrix® Panels with 15/16" USG DX® Suspension	USG Geometrix® Panels with 9/16" USG Centricitee™ DXT™ Suspension	USG Geometrix® Panels with 9/16" USG Finline® DXF™ Suspension	USG Geometrix® Panels with 9/16" USG Finline® 1/8 DXFF™ Suspension

ASSEMBLY

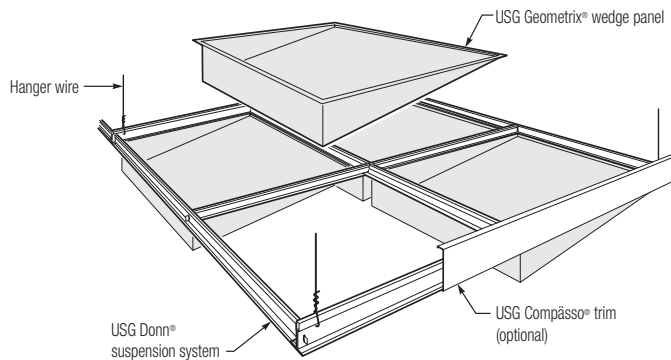

PHYSICAL DATA

Low Emissions (VOC)
 CDPH 01350 v1.2-2017 compliance on select finishes, see usg.com for more details and documentation.

High Recycled Content
 USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

Product literature
 System brochure: IC437
 Data sheet: IC424
 Warranty: SC2102
 Installation Guides: IC518
 Perforation Guide: IC425
 Cleaning Instructions: IC518

Online tools
 usgdesignstudio.com or cgcdesignstudio.com

ASTM E84 and CAN/ULC S102 surface-burning characteristics (with Acoustibond™ backer)
 Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

Limitation
 Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to Metal Ceilings Technical Guidelines published by the Ceilings & Interior Systems Construction Association.

Recycled content
 USG Geometrix® aluminum panels: ≤ 90% recycled content.

- Notes**
1. Available pre-engineered utility circles accommodate lighting and utilities.
 2. Also available with 5/16" depth.
 3. Refer to IC425 for additional NRC information based on perforation pattern.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC424/rev. 6-22
 © 2022 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Manufactured by
 USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, ACOUSTIBOND, CENTRICITEE, COMPASSO, DONN, DX, DXF, DXFF, DXL, DXT, FINELINE, GEOMETRIX, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

