


# USG GEOMETRIX® 3-DIMENSIONAL METAL PANELS

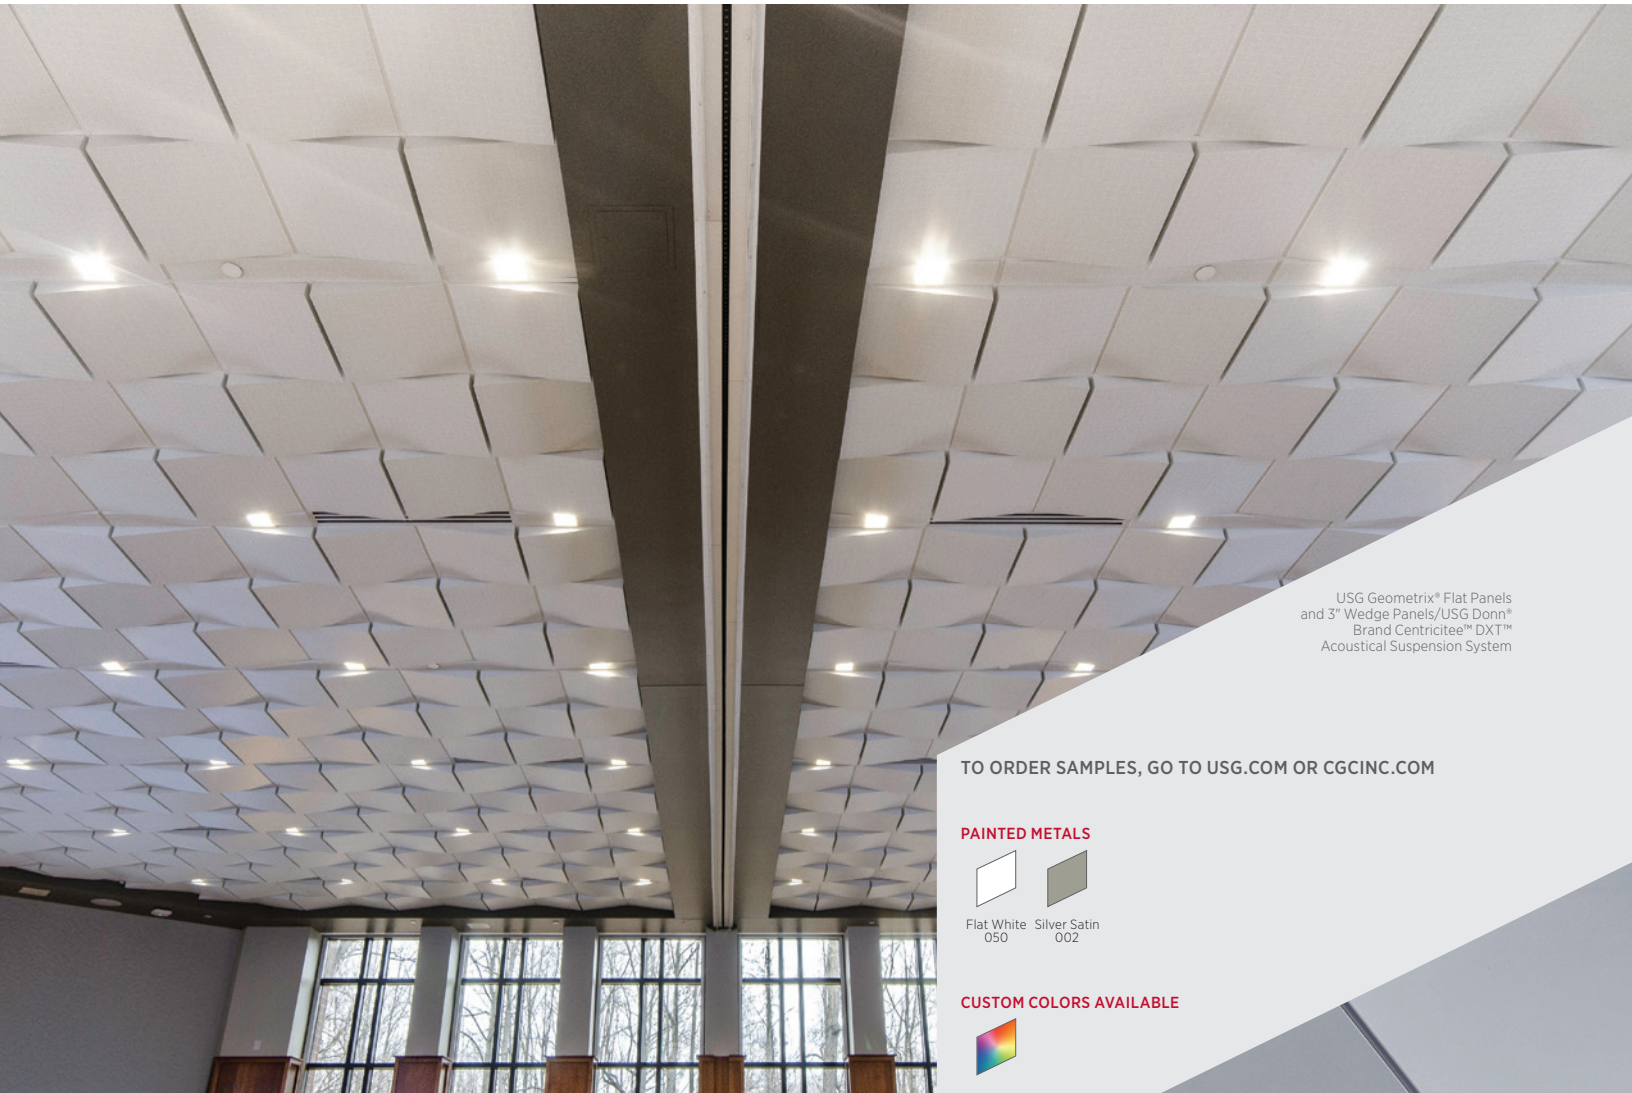

USG Geometrix® Flat Panels  
and 3" Wedge Panels/USG Donn®  
Brand Centricitee™ DXT™  
Acoustical Suspension System

TO ORDER SAMPLES, GO TO [USG.COM](http://USG.COM) OR [CGCINC.COM](http://CGCINC.COM)

## PAINTED METALS



Flat White 050    Silver Satin 002

## CUSTOM COLORS AVAILABLE



## FEATURES AND BENEFITS

- Multiple profiles and depths lend new dimension to ceiling design.
- Panel depths of 1", 2" and 3" allow a spectrum of possibilities, from subtle textures to bold rhythms.
- 2'x2' lay-in panels are compatible with 9/16" and 15/16" USG Donn® Brand suspension systems.
- Solid or perforated panels.
- Available in Flat White, Silver Satin and custom colors for design versatility.

## APPLICATIONS

- All commercial applications
- Interior Applications
- Pods, Islands, and Clouds
- Wall to Wall Ceilings
- Patterned Aesthetics
- New Construction or Renovation

USG GEOMETRIX® 3-DIMENSIONAL  
METAL PANELS

ORDER SAMPLES/LITERATURE  
USG: usg.com or samplitt@usg.com  
CGC: contact Sales Representative

FOR MOST UP-TO-DATE  
TECHNICAL INFORMATION  
AND LEED REPORT TOOL  
usgdesignstudio.com  
cgcdesignstudio.com  
usg.ecomedes.com

TECHNICAL SERVICES  
800.USG.4YOU (874-4968)



PRODUCT INFORMATION

ACOUSTICS<sup>3</sup>

| Materials                               | Size and Weight                                                         | Finishes                                                                                                                                                                                        |
|-----------------------------------------|-------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Panels: Aluminum                        | Panels 2'x2'<br>Panel weight (for 3" deep flat panel): 0.75 lb./sq. ft. | Panels are available in smooth metal or perforated. A black Acoustibond™ backer is included on all perforated panels unless otherwise specified. Acoustibond backer is also available in white. |
| Description                             | Optional Acoustical Material                                            | Sound Rating - NRC                                                                                                                                                                              |
| Perforated CD06305 (A062A) <sup>4</sup> | Acoustibond™ backer                                                     | 0.60                                                                                                                                                                                            |
| Perforated CD06305 (A062A) <sup>4</sup> | 2", 0.75 lb. fiberglass in polybag                                      | 0.85                                                                                                                                                                                            |

PANELS  
Configurations

| Flat <sup>1,2</sup> | Wedge <sup>1</sup> | Outside Wedge Corner | Inside Wedge Corner |
|---------------------|--------------------|----------------------|---------------------|
|                     |                    |                      |                     |


Depths

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |

EDGE DETAILS

| USG Geometrix® Panels with 15/16" USG DX® Suspension | USG Geometrix® Panels with 9/16" USG Centricitee™ DXT™ Suspension | USG Geometrix® Panels with 9/16" USG Finline® DXF™ Suspension | USG Geometrix® Panels with 9/16" USG Finline® 1/8 DXFF™ Suspension |
|------------------------------------------------------|-------------------------------------------------------------------|---------------------------------------------------------------|--------------------------------------------------------------------|
|                                                      |                                                                   |                                                               |                                                                    |

ASSEMBLY

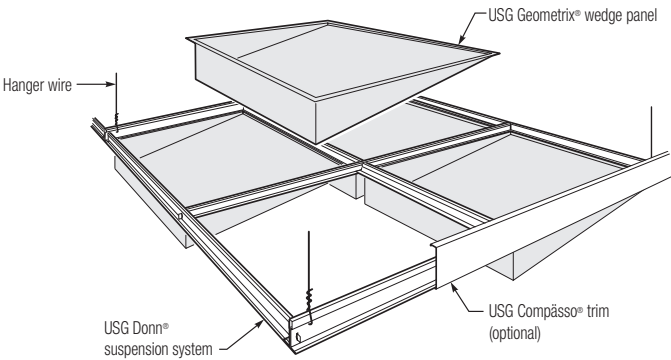

PHYSICAL DATA

**Notice**  
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC424/rev. 7-24  
© 2024 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

**Low Emissions (VOC)**  
CDPH 01350 v1.2-2017 compliance on select finishes, see usg.ecomedes.com for more details and documentation.

**Additional Documents and Resources**  
System Brochure: IC437  
Data Sheet: IC424  
Warranty: SC2102  
Installation Guides: IC518  
Perforation Guide: IC425  
Cleaning Instructions: IC518

**Online Tools**  
usgdesignstudio.com, cgcdesignstudio.com or usg.ecomedes.com

**Fire Classification**  
ASTM E84 and CAN/ULC S102 surface-burning characteristics (with Acoustibond™ backer)  
Class A  
Flame spread: 25 or less  
Smoke developed: 50 or less

Manufactured by  
USG Interiors, LLC  
550 West Adams Street  
Chicago, IL 60661

The trademarks USG, CGC, ACOUSTIBOND, CENTRICITEE, COMPASSO, DONN, DX, DXF, DXFL, DXT, FINELINE, GEOMETRIX, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

**High Recycled Content**  
USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of pre-consumer (post-industrial) and post-consumer recycled content per FTC guidelines.

**Limitation**  
Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to Metal Ceilings Technical Guidelines published by the Ceilings & Interior Systems Construction Association.

**Recycled Content**  
USG Geometrix® aluminum panels: up to 90% recycled content.

- Notes**
1. Available pre-engineered utility circles accommodate lighting and utilities.
  2. Also available with 5/16" depth.
  3. Refer to IC425 for additional NRC information based on perforation pattern.
  4. Perforation pattern CD06305 (A062A) is only recommended for Flat Geometrix panels.

