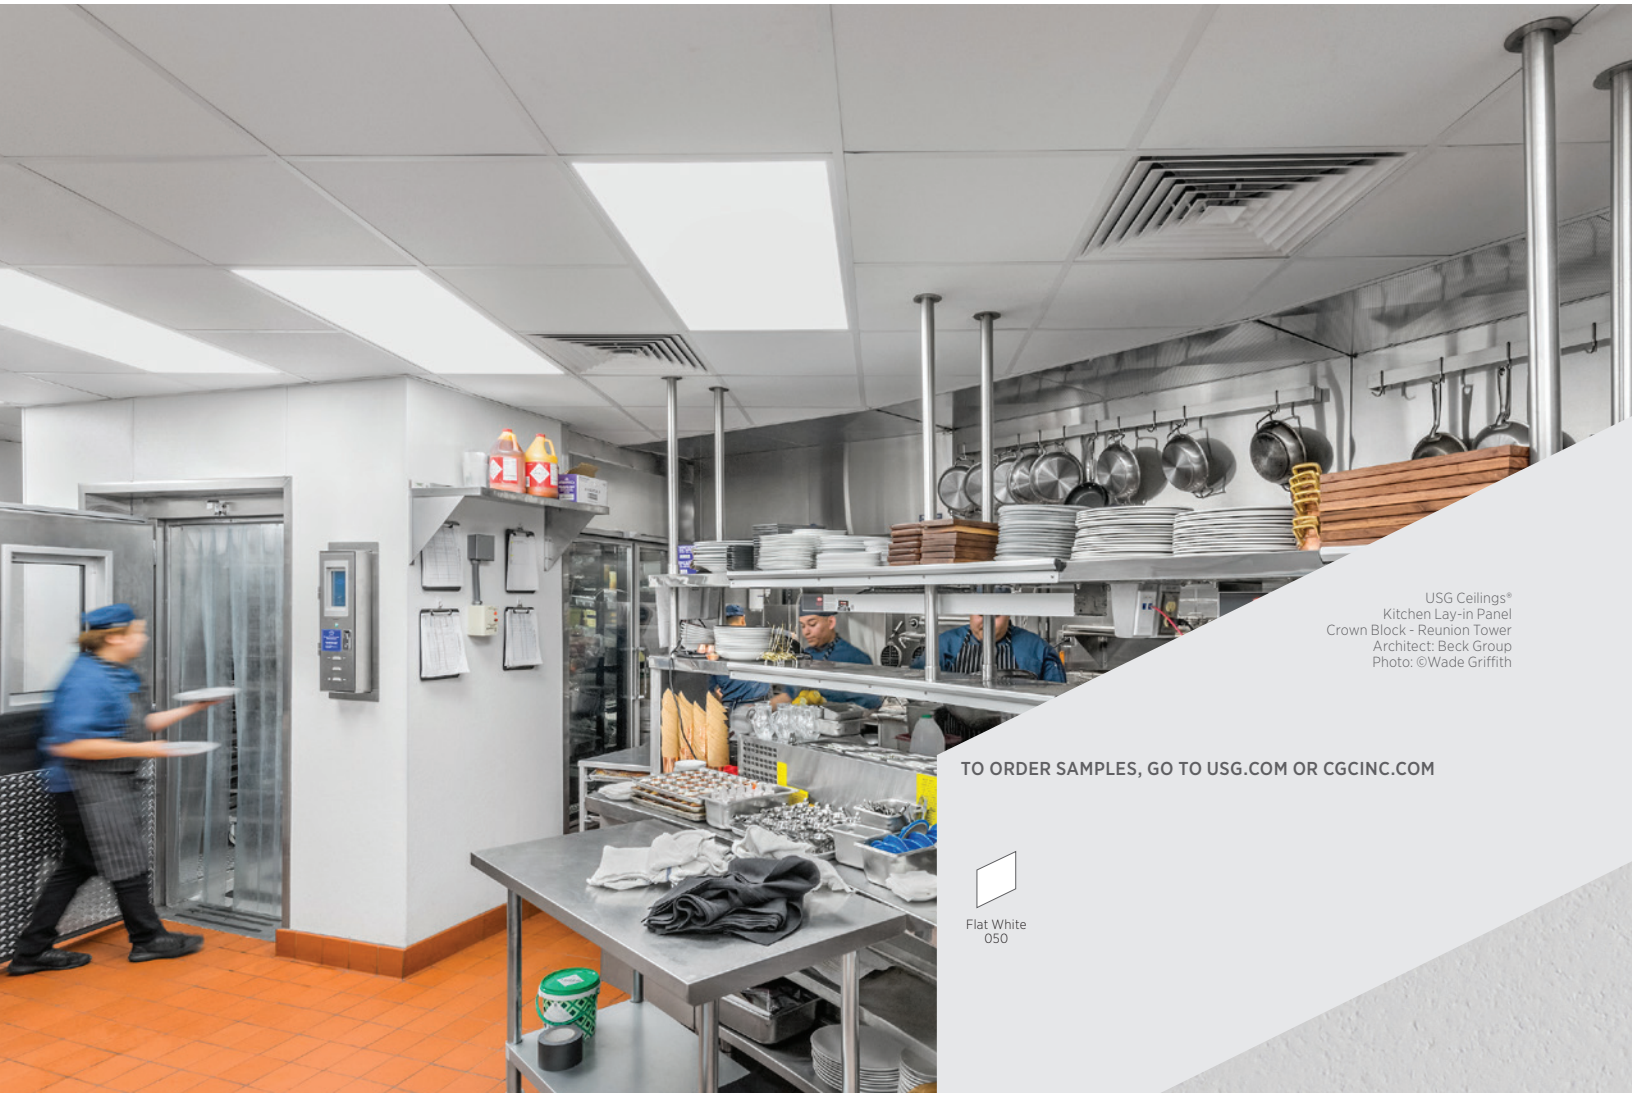# USG CEILINGS® KITCHEN LAY-IN PANEL

CLIMAPLUS™ PERFORMANCE

USG Ceilings®
Kitchen Lay-in Panel
Crown Block - Reunion Tower
Architect: Beck Group
Photo: ©Wade Griffith

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

Flat White
050

Smooth-Textured Panel

FEATURES AND BENEFITS

- Lightweight alternative to vinyl-covered gypsum.
- Meets USDA/FSIS guidelines for use in food-processing areas.
- High light reflectance.
- Washable, water repellent, scratch and soil resistant finish.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.

APPLICATIONS

- Kitchens and Food Preparation Areas
- Restrooms and Utility Areas
- Locker Rooms

SUBSTRATE

- Wet-formed Mineral Fiber

USG CGC

IT'S YOUR WORLD. BUILD IT.®

USG CEILINGS® KITCHEN LAY-IN PANEL

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
USG: usg.com or samplit@usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com
usg.ecomedes.com

30 YEAR LIMITED SYSTEM WARRANTY
- No Visible Sag
- Mold/Mildew Protection

UL Classified

USG CEILINGS® KITCHEN LAY-IN PANEL[2]

Edge	Panel Size	Fire Rating	Item No.	NRC[4]	CAC Min.	LR[3]	Color	Grid Options	Anti-Mold & Mildew/Sag Resistance	Recycled Content[1]	Panel Cost
SQ	2'x2'x5/8"	Class A	**3210**	–	35	0.90	White	A,B,C	◆	35%	$
	2'x4'x5/8"	Class A	**3410**	–	35	0.90	White	A,B,C	◆	35%	$

ClimaPlus™ Warranty Performance[5]
Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

GRID PROFILE OPTIONS

A
USG DX®

B
USG DXLA™

C
USG ZXLA™

PHYSICAL DATA

Product literature
Data sheet: SC3226

ASTM E1264 classification
ASTM E1264-22 Type IX, Form 2, Pattern G
ASTM E1264-23 Type A, Form A3.2, Pattern G

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

Weight
0.60 lb./sq. ft.

Online tools
usgdesignstudio.com, cgcdesignstudio.com
or usg.ecomedes.com

Thermal resistance
R-1.4

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Can be cleaned easily with a damp sponge. Use mild detergent and water—do not use acetate, ammonia or high concentration of chlorine, bromide or other harsh chemicals.

Notes
1. For details, see USG Sustainability tool at usgdesignstudio.com or cgcdesignstudio.com.
2. Do not use this product in close proximity to grease ducts.
3. LR values are shown as averages.
4. USG does not consider a ceiling panel to be acoustically rated if NRC is less than 0.50.
5. For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Manufactured by
United States Gypsum Company
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CLIMAPLUS, DX, DXLA, ZXLA, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

USG ◆ CGC