
USG MARS™ HIGH-NRC/HIGH-CAC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER®

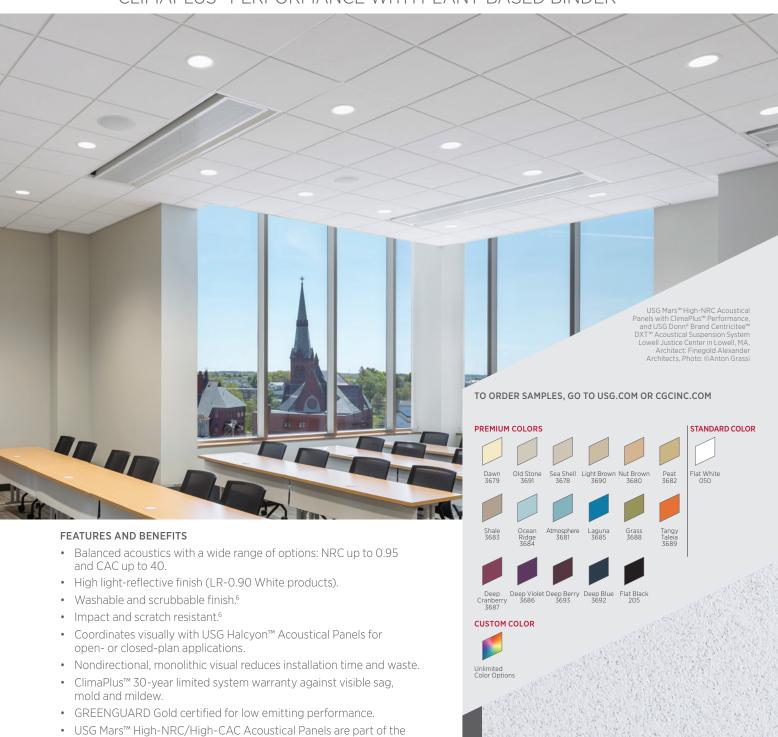

APPLICATIONS

- Offices
- Healthcare
- Classrooms and Corridors
- Reception Areas and Lobbies
- Department Stores and Retail
- Restaurants and Hospitality

SUBSTRATE

 ${\sf Ecoblueprint}^{\scriptscriptstyle\mathsf{TM}}\,\mathsf{portfolio}-\mathsf{meeting}\;\mathsf{today's}\;\mathsf{sustainability}\;\mathsf{standards}.$

For sustainability documentation go to USG.com or CGCInc.com.

· Wet-formed Mineral Fiber

-ine-Textured Panel



USG MARS" HIGH-NRC/HIGH-CAC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER9







(II) ...







ECOBLUEPRINT.

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

ORDER SAMPLES/LITERATURE

USG: usg.com or samplit@usg.com CGC: contact Sales Representative

usgdesignstudio.com
cgcdesignstudio.com
usg.ecomedes.com

FOR MOST UP-TO-DATE

AND LEED REPORT TOOL

USG MARS™ HIGH-NRC PANELS

Plant-Based Binder

95/30

USG MARS™ HIGH-NRC PANELS 90/30

Plant-Based Binder

USG MARS™ HIGH-NRC PANELS 85/35

Plant-Based Binder

				ણિ UL Classifi	ed⁵							
Edge	Panel Size	Fire Rating	Item No.	NRC ¹⁰	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC	Ø		Ħ	1	0	3	\$
SQ	2'x2'x1.3"	Class A	88280	0.95	30	0.90	White	A, B, C	Low		21%	\$\$\$
	2'x4'x1.3"	Class A	88281	0.95	30	0.90	White	Α,Β	Low		21%	\$\$\$
	30"x30"x1.3"	Class A	88282	0.95	30	0.90	White	A, B	Low		21%	\$\$\$
SL	2'x2'x1.3"	Class A	88285	0.95	30	0.90	White	1	Low		21%	\$\$\$
	2'x4'x1.3"	Class A	88286	0.95	30	0.90	White	1	Low		21%	\$\$\$
	30"x30"x1.3"	Class A	88287	0.95	30	0.90	White	1	Low		21%	\$\$\$
FL	2'x2'x1.3"	Class A	88290	0.95	30	0.90	White	J, K, L, M	Low		21%	\$\$\$
	2'x4'x1.3"	Class A	88291	0.95	30	0.90	White	J, K, L, M	Low		21%	\$\$\$
	30"x30"x1.3"	Class A	88292	0.95	30	0.90	White	J, K, L, M	Low		21%	\$\$\$
SQ	2'x2'x1"	Class A	88137	0.90	30	0.90	White, color ⁷	A,B,C	Low		71%	\$\$\$
	2'x4'x1"	Class A	89137	0.90	30	0.90	White	A,B	Low		71%	\$\$\$
	30"x30"x1"	Class A	80213	0.90	30	0.90	White	A,B	Low		71%	\$\$\$
	30"x60"x1"	Class A	89143	0.90	30	0.90	White	A,B	Low		71%	\$\$\$
SLT	2'x2'x1"	Class A	88138	0.90	30	0.90	White, color ⁷	D	Low		71%	\$\$\$
	2'x4'x1"	Class A	89138	0.90	30	0.90	White	D	Low		71%	\$\$\$
	30"x30"x1"	Class A	80239	0.90	30	0.90	White	D	Low		71%	\$\$\$
	30"x60"x1"	Class A	89144	0.90	30	0.90	White	D	Low		71%	\$\$\$
FLB	2'x2'x1"	Class A	88139	0.90	30	0.90	White, color ⁷	E,F,G,H	Low		71%	\$\$\$
	2'x4'x1"	Class A	89139	0.90	30	0.90	White	E,F,G,H	Low		71%	\$\$\$
	30"x30"x1"	Class A	80265	0.90	30	0.90	White	E,F,G,H	Low		71%	\$\$\$
	30"x60"x1"	Class A	89145	0.90	30	0.90	White	E,F,G,H	Low		71%	\$\$\$
SQ	2'x2'x7/8"	Class A	88134	0.85	35	0.90	White, color ⁷	A,B,C	Low		72%	\$\$\$
	2'x4'x7/8"	Class A	89134	0.85	35	0.90	White	A,B	Low		72%	\$\$\$
	30"x30"x7/8"	Class A	80113	0.85	35	0.90	White	A,B	Low		72%	\$\$\$
	30"x60"x7/8"	Class A	89140	0.85	35	0.90	White	A,B	Low		72%	\$\$\$

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.ecomedes.com and at spot.ul.com.

ClimaPlus™ Warranty Performance³

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of pre-consumer (post-industrial) and post-consumer recycled content per FTC guidelines.



USG MARS" HIGH-NRC/HIGH-CAC ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER9











JISTOM PLOOR

TECHNICAL SERVICES 800 USG.4YOU (874-4968) usg cgc usg

ECOBLUEPRINT.

ORDER SAMPLES/LITERATURE

USG: usg.com or samplit@usg.com CGC: contact Sales Representative

usgdesignstudio.com
cgcdesignstudio.com
usg.ecomedes.com

FOR MOST UP-TO-DATE

TECHNICAL INFORMATION AND LEED REPORT TOOL

UL 2818

USG MARS™ HIGH-NRC PANELS 85/35

Plant-Based Binder

USG MARS™ HIGH-NRC/ HIGH-CAC PANELS 80/40

Plant-Based Binder

USG MARS™ HIGH-NRC PANELS 80/35

Plant-Based Binder

				U UL Classif	ied							
Edge	Panel Size	Fire Rating	Item No.	NRC ¹⁰	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
				NRC	CAC	Ø		ø	Ø		3	\$
SLT	2'x2'x7/8"	Class A	88135	0.85	35	0.90	White,	D	Low		74%	\$\$\$
	2'x4'x7/8"	Class A	89135	0.85	35	0.90	White	D	Low		74%	\$\$\$
	30"x30"x7/8"	Class A	80139	0.85	35	0.90	White	D	Low		74%	\$\$\$
	30"x60"x7/8"	Class A	89141	0.85	35	0.90	White	D	Low		74%	\$\$\$
FLB	2'x2'x7/8"	Class A	88136	0.85	35	0.90	White, color ⁷	E,F,G,H	Low		74%	\$\$\$
	2'x4'x7/8"	Class A	89136	0.85	35	0.90	White	E,F,G,H	Low		74%	\$\$\$
	30"x30"x7/8"	Class A	80165	0.85	35	0.90	White	E,F,G,H	Low		74%	\$\$\$
	30"x60"x7/8"	Class A	89142	0.85	35	0.90	White	E,F,G,H	Low		74%	\$\$\$
SQ	2'x2'x1"	Class A	86345	0.80	40	0.90	White	A,B,C	Low		74%	\$\$
	2'x4'x1"	Class A	88345	0.80	40	0.90	White	A,B	Low		74%	\$\$
SLT	2'x2'x1"	Class A	86346	0.80	40	0.90	White	D	Low		74%	\$\$
	2'x4'x1"	Class A	88346	0.80	40	0.90	White	D	Low		74%	\$\$
FLB	2'x2'x1"	Class A	86347	0.80	40	0.90	White	E,F,G,H	Low		74%	\$\$
	2'x4'x1"	Class A	88347	0.80	40	0.90	White	E,F,G,H	Low		74%	\$\$
SQ	2'x2'x7/8"	Class A	86100	0.80	35	0.90	White	A,B,C	Low		74%	\$\$
	2'x4'x7/8"	Class A	86300	0.80	35	0.90	White	A,B	Low		74%	\$\$
	30"x30"x7/8"	Class A	86426	0.80	35	0.90	White	A,B	Low		74%	\$\$
	30"x60"x7/8"	Class A	86429	0.80	35	0.90	White	A,B	Low		74%	\$\$
SLT	2'x2'x7/8"	Class A	87200	0.80	35	0.90	White	D	Low		74%	\$\$
	2'x4'x7/8"	Class A	89600	0.80	35	0.90	White	D	Low		74%	\$\$
	30"x30"x7/8"	Class A	86500	0.80	35	0.90	White	D	Low		74%	\$\$
	30"x60"x7/8"	Class A	86466	0.80	35	0.90	White	D	Low		74%	\$\$
FLB	2'x2'x7/8"	Class A	87100	0.80	35	0.90	White	E,F,G,H	Low		74%	\$\$
	2'x4'x7/8"	Class A	89500	0.80	35	0.90	White	E,F,G,H	Low		74%	\$\$
	30"x30"x7/8"	Class A	86400	0.80	35	0.90	White	E,F,G,H	Low		74%	\$\$
	30"x60"x7/8"	Class A	86497	0.80	35	0.90	White	E,F,G,H	Low		74%	\$\$

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.ecomedes.com and at spot.ul.com.

ClimaPlus™ Warranty Performance³

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of pre-consumer (post-industrial) and post-consumer recycled content per FTC quidelines.



USG MARS HIGH-NRC/HIGH-CAC **ACOUSTICAL PANELS**

CLIMAPLUS™ PERFORMANCE WITH PLANT-BASED BINDER9













ORDER SAMPLES/LITERATURE

USG: usg.com or samplit@usg.com CGC: contact Sales Representative



FOR MOST UP-TO-DATE

AND LEED REPORT TOOL

PRODUCT CERTIFIED FOR LOW CHEMICAL

USG MARS™ **HIGH-CAC PANELS** 60/40

Œ.	UL
_	,
Cla	assified

HRC

Edge	Panel Size	Fire Rating	Item No.	NRC ¹⁰	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Recycled Content ¹	Panel Cost
		0		NRC	CAC	Ø		ø	Ø		3	\$
SQ	2'x2'x3/4"	Class A	86186	0.60	40	0.90	White, color ⁷	A,B,C	Low		76%	\$\$\$
	2'x4'x3/4"	Class A	87187	0.60	40	0.90	White	A,B	Low		76%	\$\$\$
SLT	2'x2'x3/4"	Class A	86786	0.60	40	0.90	White, color ⁷	D	Low		76%	\$\$\$
	2'x4'x3/4"	Class A	88786	0.60	40	0.90	White	D	Low		76%	\$\$\$
FLB	2'x2'x3/4"	Class A	86986	0.60	40	0.90	White, color ⁷	E,F,G,H	Low		76%	\$\$\$
	2'x4'x3/4"	Class A	88986	0.60	40	0.90	White	E,F,G,H	Low		76%	\$\$\$

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.ecomedes.com and at spot.ul.com.


ClimaPlus™ Warranty Performance³

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of pre-consumer (post-industrial) and post-consumer recycled content per FTC guidelines.

GRID PROFILE OPTIONS

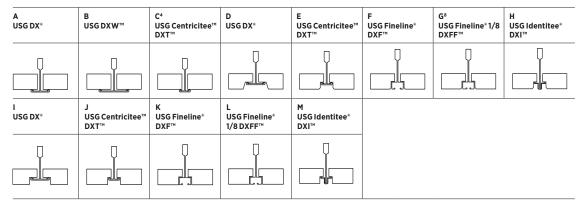

PHYSICAL DATA/ **FOOTNOTES**

Product literature

ASTM E1264 classification

ASTM E1264-22: Type IV, Form 1 and 2, Pattern E, G ASTM E1264-23: Type A, Form A2.1 and A2.2, Pattern E, G

ASTM E84 and CAN/ULC S102 surface-burning characteristics

Class A

Flame spread: 25 or less Smoke developed: 50 or less

Weight

109 - 136 lb /saft

Online tools

usgdesignstudio.com, cgcdesignstudio.com or usg.ecomedes.com

Thermal resistance

R-2.2 (3/4" panel) R-4.5 (1.3" panel)

Maximum backloading See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

Can be cleaned easily with a soft brush or vacuum. To clean white panels, use a clean white cloth with water or a mild detergent and wipe surface.

Metric sizes available

Contact sales for minimum quantities and lead times.

- For details, see USG Sustainability tool at usgdesignstudio.com or cgcdesignstudio.com.
- LR values are shown as averages
- For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102).

 Maximum 2'x2' with SQ edge panels.
- Acoustic values are for white only. Colored values are lower depending on specific
- color selected. White panels only. Available in Premium and Custom Colors.
- Available in Premium or Custom Colors.

 All USG Mars™ High-NRC Acoustical Panels with a "plant-based binder" label contain up to 65% plant-based material in the binder. For more information, please refer to the USG Mars Acoustical Panels Health Product Declaration, available at www.usg.com.

 10. It is not recommended to mix panels with varying NRC values in the same
- ceiling plane.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2487/rev. 07-24

© 2024 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

