
USG PANZ® METAL PANELS

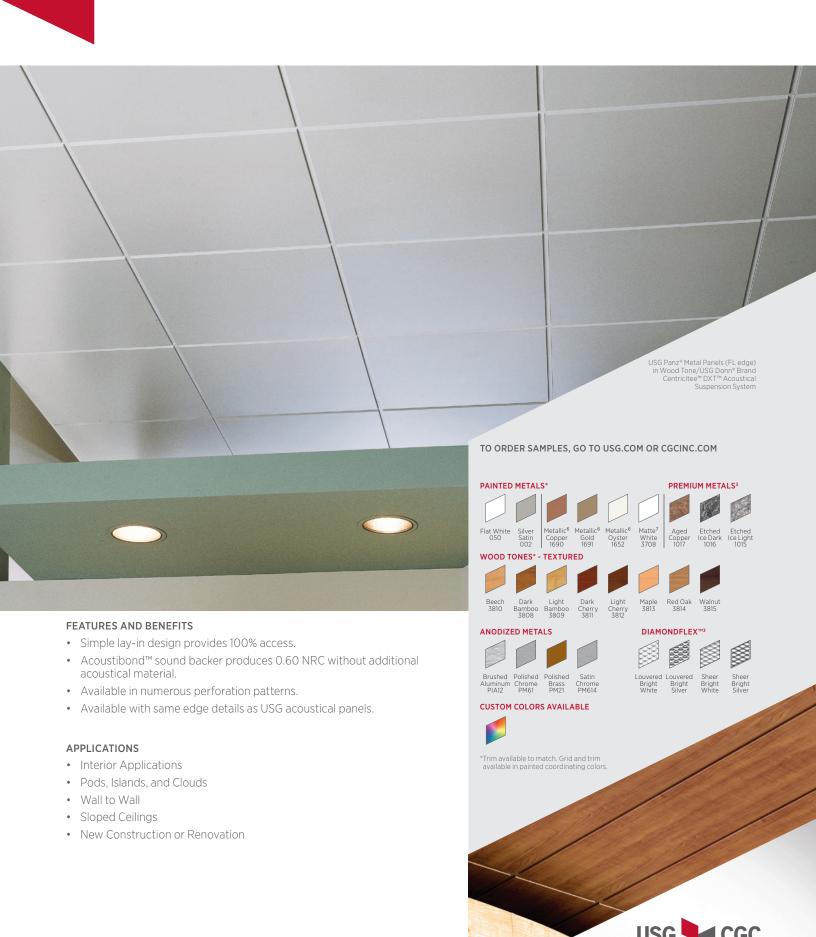

USG PANZ® METAL PANELS

ORDER SAMPLES/LITERATURE USG: usg.com or samplit@usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)



PRODUCT INFORMATION


Materials	Available Sizes	Finishes		
Panels: Aluminum	1' x 4', 1' x 5', 2' x 2', 2' x 4', 2' x 6', 2' x 8', 4' x 4', 20" x 60", 30" x 30", 30" x 60". Custom sizes available.	Painted, powder coated or anodized in a variety of optional perforation patterns. 2' x 2' panels available with perforation and/or embossing options.		
Description	Optional Acoustical Material	Sound Rating - NRC		
		Perforation CD06305NB (A062)	Perforation CD11717 (A116)	
Perforated panel	Acoustibond™ backer	0.60	0.70	

PANELS

ACOUSTICS⁴

Description	Optional Acoustical Material		Sound Rating - NRC		
			Perforation CD06305NB (A062)	Perforation CD11717 (A116)	
Perforated panel	Acousti	bond™ backer		0.60	0.70
Perforated panel	2", 0.75	2", 0.75 lb. fiberglass in polybag		0.85	0.90
Smooth Panel		Perforated Panel	Perforated Panel with Acoustibond™1,3 Backer		

EDGE DETAILS

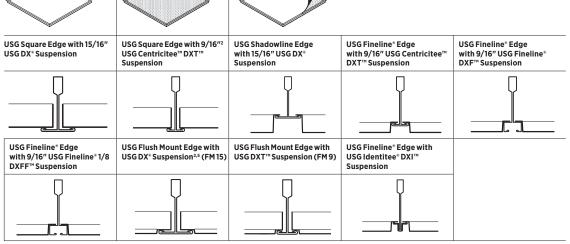



Low Emissions (VOC)

CDPH 01350 v1.2-2017 compliance on select finishes. see usg.com for more details and documentation.



High Recycled Content

USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

PHYSICAL DATA

Product literature

System brochure: IC415 Data sheet: IC314 Perforation selection guide: IC425 Warranty: SC2102 Specification: IC675 Care and Maintenance: IC518

Online tools

usgdesignstudio.com or cgcdesignstudio.com

ASTM E84 and CAN ULC S102 surface-burning characteristics (with Acoustibond™ backer) Class A Flame spread: 25 or less

Smoke developed: 50 or less

Light reflectanceFlat White: LR-0.80 (less with perforations).

Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to *Metal Ceilings Technical Guidelines* published by the Ceilings & Interior Systems Construction Association.

- Acoustibond™ standard backer not with DiamondFlex™ panels.
- 2. Only applicable for 2'x2' panels.
- 3. Refer to IC425 for additional NRC information based on perforation pattern.
- 4. If panel length is 60 inches then one stabilizer bar is required at midpoint. - If panel length is 96 inches then two stabilizer bars are required at the
- Cross tees $\,96$ inches used in large modules shall have hanger wires installed minimum 4 ft. o.c.
- 5. Flush Mount Edge is for 2'x2' panels only. Flush Mount available with both DX* and DXT™ grid profiles.
- 6. Panz panels available in metallics, with maximum 24" wide and 72" long.
- 7. Matte White 3708 is not available in 4' x 4' panel.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document

IC314/rev. 6-22

