


USG PARALINE® BAFFLES LINEAR CEILING AND WALL SYSTEM

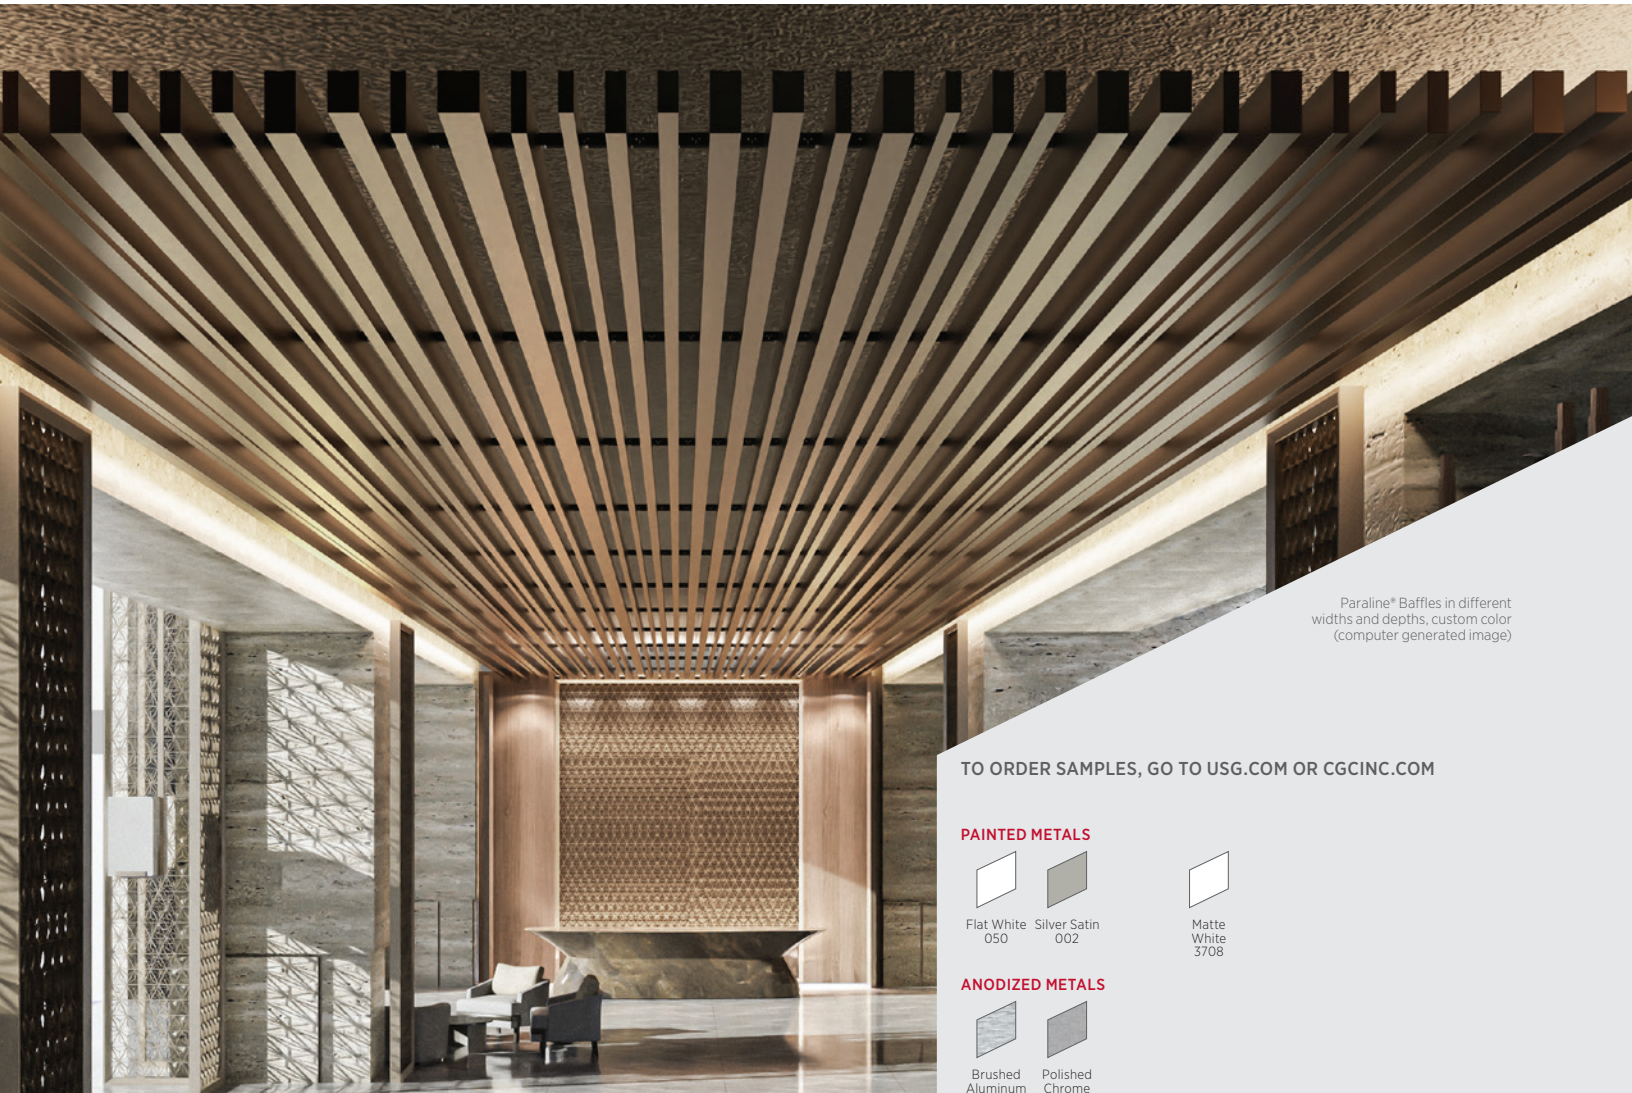

Paraline® Baffles in different widths and depths, custom color (computer generated image)

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM


PAINTED METALS



Flat White 050 Silver Satin 002

Matte White 3708

ANODIZED METALS



Brushed Aluminum PIA12 Polished Chrome PM61

TIMBRE™



Maple 4010 VG Fir 4011 Red Birch 4012 Cherry 4013 Walnut 4014 Mahogany 4015

CUSTOM COLORS AVAILABLE



FEATURES AND BENEFITS

- Elegant and durable linear metal ceiling system consists of variable width and length baffles attached to standard USG Donn® Brand DX®, Gridware™ or Curvatura™ grid systems
- Clip on design offers unlimited access with no plenum depth requirements
- Unconstrained by suspension system in independent suspension applications
- Ideal for providing combined visual accents and acoustical control
- Available in acoustical or non-acoustical options
- Grouping Bar for increased installation speed and exact baffle spacing

APPLICATIONS

- Interior Applications
- Wall Applications
- Pods, Islands, and Clouds
- Wall to Wall Ceilings
- Sloped Ceilings
- Curved Ceilings
- New Construction or Renovation
- Downward Accessible
- Layout is Field Customizable

USG PARALINE® BAFFLES

ORDER SAMPLES/LITERATURE
 USG: usg.com or samplitt@usg.com
 CGC: contact Sales Representative

TECHNICAL SERVICES
 800.USG.4YOU (874-4968)


FOR MOST UP-TO-DATE
 TECHNICAL INFORMATION
 AND LEED REPORT TOOL
 usgdesignstudio.com
 cgcdesignstudio.com




PRODUCT INFORMATION

| Materials | Baffle Sizes - Height x Width x Length | Fire Rating | LR | Recycled Content | Acoustical Performance Data |
|---|--|---------------------|---------------------------------|----------------------------------|---------------------------------------|
| Aluminum baffles; painted, anodized and powder coated | 4" x 1.5" x 24" - 144" 6" x 1.5" x 24" - 144" 4" x 2.0" x 24" - 144" 6" x 2.0" x 24" - 144" Standard lengths in 24" increments | Class A ASTM E84 | 0.90 for Matte White 3708 | Up to 65% Recycled Content | Up to 0.40 Sabins per LF ¹ |

DETAILS

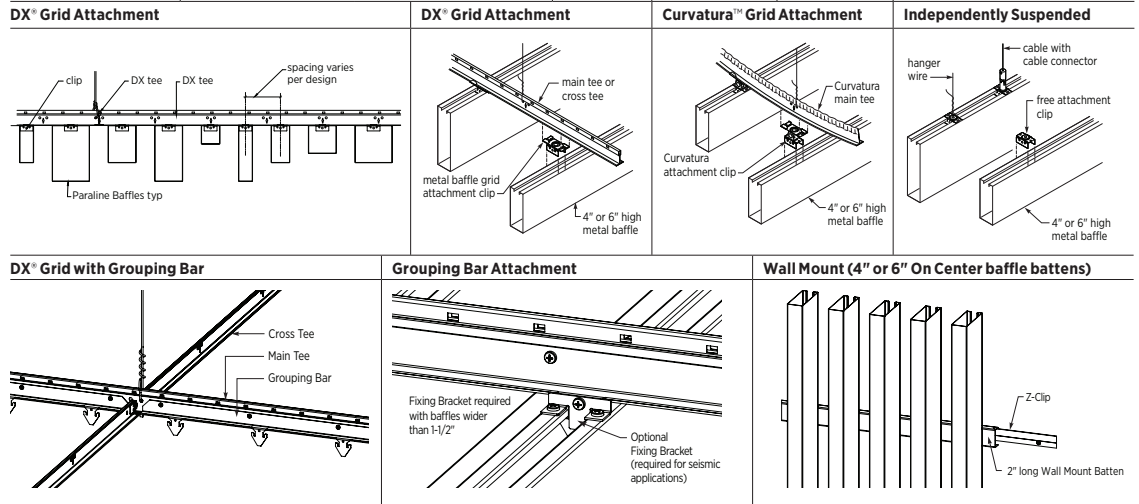

PERSPECTIVE

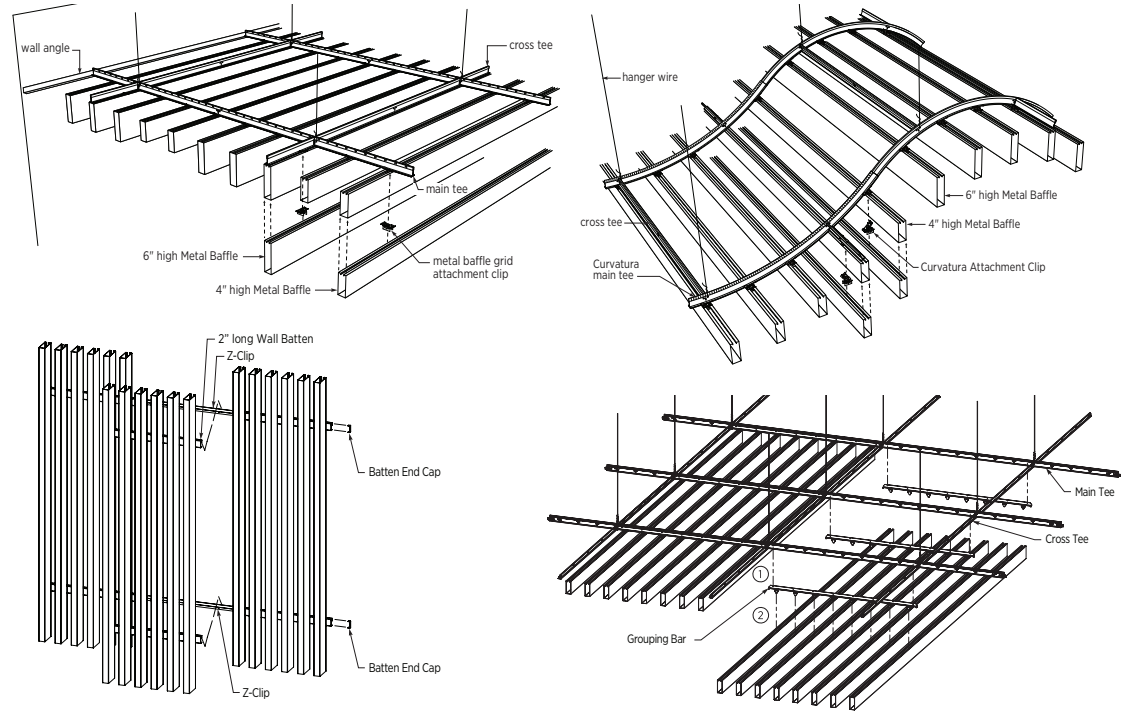

PHYSICAL DATA

Low Emissions (VOC)
 CDPH 01350 v1.2-2017 compliance on select finishes, see usg.com for more details and documentation.

Product literature
 System Guide: IC701
 Data sheet: IC700
 Installation Guide: IC702
 Field Cutting Instructions: IC718

Warranty: SC2102
 Perforation Selection Guide: IC425
 Cleaning Instructions: IC518

Online tools
 usgdesignstudio.com or cgcdesignstudio.com

The Timbre finish used on Paraline Baffles incorporates a coating manufactured by a third party manufacturer which provides a 30-year limited warranty under the circumstances set forth in the warranty. This limited warranty is issued to USG Ceilings Plus, LLC and USG Interiors, LLC ("USG"). In the event our customer experiences a problem with the coating covered by the third party manufacturer's limited warranty, USG will use the information you provide to file a claim under the limited warranty.

ASTM E84 and CAN/ULC S102 surface-burning characteristics (with Acoustibond™ backer)
 Class A
 Flame spread: 25 or less
 Smoke developed: 50 or less

Installation
 Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction. USG recommends checking with the authority having jurisdiction prior to designing and installing a suspended ceiling system.

Seismic
 Paraline Baffles with Grouping Bar has been engineered, full scale dynamic tested, and approved per AC156, AC368, and ASTM E318, test criteria when installed per USG installation instructions. System Approved for seismic categories A through F.

Limitation
 Some commercially acceptable color variation may occur between lots and between different size products of the same color. For more information about metal ceiling finishes, refer to *Metal Ceilings Technical Guidelines* published by the Ceilings & Interior Systems Construction Association (CISCA).

- Note**
- 1.5 in. wide x 4 in. high baffle with CD25039 (A250) perforation, Acoustibond backer and poly bag infill.
 - For perforated then post painted Paraline® Baffles use fiberglass in polybag for sound absorption
 - All perforations, including CD06305NB (AO62), are on vertical sides of baffles only.

Notice
 The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

IC700/rev. 4-23
 © 2023 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
 550 West Adams Street
 Chicago, IL 60661

The trademarks USG, CGC, ACOUSTIBOND, CURVATURA, DONN, DX, GRIDWARE, PARALINE, TIMBRE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

