

USG SANDRIFT™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

USG Sandrift™ Acoustical Panels
with ClimaPlus™ Performance, and
USG Donn® Brand DX® Acoustical
Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

FEATURES AND BENEFITS

- Uniquely textured cast product with durable surface that resists scrapes commonly caused by accessing the ceiling plenum.
- Integral color masks nicks and scratches.
- Optional Firecode® product designed to meet life-safety codes.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.
- USDA Certified Biobased Product.⁶
- VOC emissions meet CA Specification 01350.
- Balanced Acoustics. NRC and CAC.
- USG Sandrift™ Acoustical Panels are part of the Ecobluprint™ portfolio — meeting today's sustainability standards. For sustainability documentation go to USG.com or CGCInc.com.

APPLICATIONS

- Conference and Lobby Areas
- Department Stores
- Entertainment and Gaming Areas
- Executive Offices
- Restaurants


SUBSTRATE

- Cast Mineral Fiber


STANDARD COLORS



ADVANTAGE COLORS

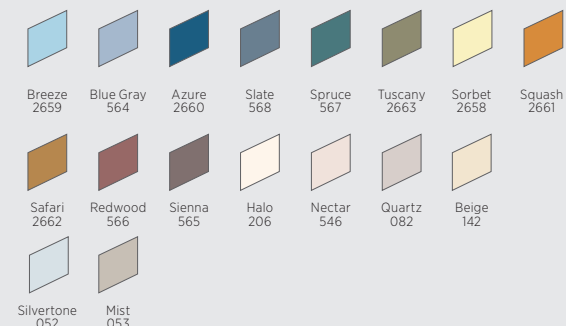

PREMIUM COLORS

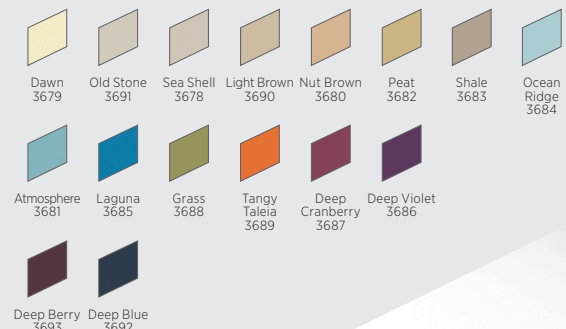

USG SANDRIFT™ ACOUSTICAL PANELS
CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
USG: usg.com or samplitt@usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com
usg.ecomedes.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL2818






















USG SANDRIFT™ PANELS

USG SANDRIFT™
BASIC PANELS

GRID PROFILE OPTIONS

PHYSICAL DATA/
FOOTNOTES

UL Classified													
Edge	Panel Size	Fire Rating ^{2,7}	Item No.	NRC	CAC Min.	LR ³	Color ⁵	Grid Options	VOC Emissions	Anti-Mold & Mildew/Sag Resistance	Abuse Resistant	Recycled Content ¹	Panel Cost
													
SL 	2'x2'x3/4" Paper-Back	Class A	808	0.70	38	0.83	White Standard Advantage Premium	A	Low			72%	\$\$\$
FL 	2'x2'x3/4" Paper-Back	Class A	809	0.70	38	0.83	White Standard Advantage Premium	C,D,E, F	Low			72%	\$\$\$
SL 	2'x2'x3/4" Paper-Back		815	0.55	35	0.83	White	B	Low	—		75%	\$\$\$

Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.2 - 2017 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.ecomedes.com and at spot.ul.com.

ClimaPlus™ Warranty Performance⁴

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

USG classifies High Recycled Content as greater than 50%. Total recycled content is based on product composition of pre-consumer (post-industrial) and post-consumer recycled content per FTC guidelines.

Firecode®

Abuse Resistant

A USG DX*	B USG DXL™	C USG Centricitee™ DXT™	D USG Finline® DXF™	E USG Finline® 1/8 DXFF™	F USG Identitee® DXI™

Product literature
Data sheet: SC1841

ASTM E1264 classification
ASTM E1264-22 Type III, Form 4, Pattern Z
ASTM E1264-23 Type A, Form A1.4, Pattern Z

ASTM E84 and CAN/ULC S102 surface-burning characteristics
Class A
Flame spread: 25 or less
Smoke developed: 50 or less

UL Type
AP, AP-1, AP-2, AP-3

Weight
1.55 lb./sq. ft. (Class A)
1.72 lb./sq. ft. (Firecode® weight)

Online tools
usgdesignstudio.com, cgcdesignstudio.com or usg.ecomedes.com

Thermal resistance
R-1.7 (Class A)
R-1.3 (Firecode®)

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Texture
The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing cast products by production lot number.

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Notes

- For details, see USG Sustainability tool at usgdesignstudio.com or cgcdesignstudio.com.
- Firecode® products are approved for use in fireresistance rated UL designs, where the designs allow for the UL Type Designation.
- LR values are shown as averages.
- For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).
- To highlight the unique texture of USG Sandrift™ Acoustical Panels with ClimaPlus™ Performance, choose light colors. See Colors selector for more information.
- This product has achieved both BioPreferred initiatives: Federal Procurement Preference and Certified Product Labeling. See the complete listing of all USG ceiling panels on biopreferred.gov website.
- It is not recommended to mix Firecode™ with Class A panels in the same ceiling plane.

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1841/rev. 8-24
© 2024 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXF, DXFF, DXI, DXL, DXT, ECOBLUEPRINT, FINELINE, FIRECODE, IDENTITEE, SANDRIFT, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

