
USG TRUE® WOOD GRILLES



APPLICATIONS

- Interior Applications
- Pods, Islands, and Clouds
- Wall to Wall Ceilings
- Sloped Ceilings
- New Construction or Renovation
- Downward Accessible (Modular)

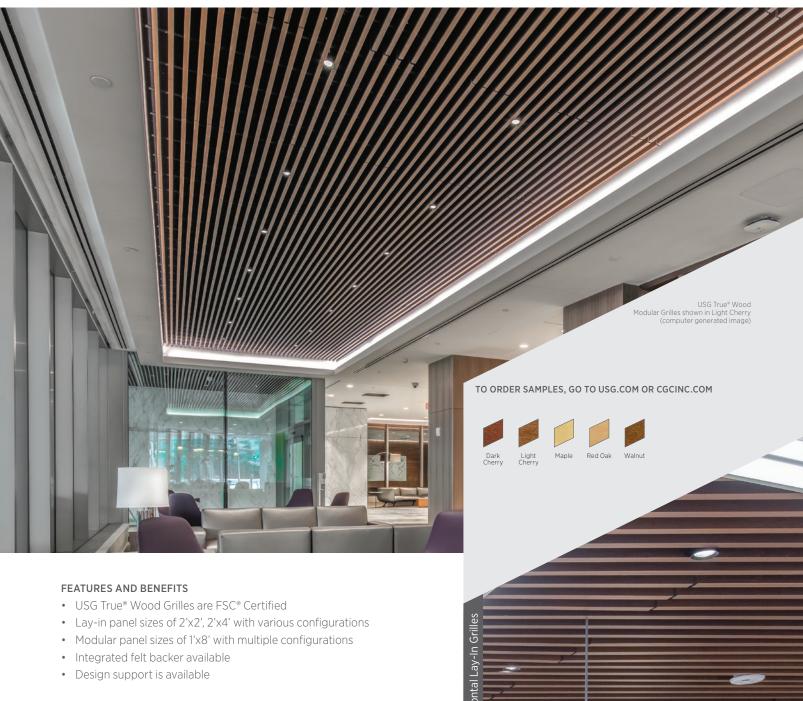

USG TRUE WOOD LAY-IN GRILLES

ORDER SAMPLES/LITERATURE USG: usg.com or samplit@usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)



VERTICAL SLAT ORIENTATION

USG True* Wood Lay-in Grilles offer universal installation and design flexibility as they can be installed in multiple orientations. Panels are designed to lay into USG Donn* Brand grid systems, offering both aesthetic appeal and easy access to mechanicals above. In the vertical orientation, often the slats can be used to shield the plenum.



Designed for 9/16" Intermediate or Heavy Duty Grid Systems

Туре	Product Size (nominal)	Width	Length	Slat Width	Slat Height	Slats per Panel	Slat Orientation	Weight
Lay-in Grille	24" x 24" x 2"	24"	24"	1/2"	1-1/2"	12	Vertical	1.24 lb./sq. ft.
Lay-in Grille	24" x 48" x 2"	24"	48"	1/2"	1-1/2"	12	Vertical	1.20 lb./sq.ft.

Designed for 15/16" Intermediate or Heavy Duty Grid Systems

Туре	Product Size (nominal)	Width	Length	Slat Width	Slat Height	Slats per Panel	Slat Orientation	Weight
Lay-in Grille	24" x 24" x 2"	24"	24"	1/2"	1-1/2"	12	Vertical	1.26 lb./sq.ft.
Lay-in Grille	24" x 48" x 2"	24"	48"	1/2"	1-1/2"	12	Vertical	1.23 lb./sq. ft.



Designed for 9/16" Intermediate or Heavy Duty Grid Systems

Туре	Product Size (nominal)	Width	Length	Slat Width	Slat Height	Slats per Panel	Slat Orientation	Weight
Lay-in Grille	24" x 24" x 1"	24"	24"	1-1/2"	1/2"	12	Horizontal	1.24 lb./sq. ft.
Lay-in Grille	24" x 48" x 1"	24"	48"	1-1/2"	1/2"	12	Horizontal	1.20 lb./sq. ft.

Designed for 15/16" Intermediate or Heavy Duty Grid Systems

Туре	Product Size (nominal)	Width	Length	Slat Width	Slat Height	Slats per Panel	Slat Orientation	Weight
Lay-in Grille	24" x 24" x 1"	24"	24"	1-1/2"	1/2"	10	Horizontal	1.10 lb./sq. ft.
Lay-in Grille	24" x 48" x 1"	24"	48"	1-1/2"	1/2"	10	Horizontal	1.10 lb./sq. ft.

GRID PROFILE OPTIONS

A USG DX*/DXL™ (Intermediate or Heavy Duty, 1-1/2" high)	B USG Centricitee™ DXT™ (Intermediate or Heavy Duty, 1-1/2" high)

ACOUSTICAL OPTIONS

Refer to Sales Brochure: IC716




USG TRUE WOOD MODULAR GRILLES

TECHNICAL SERVICES 800 USG.4YOU (874-4968)

ORDER SAMPLES/LITERATURE
USG: usg.com or samplit@usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800 USG. 4YOU (874-4968)





USG True* Wood Modular Grilles offer a simple installation and high aesthetic appeal. Panels can be easily installed on USG Donn* Brand grid systems with either a wood screw or square clip, providing easy access to the plenum. The vertical orientation of the slats shields the plenum from sight. Optional felt backer can be factory-installed.

Designed for 15/16" Heavy Duty Grid Systems

Туре	Product Size (nominal)	Width	Length	Slat Height	Slat Width	Slats per Panel	Slat Spacing	Slat Orientation	Mounting	Weight
Modular Grille	12" x 96" x 1-7/8"	12"	96"	1-3/8"	5/8"	6	1-3/8"	Vertical	Batten	1.32 lb./sq. ft.
Modular Grille	12" x 96" x 1-7/8"	12"	96"	1-3/8"	5/8"	8	7/8"	Vertical	Batten	1.70 lb./sq. ft.
Modular Grille	12" x 96" x 2-3/4"	12"	96"	2-1/4"	5/8"	6	1-3/8"	Vertical	Batten	2.10 lb./sq. ft.
Modular Grille	12" x 96" x 2-3/4"	12"	96"	2-1/4"	5/8"	8	7/8"	Vertical	Batten	2.63 lb./sq.ft.

BATTEN AND DOWEL



Designed for 15/16" Heavy Duty Grid Systems

Туре	Product Size (nominal)	Width	Length	Slat Height	Slat Width	Slats per Panel	Slat Spacing	Slat Orientation	Mounting	Weight
Modular Grille	12" x 96" x 3-3/4"	12"	96"	3-1/4"	5/8"	6	1-3/8"	Vertical	Batten & Dowel	2.86 lb./sq. ft
Modular Grille	12" x 96" x 2-3/4"	12"	96"	2-1/4"	1"	4	2"	Vertical	Batten & Dowel	2.20 lb./sq. ft
Modular Grille	12" x 96" x 3-3/4"	12"	96"	3-1/4"	1"	4	2"	Vertical	Batten & Dowel	3.10 lb./sq. ft.
Modular Grille	12" x 96" x 4-3/4"	12"	96"	4-1/4"	1"	4	2"	Vertical	Batten & Dowel	3.90 lb./sq. ft
Modular Grille	12" x 96" x 3-3/4"	12"	96"	3-1/4"	1-1/4"	3	2-3/4"	Vertical	Batten & Dowel	2.86 lb./sq. ft
Modular Grille	12" x 96" x 4-3/4"	12"	96"	4-1/4"	1-1/4"	3	2-3/4"	Vertical	Batten & Dowel	3.66 lb./sq.ft
Modular Grille	12" x 96" x 5-3/4"	12"	96"	5-1/4"	1-1/4"	3	2-3/4"	Vertical	Batten & Dowel	4.47 lb./sq. ft

GRID PROFILE OPTIONS

USG DX*/DXL™ (Heavy Duty, 1-1/2" high)



ACOUSTICAL OPTIONS

Refer to Sales Brochure: IC716



USG TRUE WOOD GRILLES

ORDER SAMPLES/LITERATURE USG: usg.com or samplit@usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE TECHNICAL INFORMATION AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)



ACCESSORIES

Name	Description	Part Number	Unit of Measure	Qty
Batten Modular	Plywood Batten, stained black (11-7/8" Length, 1-1/4" Width)	749620	Carton	50
Batten (Middle) Lay-in	Plywood Batten, stained black (23-3/4" Length, 1-1/4" Width)	749621	Carton	50
Batten (End) Lay-in	Plywood Batten, stained black (23-3/4" Length, 3" Width)	749622	Carton	50
Perimeter Bracket	Secure Wood Trim to Ceiling Assembly	749623	Carton	50
180° Splice Plate	Splice Lengths of Wood Trim Together	749624	Carton	50
90° Splice Plate	Splice Corners of Wood Trim Together	749625	Carton	50
Lay-in Sample	Submittal Sample for Lay-in Grille	600648	Each	1
Modular Sample	Submittal Sample for Modular Grille	600649	Each	1
Felt Backer	Polyester Felt Backer, 1 mm thick, 12" width x 300 feet	749626	Roll	1
Felt Backer	Polyester Felt Backer, 1 mm thick, 24" width x 300 feet	749627	Roll	1
Dowel	1/2" Diameter x 11-7/8" Long; stained black	749628	Carton	50
Mounting Clip	Square Clip Used to Secure Battens to Grid	749629	Carton	50
PFB	Panel Fixing Bracket	746602	Carton	50

PHYSICAL DATA

Product literature Data sheet: IC715 Sales brochure: IC716 Finishes sheet: IC559 Warranty: SC2102 Installation Guide: IC274760

Online tools usgdesignstudio.com or cgcdesignstudio.com

- Notes

 Building environmental conditions should be maintained in accordance with ASHRAE Standard 62.1.2013.
- Refer to CICSA Wood Ceilings Technical Guidelines for best practices on installed wood ceilings.
- Color Disclaimer: Printed and/or online color swatches are only reproductions of actual standards and will vary in appearance due to differences in monitor and printer output.
- Wood Disclaimer: Wood is a natural grain product with variations in grain, texture and color often ranging from light to dark, thereby affecting the surface look. Product finishes are spray-applied stain or sealer coats.
- $\boldsymbol{-}$ These representations should not be used to finalize color
- Fire testing results available upon request.

Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

