



**USG GRIDWARE™ AND
USG WIREWORKS™
OPEN-CELL**

SYSTEM GUIDE

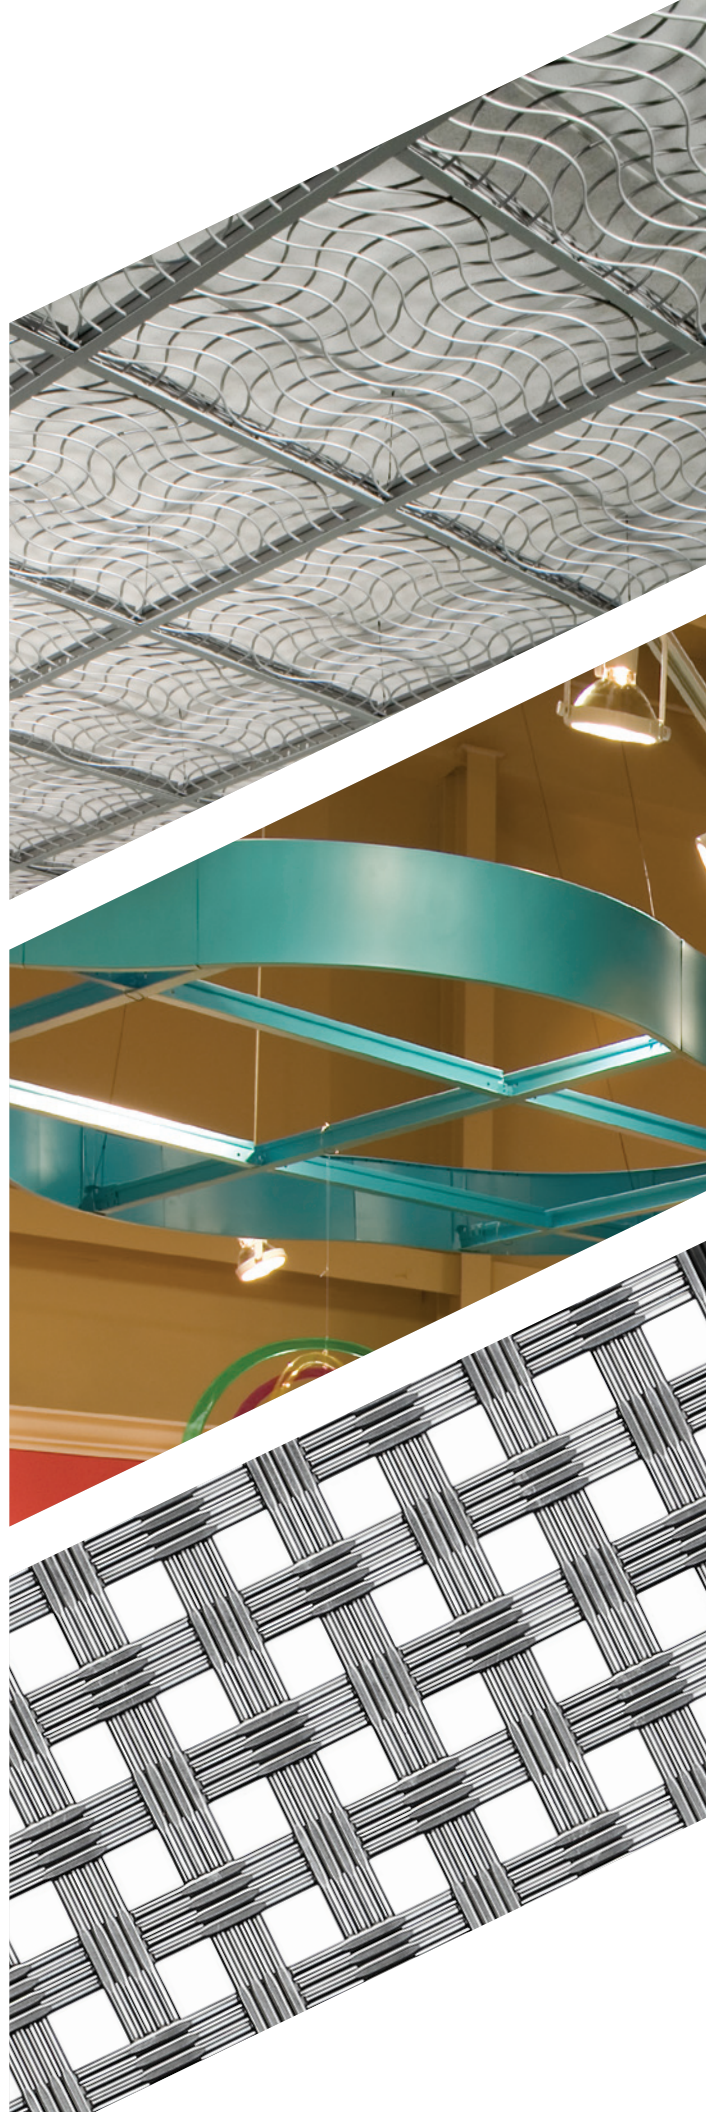


IT'S YOUR WORLD. BUILD IT.®

GIVE YOUR DESIGN LANGUAGE...

The open-cell ceiling system creates structure without obstruction. Latticed metal 2'x 2' WireWorks™ ceiling panels available in a range of dynamic patterns nestle into the high-quality Donn® brand GridWare™ suspension system. Punched with only the necessary cross-tee holes, GridWare™ tees assure clean, uncluttered grid lines, without unsightly perforations.

Retail
Offices
Lobbies
Hospitality
Entertainment



USG GRIDWARE™ AND USG WIREWORKS™

SYSTEM GUIDE

UNDERSTAND YOUR SYSTEM

DESIGN YOUR SYSTEM

SPECIFY YOUR SYSTEM

FOR MORE INFORMATION

Use this brochure to select and specify WireWorks™ ceiling panels and the GridWare™ suspension system to create signature details. Use these two products together as a system or integrate WireWorks™ panels into a standard ceiling suspension system. Or, use the GridWare™ suspension without panels to subtly set boundaries and highlight key areas. Inside, you'll find comprehensive information about components, design ideas, and guide specifications.

3	System Overview
4	Components
8	Design Options
10	Ceiling Perimeters
11	Product Identification System

Technical Service
800 USG.4YOU (874-4968)

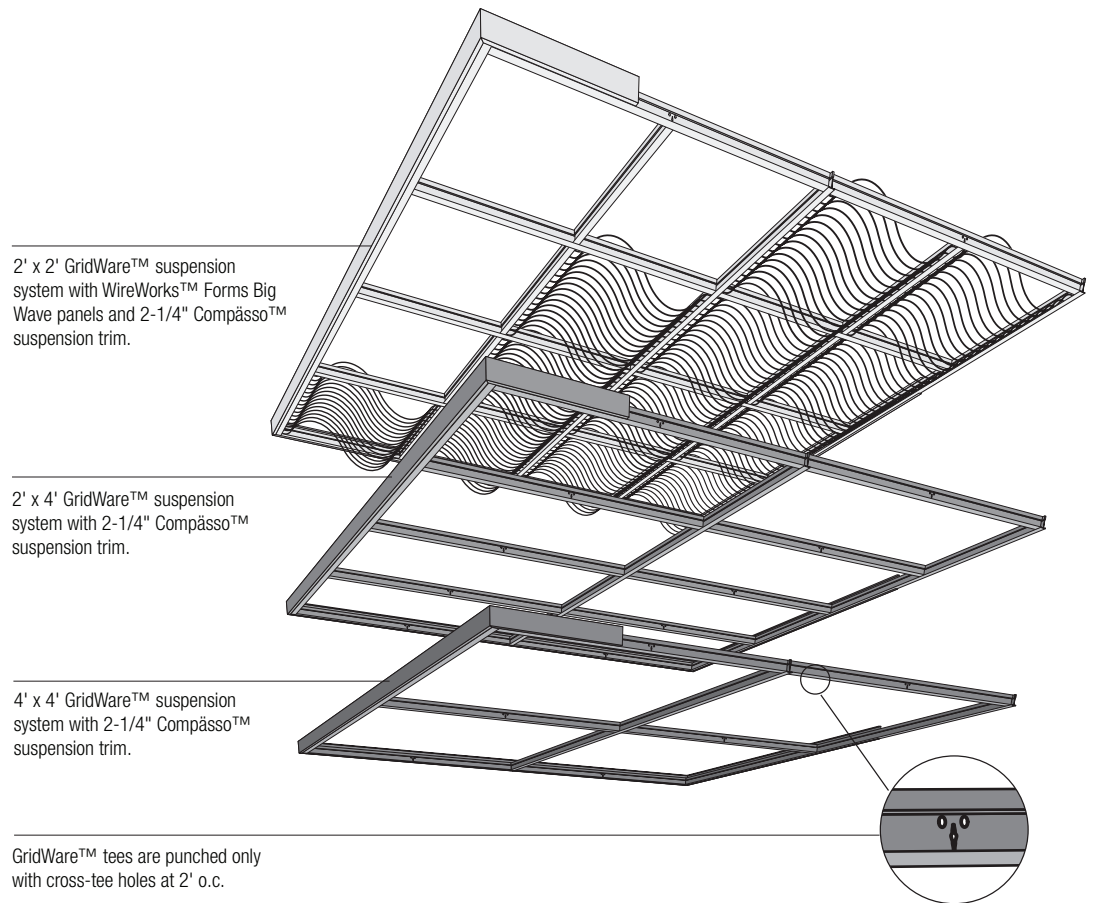
Website
usg.com or cgcinc.com

SYSTEM OVERVIEW

The open-cell ceiling system brings together a collection of graceful wire ceiling panels and a sleek, streamlined suspension system to create sophisticated planes that subtly define and organize space. These high-quality components also allow exceptional flexibility.

WireWorks™ ceiling panels can be used with the GridWare™ suspension system, which features minimal main-tee punching (only cross-tee holes for 2'x2' modules), or integrated into a standard ceiling suspension system.

The GridWare™ suspension system can also be used alone to enhance the airiness of your design. This suspension is available in three face widths, and exposed edges may be finished with Compasso™ suspension trim.



SYSTEM COMPONENTS

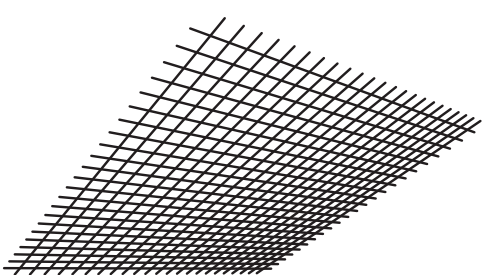
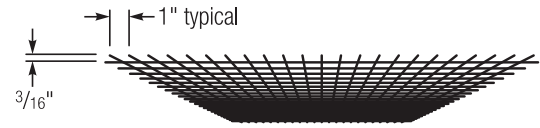
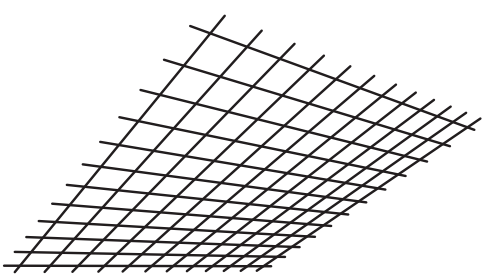
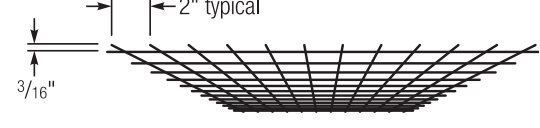
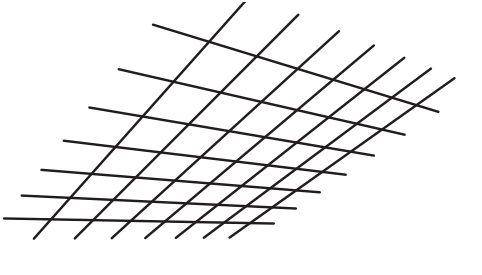
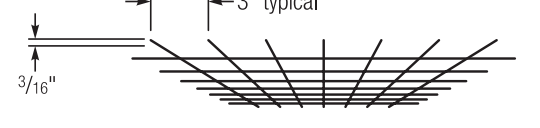
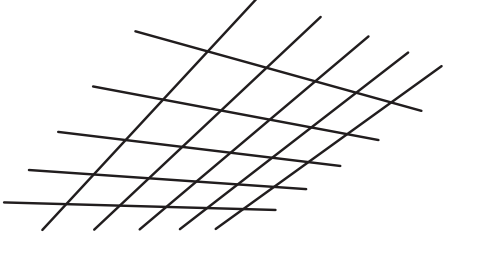
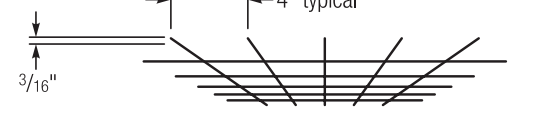
WIREWOKS™ CELLS PANEL OPTIONS

COLORS

WireWorks™ metal ceiling panels create a clean, linear gridwork with a choice of four cell sizes. Panels measure 2' X 2' and feature 1/8" wire.

WireWorks™ Cells Panels are available in High-Gloss White, Chrome, Flat White, Flat Black, Silver Satin, High-Gloss Red, High-Gloss Black and custom colors.

- 1" X 1" CELLS
- 2" X 2" CELLS
(Available in 4' x 4' Ceiling Panels)
- 3" X 3" CELLS
(Available in 4' x 4' Ceiling Panels)
- 4" X 4" CELLS
(Available in 4' x 4' Ceiling Panels)

Face	Side Profile
	
	
	
	

SYSTEM COMPONENTS


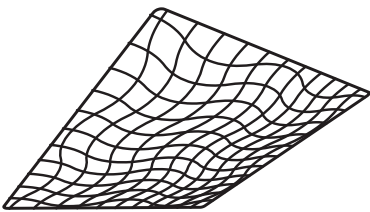
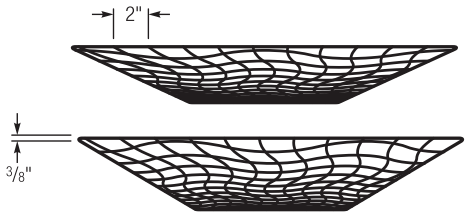
WIREWOKS™ FORMS PANEL OPTIONS

WireWorks™ Forms ceiling panels offer a choice of four dynamic, curvy patterns, including two 3-dimensional designs. Panels measure 2' x 2' and feature 3/16" wire.




COLORS

WireWorks™ Forms Panels are available in High-Gloss White, Chrome, Flat White, Flat Black, Silver Satin, High-Gloss Red, High-Gloss Black and custom colors.




WEAVE

	Face	Front and Side Profile
		


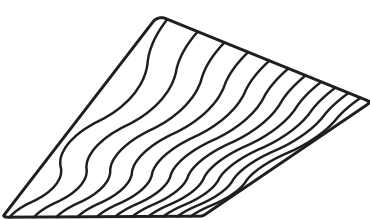
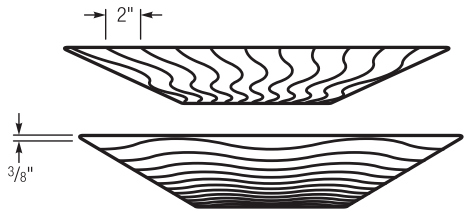
RIPPLE

		
--	---	--

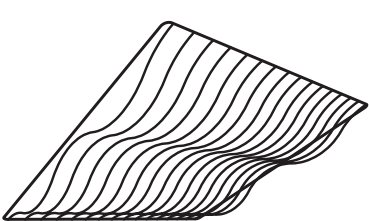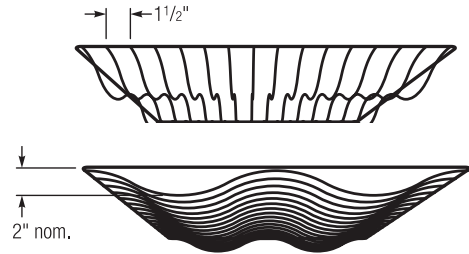SMALL WAVE

		
---	--	---

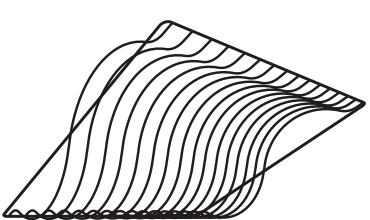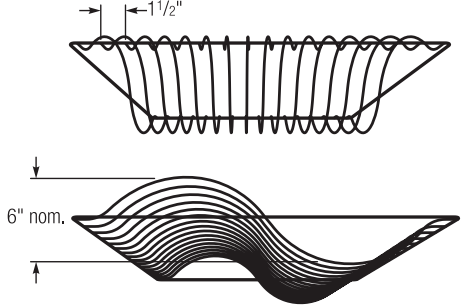BIG WAVE

		
---	--	---

SYSTEM COMPONENTS

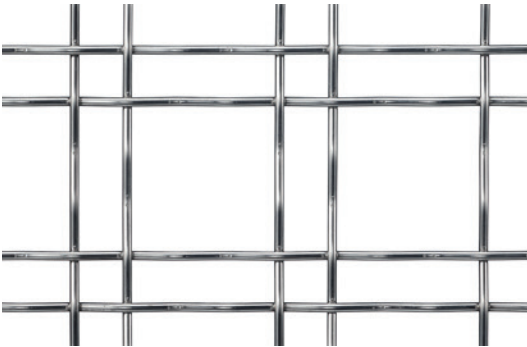
WIREWORKS™ WOVEN PANEL OPTIONS

COLORS


WireWorks™ Woven Ceiling panels offer a choice of six dynamic pattern designs. Panels measure 2' x 2' and feature varied shape and size wires.

WireWorks™ Woven panels are available in High-Gloss White, Chrome, Flat White, Flat Black, Silver Satin, High-Gloss Red, High-Gloss Black, and custom colors.


DOUBLE ROUND




DOUBLE ROUND SPIRAL

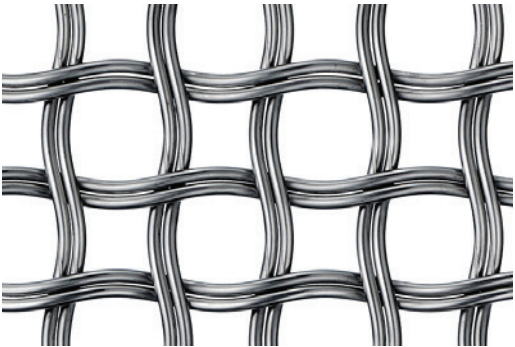

DOUBLE FLAT

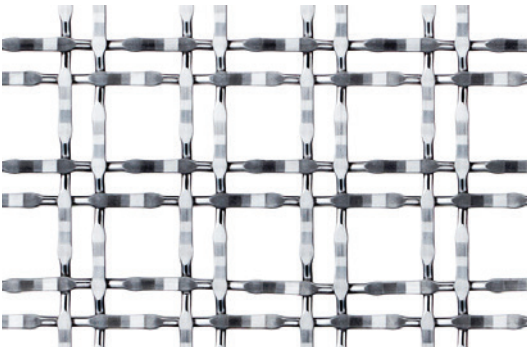


4-WIRE FLAT

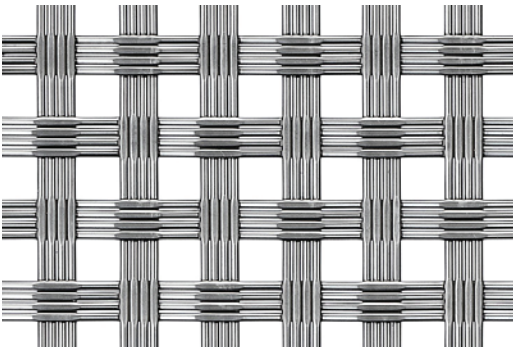

FLAT PLAIN



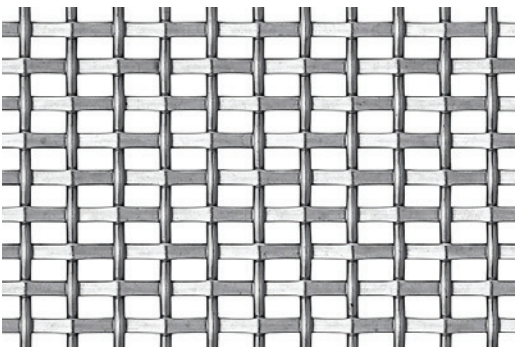FLAT/ROUND







GRIDWARE™ SUSPENSION SYSTEM

WireWorks™ Cells, WireWorks™ Forms & WireWorks™ Woven ceiling panels fit into the GridWare™ suspension system. This easy-to-design system features a 1-1/2" tee height and is available in three standard grid profiles for added design options. The GridWare™ ceiling system includes a 1-1/2"-high wall angle to match tee height and readily accommodates standard 2'x 2' and 2'x 4' lay-in light fixtures and air diffusers.

COLORS

Flat White, Silver Satin, Flat Black.¹ Custom colors also available.

FACE OPTIONS


1-1/2" FACE GWDXW	15/16" GWDX	9/16" FACE GWDXT	WALL ANGLE GWM9
			
Heavy Duty	Intermediate Duty	Intermediate Duty	—

ASTM CLASS


COMPONENTS

Main tees are punched 12" from each end and every 24" in between. 4' cross tees have one center punch; 2' cross tees have no punches.

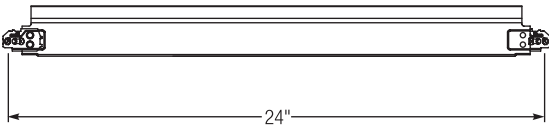
24" Cross Tee



48" Cross Tee

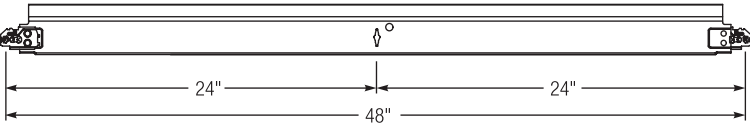

12' Main Tee

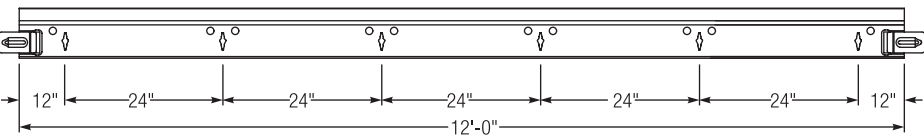

1. Colors coordinate with but do not match stock paint colors for WireWorks ceiling panels.

DESIGN OPTIONS

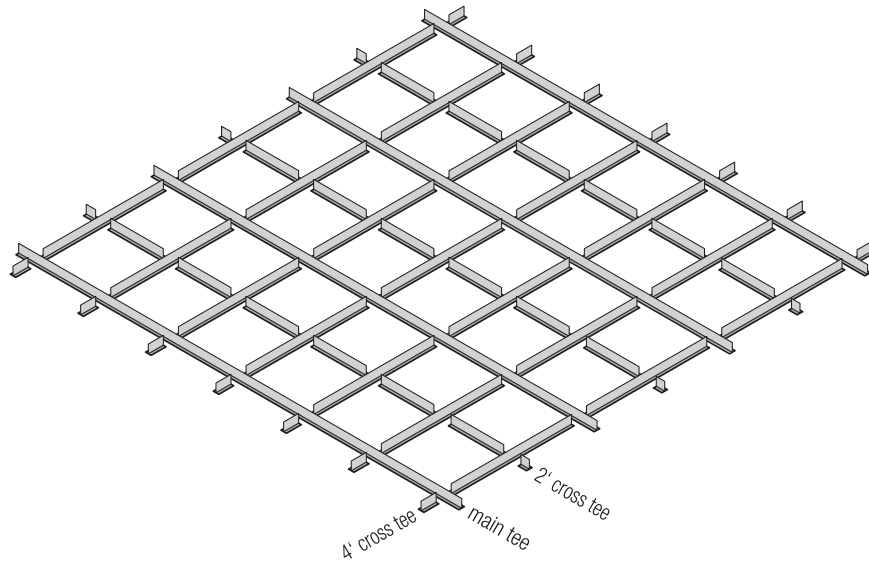
SUSPENSION SYSTEM

The GridWare™ system installs just like a standard T-bar suspension system. WireWorks™ panels lay in as easily as acoustical ceiling panels, but add a lightness and energy that no standard panel can provide.


The GridWare™ suspension system is punched to create standard 2' x 2' openings and accommodate all WireWorks™ and WireWorks™ Forms panels. The system can also create 2' x 4' and 4' x 4' openings with minimal visible punching.

STANDARD GRIDWARE™ ASSEMBLIES

2' x 2' Openings




2' x 4' Openings

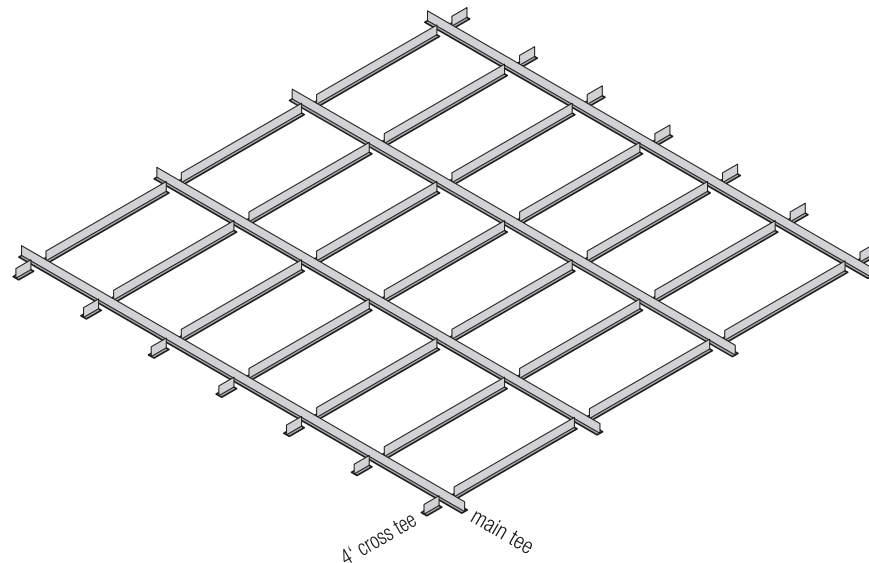

DESIGN OPTIONS

STANDARD GRIDWARE™ ASSEMBLIES

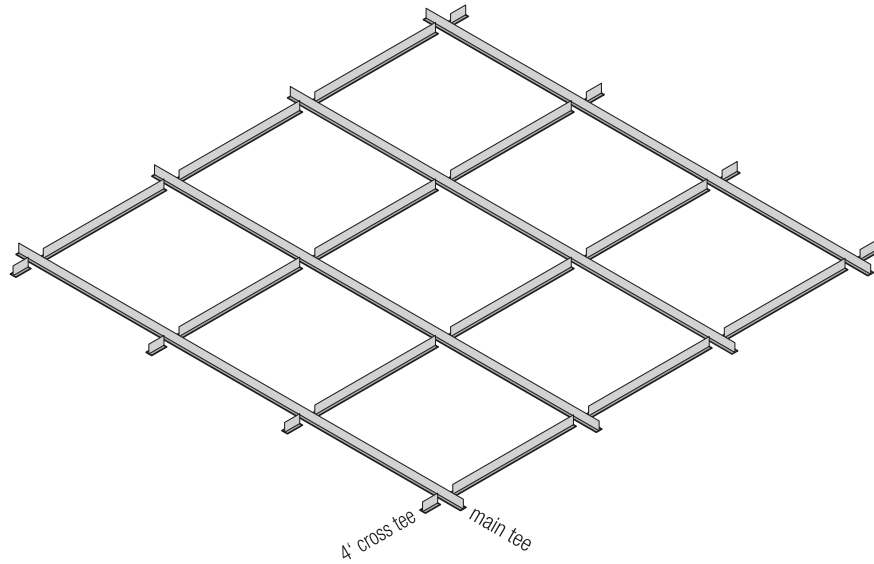4' x 4' Openings




CEILING PERIMETERS

EDGE DETAILS


Openings less than 24"

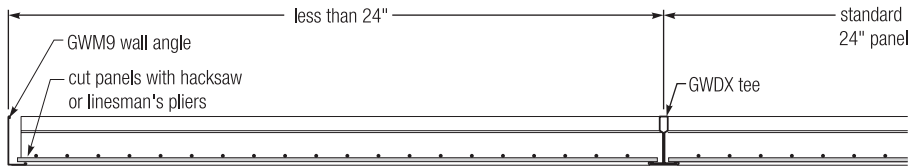At the perimeter where openings may be less than 24", (WireWorks™ Cells, Forms and Woven) panels may be cut to fit with a hacksaw or linesman's pliers.




24"-wide Openings

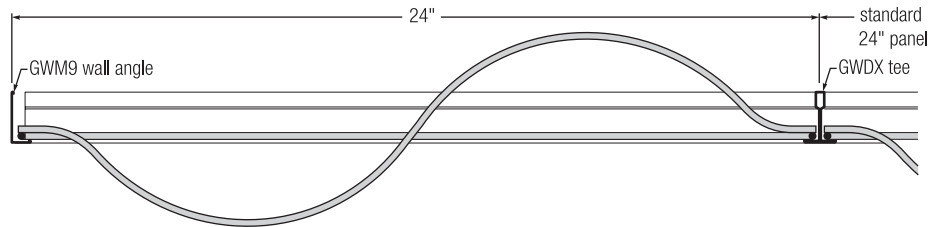
WireWorks™ Forms Ripple, Small Wave and Big Wave panels can be cut parallel to the inner design wires but not perpendicular; when perpendicular to the wall, these panels require openings with a full 24" width at the perimeter.



Cut Parallel




Do Not Cut Perpendicular



COMPÄSSO™ EDGE TRIM

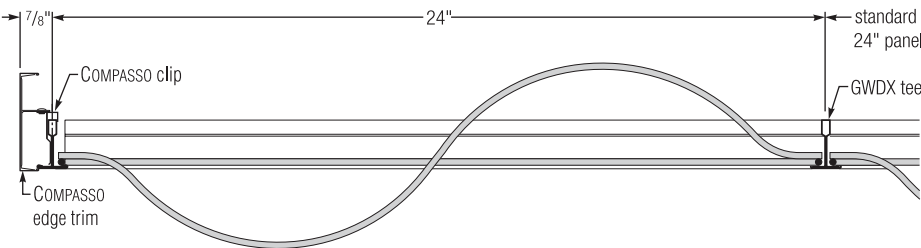Ceiling islands may be finished with Compässa™ edge trim for a clean, streamlined appearance.



APPLICATION GUIDE SPECIFICATIONS

PART 1: GENERAL

1.1 Summary	A. Description of Work: Work of this Section includes, but is not limited to, the following 1. Metal suspension systems. 2. Trim and accessories.
1.2 Related Work Specified Elsewhere	A. See Section _____ - HVAC B. See Section _____ - Lighting C. See Section 095100(09150) - Acoustical Ceilings
1.3 Submittals	A. Product Data: Submit manufacturer's specifications and installation instructions with Project conditions and materials clearly identified or detailed for each required system.
1.4 System Requirements	A. Performance Requirements: Fabricate and install systems as indicated but not less than that required to comply with ASTM C754 under the following conditions: 1. A pre-engineered drywall suspension system consisting of straight main tees and straight furring cross tees, that snap together as a finished decorative ceiling element or to support the insert of decorative wire-grate panels and independently supported light fixtures, and air diffusers, where applicable.
1.5 Quality Assurance	A. Reference Standards 1. ASTM C635, Standard Specifications for Metal Suspension Systems 2. ASTM C636, Recommended Practice for Installation of Metal Suspension Systems. 3. Cisca Ceiling Systems Installation Handbook B. Submittals 1. Samples: Submit actual samples and technical data for suspension system main tees and cross tees for review. 2. Shop Drawings: a. Reflected ceiling plans: Submit ceiling suspension system layout indicating dimensions, lighting fixture locations, and related mechanical components. b. Assembly drawings: Indicate installation details, accessory attachments and installation of related lighting fixtures and related mechanical system components. 3. Manufacturer's Data: a. System Details: Submit manufacturer's catalogue cuts or standard drawing showing details of system with project conditions clearly identified and manufacturer's recommended installation instructions
1.6 Delivery, Storage and Handling	A. Delivery: 1. Deliver material to site promptly without undue exposure to weather. 2. Deliver in manufacturer's unopened containers or bundles, fully identified with name, brand, type and grade. B. Inspection: 1. Promptly inspect delivered materials, file freight claims for damage during shipment, and order replacement materials as require. Any damaged materials shall be promptly removed from the job site C. Storage: 1. Store above ground in dry, ventilated space. 2. Protect materials from soiling, rusting and damage. 3. Store board to be directly applied to masonry walls at 70 °F for 24 hours prior to installation. D. Handling: 1. Handle in such a manner to insure against racking, distortion or physical damage of any kind.
1.7 Project Conditions	A. Environmental Requirements 1. Do not install system or any parts until space is enclosed and weatherproof, wet-work is complete and dry, work above installation is complete and space temperature and humidity has been maintained as designed for occupancy.

APPLICATION GUIDE SPECIFICATIONS

PART 2 PRODUCTS

1.8

Coordination with Other Work

- A. General:
 1. Coordinate with other work including mechanical and electrical work and partition systems. Installation of conduit and ductwork above suspension system shall be complete before installation of suspension system.
- B. Protection:
 1. Follow good safety and industrial hygiene practices during handling and installing of all products and systems, with personnel to take necessary precautions and wear appropriate personal protective equipment as needed. Read Material Safety Data Sheets and related literature for important information on products before installation. Contractor to be solely responsible for all personal safety issues during and subsequent to installation; architect, specifier, owner and manufacturer will rely on contractor's performance in such regard.

2.1

Manufacturer

- A. All manufactured by USG (United States Gypsum Company, USG Interiors), Chicago, IL, USA, in compliance with applicable ASTM Standards.
 1. Donn® Brand GridWare™ Suspension System
 2. Donn® Brand WireWorks™ Cells open-cell wire panels [Delete if not used]
 3. Donn® Brand WireWorks™ Forms open-cell wire panels [Delete if not used]
 4. Donn® Brand WireWorks™ Woven open-cell wire panels [Delete if not used]

2.2

Materials

- A. Donn® Brand GridWare™ Suspension System - Commercial quality, cold-rolled steel, hot dipped galvanized coated; finish paint color (Flat Black), (Flat White), or (Silver Satin); punched only every 24"; Listed products establish standard of quality and are manufactured by USG Interiors (USG), Chicago, IL.
 1. Main Tees: 1-1/2" High x 144" Long, (GWDX 15/16" Face), (GWDXT 9/16" Face), or (GWDWX 1-1/2" Face) painted 360 degrees.
 2. Cross Members: 1-1/2" High, (GWDX-224 15/16" Face x 24" Long), (GWDX-424 15/16" Face x 48" Long), (GWDXT-224 9/16" Face x 24" Long), (GWDXT-424 9/16" x 48" Long), (GWDWX-224 1-1/2" Face x 24" Long), or (GWDWX-424 1-1/2" Face x 48" Long) painted 360 degrees; quick release cross tee ends for positive locking and removability without tools; with exposed chromate clips, field painted to match grid color finish (left unpainted).
 3. Wall Moldings: 9/16" Face x 1-1/2" High; finish paint color (Flat Black), (Flat White), or (Silver Satin). (GWM-9 9/16" x 1-1/2" x 144" long wall molding),
 4. Field Touch-up Paint Kit: color to match finish selected on Grid from USG Interiors (USG), Chicago, IL.
 5. End Cap/Finish Edge Trim: Donn® Compasso™ Suspension trim; 2-1/4" High, 4" High, 6" High, 8" High, 10" High, 12" High. [Delete if not used]
 6. Wire: Hanger Wire (12 ga.), galvanized or as noted on drawings
- B. Donn® Brand GridWare™ Suspension System - Commercial quality, cold-rolled steel, finished painted. System can be used with Donn® Brand WireWorks™ and/or WireWorks™ Forms open-cell wire panels or left empty. If left empty grid can be configured in 2' x 2', 2' x 4', 4' x 4', or any combinations.
 1. Donn® Brand WireWorks™ Cells open-cell wire 24" x 24" panels- Commercial quality, 1/8" wire grate steel, and finish paint color (High-Gloss White), (Chrome), (Flat White), (Flat Black), (Silver Satin), (High-Gloss Red), (High-Gloss Black) or (custom colors). Installed into and compatible with Donn® Brand GridWare™ 2' x 2' Suspension System only.
 - a. WireWorks™ Ceils Panels (open-cell wire grate): (1" x 1" Cells), (2" x 2" Cells), (3" x 3" Cells), or (4" x 4" Cells).
- C. Donn® Brand WireWorks™ open-cell wire panels - Commercial quality.
 1. Donn® Brand WireWorks™ Forms open-cell wire 24" x 24" panels - Commercial quality, 3/16" articulated wire grate steel, and finish paint color (High-Gloss White), (Chrome), (Flat White), (Flat Black), (Silver Satin), (High-Gloss Red), (High-Gloss Black) or (custom colors). Installed into and compatible with Donn® Brand GridWare™ Suspension System only. Panels (open-cell articulated wire grate): Weave 3/8" articulation), (Ripple 3/8" articulation), (Small Wave 2" articulation), or (Big Wave 6" articulation).
- D. Donn® Brand WireWorks™ Forms open-cell wire 24" x 24" panels.
- E. Donn® Brand WireWorks™ Woven open-cell wire 2' x 2' panels - Commercial quality, varied size woven steel wires, and finish paint color (High-Gloss White), (Chrome), (Flat White), (Flat Black), (Silver Satin), (High-Gloss Red), (High-Gloss Black) or (custom colors). Installed into and compatible with Donn Brand GridWare Suspension System only.

APPLICATION GUIDE SPECIFICATIONS

PART 3 EXECUTION

3.1 Examination	A. Examine substrates and adjoining construction and conditions under which Work is to be installed. Do not proceed with work until unsatisfactory conditions are corrected.
3.2 General Installation Requirements	A. Standard reference: Install grid members in accordance with ASTM C636, Cisca installation standards, and other applicable references. B. Manufacturer's reference: Install in accordance with manufacturer's current printed recommendations. C. Drawing reference: Install in accordance with approved shop drawings and locate ceiling in accordance with main tee dimensions relative to elevations. D. Install in accordance with reference standards and manufacturer's instructions.
3.3 Application Installation Requirements	A. Lay-In Ceiling Applications: 1. Lay-out ceiling area as indicated on reflected ceiling plan before any installation. 2. Hanger Wire Installation: Secure hanger wires to upper structural elements and space hangers so that each hanger wire supports a maximum of 16 sq. ft. Lay-out as reflected and dimensioned in reflected ceiling plan. 3. Space main tee members a maximum span of 48" on center. 4. Space cross tees as reflected on reflected ceiling plan, usually 24" and/or 48". 5. Install bracing wires to suspension members and to supports without attachment to metal formwork, steel decks or steel deck tabs. 6. Install trim, and similar accessories as necessary and as applicable to meet project requirements where indicated on drawings. 7. Install wearing soft gloves to reduce transfer of oil to finished framing members. 8. Install mains and tees as to align joints in a straight parallel/perpendicular fashion as indicated on reflected ceiling plan. Fit all joints tight and flush. 9. If cross tee's chromate clips are to be field painted, paint after installed but before panel installation. 10. If installation of grid is not wall to wall, but free style, install trim before panels. 11. If grid is terminated at walls or not complete 24" moduls, care should be taken as panles have cutting limitations. 12. Trim WireWorks™ Cell panels and Forms Weave panels as needed with hacksaw or linesman's pliers. Forms Ripple, Small Wave and Big Waves can only be cut parallel to the inner design wires, NOT perpendicular. 13. Install panels by dropping down into grid frame from above. 14. Remove all manufacture applied temporay protective coverings, clean and touchup minor finish damage. If parts were damaged, remove and replace as needed. 15. Upon completion, clean all exposed sufaces of decorative suspension grid including trims and edge molding.

Technical Service

800 USG.4YOU

Website

usg.com

Samples/Literature E-mail

samplit@usg.com

866 528.7089

Customer Service

800 950.3839

PRODUCT INFORMATION

Data Page: IC325

See usg.com or cgcinc.com for the most up-to-date product information.

INSTALLATION

Must be installed in compliance with ASTM C636, ASTM E580, CISCA and standard industry practices, within all applicable code requirements. Alternative assemblies and installation methods may be utilized when approved by the authority having jurisdiction. USG recommends checking with the authority having jurisdiction prior to designing and installing a suspended ceiling system.

CODE COMPLIANCE

The information presented is correct to the best of our knowledge at the date of issuance. Because codes continue to evolve, check with a local official prior to designing and installing a ceiling system. Other restrictions and exemptions may apply.

NOTICE

We shall not be liable for incidental and consequential damages, directly or indirectly sustained, nor for any loss caused by application of these goods not in accordance with current printed instructions or for other than the intended use. Our liability is expressly limited to replacement of defective goods. Any claim shall be deemed waived unless made in writing to us within thirty (30) days from date it was or reasonably should have been discovered.

COLOR VARIATIONS

Some commercially acceptable color variation may occur between lots and between different size canopies of the same color.

SEISMIC APPLICATIONS

Refer to Seismic Technical Guide, Specialty Decorative Ceilings (SC2494) for more information on architectural components.

SAFETY FIRST!

Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

WARRANTY

One (1) year limited warranty. See USG Ceilings Commercial Application Warranty (SC2102) for additional details. For Canadian product needs, please contact your local sales representative.

TRADEMARK

The trademarks USG, CGC, COMPASSO, CURVATURA, DONN, DX, GRIDWARE, WIREWORKS, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

IC34103/rev 4-23

© 2023, USG Corporation or its affiliates.
All rights reserved.

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661