

Manual "Fresh Air" Curb-Mounted Skylight

As a venting skylight, the Manual "Fresh Air" Curb-Mounted Skylight opens for maximum daylight and fresh air to contribute to your home's proper moisture balance and comfort level. Your installer will build a curb on the roof which holds the skylight and ensures leak-free protection from rain and snow. It can easily open and close with a control rod when installed out-of-reach or with a smooth turning handle for those installed within reach.

Ideal Applications:
In reach [lofts](#) and [bonus rooms](#) that can greatly benefit from natural ventilation.



FEATURES & BENEFITS

- Easily open and close skylight by hand with a smooth turning handle for in-reach applications or a rod for out-of-reach ones
- Equipped with insect screen to prevent pests
- Seamlessly pairs with any VELUX solar shades for optimal light control — select shades can be pre-installed for free
- Flashing kit required for [No Leak Warranty](#)
- Eligible for Federal Solar Tax Credit* with the addition of Solar Shades

PRODUCT DETAILS

- **Laminated LoE3 Glass:** double-paned argon-gas-filled LoE3 glass that provides excellent energy performance for year round comfort. Plus, it includes the added safety of laminated glass, which building codes require for out-of-reach applications.
- **No Leak Warranty** - 10-year installation warranty, plus 20 years on glass, 10 years on product, and 5 years on shades and controls.
- Insect Screen
- 10 year hail with Clean, Quiet & Safe glass

OPTIONAL SKYLIGHT UPGRADES


- Impact Glass
- Snowload Glass
- White Laminated Glass

ACCESSORIES


- Factory pre-installed Room-Darkening or Light Filtering shades
- Telescopic Rod 3'-6' or 6'-10'
- Crank Handle




Manual "Fresh Air" Curb-Mounted Skylight

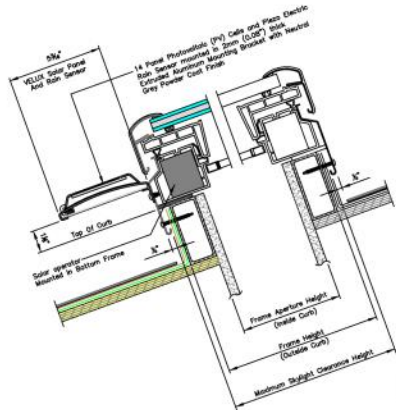

VERTICAL CROSS SECTION

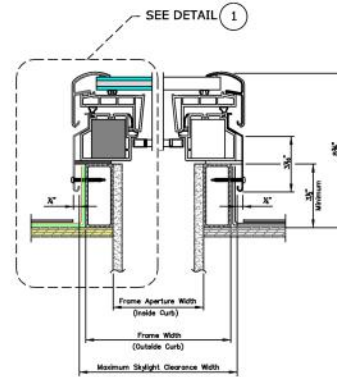

HORIZONTAL CROSS SECTION

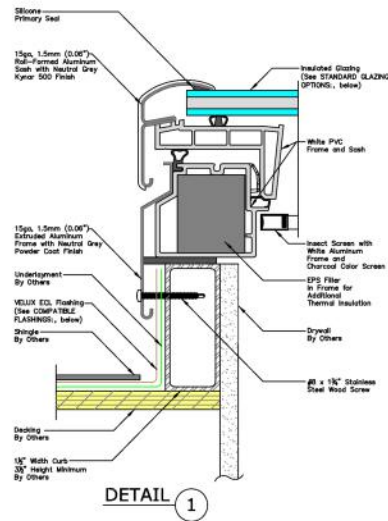

DETAIL 1

COMPLIANCE AND CERTIFICATIONS

- DBPR Florida
- IAPMO
- NFRC, National Fenestration Rating Council
- Energy Star
- WDMA, Window & Door Manufacturing Association

		2222	2234	2246	3030	3046	3434	4622*	4646
Frame Width	(W-in.)	25 1/2	25 1/2	25 1/2	33 1/2	33 1/2	37 1/2	49 1/2	49 1/2
Frame Height	(H-in.)	25 1/2	37 1/2	49 1/2	33 1/2	49 1/2	34 1/2	25 1/2	46 1/2
Daylight Area	(Sq. Feet)	2.58	4.20	5.92	5.27	8.29	6.89	7.27	13.13

* 4622 is only available in VCM