

VS

Manual "Fresh Air" Deck-Mounted Skylight

The VELUX Manual "Fresh Air" Deck-Mounted Skylight opens to allow both fresh air and sunlight in, contributing to your home's proper moisture balance and overall comfort level. Easily opened and closed with VELUX control rods when installed out-of-reach. A smooth turning handle is available when skylights are installed within reach.

Ideal Applications:
In reach [lofts](#) and [bonus rooms](#) that can greatly benefit from natural ventilation.

Eligible for a
Federal Solar Tax Credit
off product and installation



FEATURES & BENEFITS

- Easily open and close skylight by hand with a smooth turning handle for in-reach applications or a rod for out-of-reach ones
- Equipped with insect screen to prevent pests
- Seamlessly pairs with any VELUX solar shades for optimal light control — select shades can be pre-installed for free
- Flashing kit required for [No Leak Warranty](#)
- Eligible for Federal Solar Tax Credit* with the addition of Solar Shades

PRODUCT DETAILS

- **Laminated LoE3 Glass:** Laminated LoE3 Glass double-paned argon-gas-filled LoE3 glass that provides excellent energy performance for year round comfort. Plus, it includes the added safety of laminated glass, which building codes require for out-of-reach applications.
- [No Leak Warranty](#) - 10-year installation warranty, plus 20 years on glass, 10 years on product, and 5 years on shades and controls.
- Insect Screen
- Pre-finished white painted frames
- 10 year hail with Clean, Quiet & Safe glass

OPTIONAL SKYLIGHT UPGRADES




- Impact Glass
- Snowload Glass
- Copper Cladding
- Stain Grade Wood Interior

ACCESSORIES

- Factory pre-installed Room-Darkening or Light Filtering shades
- Telescopic Rod 3'-6' or 6'-10'
- Crank Handle



Manual "Fresh Air" Deck-Mounted Skylight

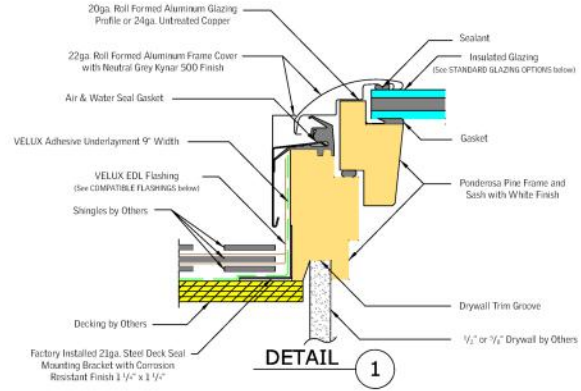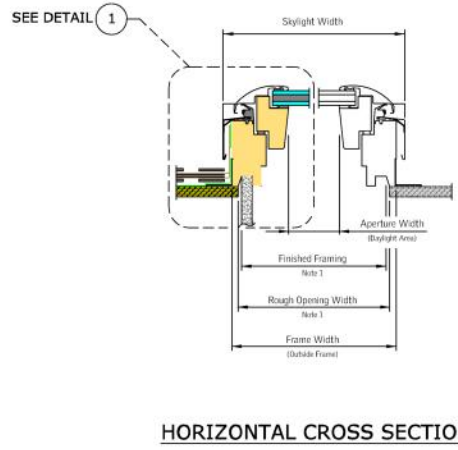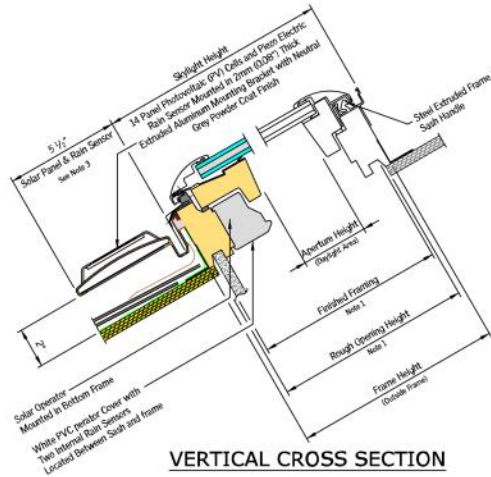

COMPLIANCE AND CERTIFICATIONS

- DBPR Florida
- IAPMO
- NFRC, National Fenestration Rating Council
- Energy Star
- WDMA, Window & Door Manufacturing Association

		C01	C04	C06	C08	M02	M04	M06	M08	S01	S06
Rough Opening Width	(W-in.)	21	21	21	21	30 1/16	30 1/16	30 1/16	30 1/16	44 1/4	44 1/4
Rough Opening Height	(H-in.)	26 7/8	37 7/8	45 3/4	54 7/16	30	37 7/8	45 3/4	54 7/16	26 7/8	45 3/4
Daylight Area	(Sq. Feet)	2.27	3.50	4.38	5.34	4.11	5.48	6.86	8.36	5.57	10.73