





60-MIL THICK TPO,
UNIVERSAL CORNERS CAN
BE USED FOR 3 DIFFERENT
CORNER CONDITIONS AS
SHOWN BELOW

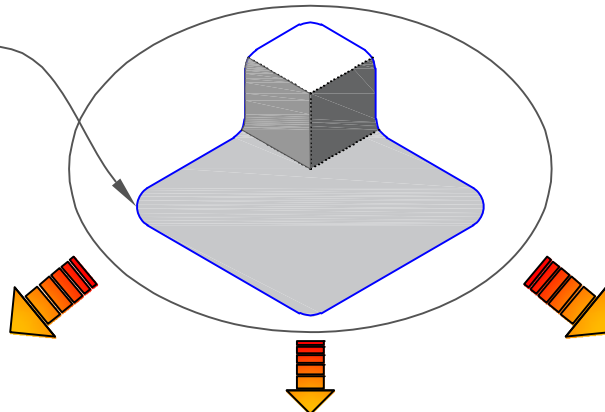

OPTION A


OPTION B

OPTION C

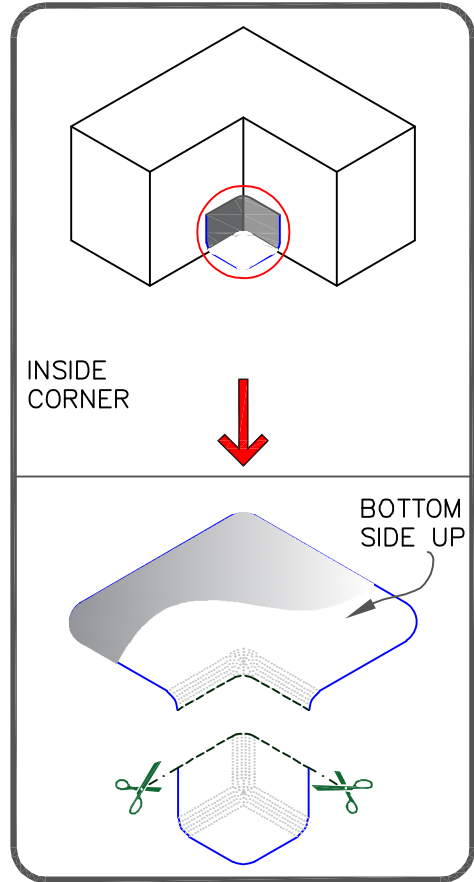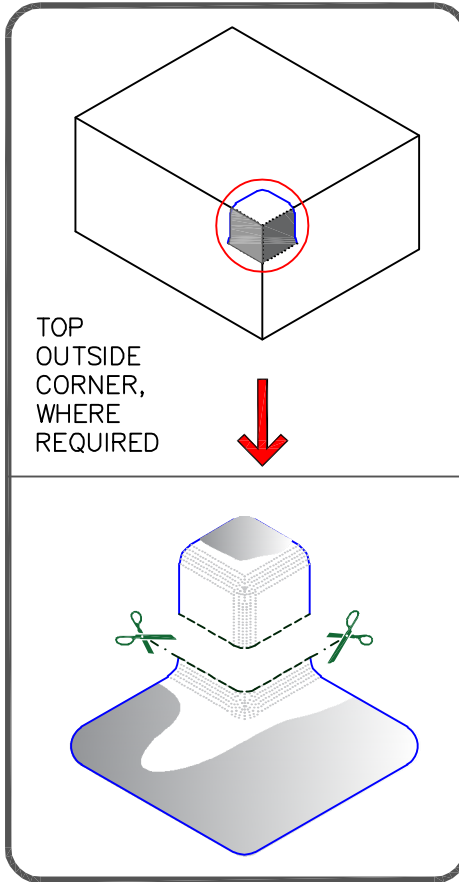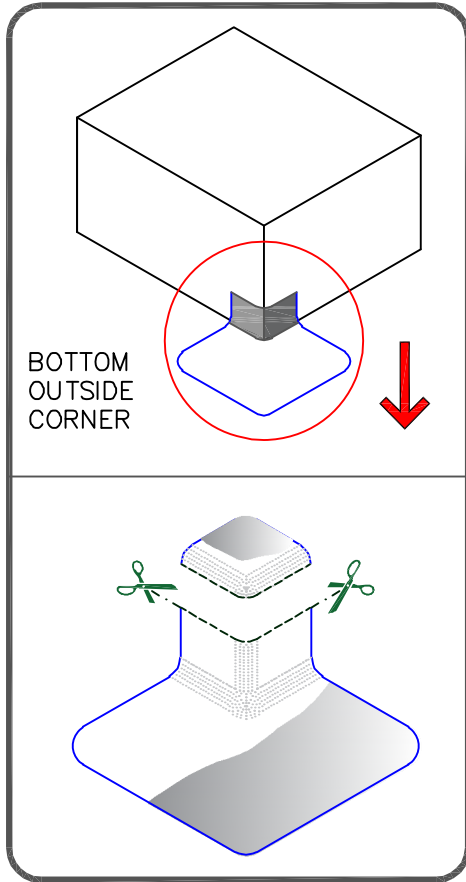

NOTES:

1. ROOF SYSTEMS MUST NOT HAVE FIELD FABRICATED OR BUILT-IN CANT STRIP.
2. REFER TO TECHNICAL DATA BULLETINS FOR COLOR AVAILABILITY.

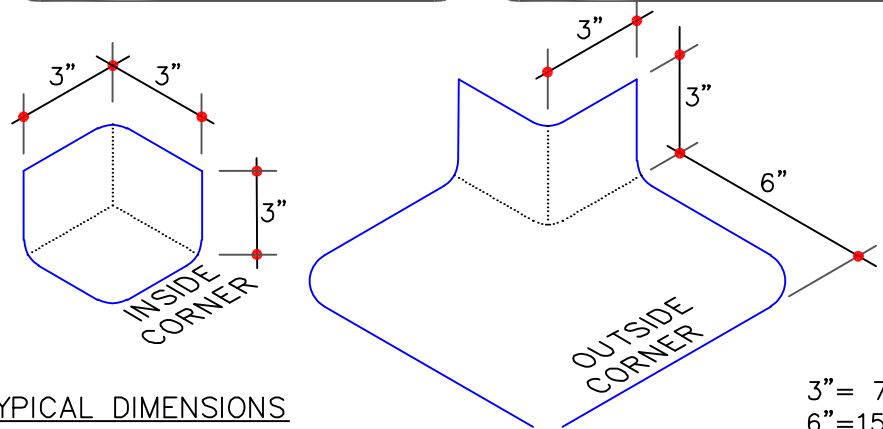

TYPICAL DIMENSIONS

3" = 7.5cm
6" = 15cm



TPO UNIVERSAL CORNERS—COMBINATION
INSIDE & OUTSIDE CORNERS
MAXIMUM WARRANTY: 30 YEARS

— TPO MEMBRANE
— APPROVED SUBSTRATE
0 — SEE NOTE
PS (PRESSURE SENSITIVE)
P&S (PEEL & STICK)
QA (QUICK APPLIED)

THERMOPLASTIC ROOFING SYSTEM
TPC-15.7