


## **SUBMITTAL SHEET**

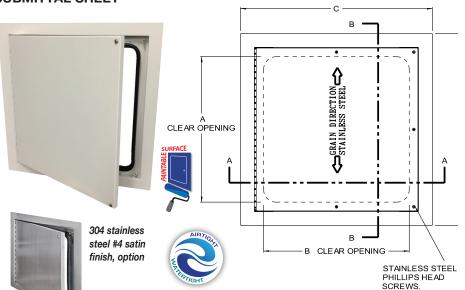

## FRONT ELEVATION

## SPECIFICATIONS:

Door & Trim: 16 ga. steel

Finish: 5 stage iron phosphate with prime coat of white alkyd baking enamel, paintable surface

Latch: Stainless Steel phillips head screws standard

Hinge: Continuous exposed stainless steel piano hinge

Air infiltration: less than 0.01 cfm/sq foot-

ASTM E 283


Water Penetration: no leakage at 15.05 psf-ASTM E

Gasket: Continuous Bulb trim Gasket

## **OPTIONS** (at additional cost)

- ☐ Type 304 stainless steel with a #4 satin finish
- ☐ Stainless Steel allen head screws
- ☐ Stainless Steel philips head screws

~	Model No.	Door Size W x H	Wall Opening W x H	Ship Wt. Lbs.
	ADWT	12 x 12	12 3/8 x 12 3/8	8
	ADWT	14 x 14	14 3/8 x 14 3/8	12
	ADWT	18 x 18	18 3/8 x 18 3/8	15
	ADWT	24 x 24	24 3/8 x 24 3/8	22
	ADWT	30 x 30	30 3/8 x 30 3/8	32
	ADWT	30 x 48	30 3/8 x 48 3/8	44

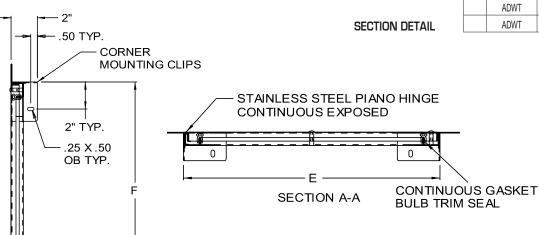

The WB ADWT is a flush access door that has been tested for air infiltration and water penetration. The Door and frame are fully welded and gasketed. This access door is ideal for use in laboratories, clean rooms, operating rooms, etc. where an airtight/watertight seal is required.

\*This product is the proprietary property of Acudor Products. It is sold and distributed by The Williams Brothers Corporation of America with proper authorization.

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • **WWW.Wbdoors.com** 



