

SPECIFICATIONS:

Door & Trim: 16 ga. steel, Trim 1 1/2" wide Finish: 5 stage iron phosphate with prime coat of white alkyd baking enamel, paintable surface Latch: Stainless Steel phillips head screws standard

Hinge: Continuous stainless steel piano hinge Air Infiltration: less than 0.01 cfm/sq foot-

Water Penetration: No leakage at 15.05 psf-ASTM E


Gasket: Continuous bulb trim gasket

OPTIONS (at additional cost)

- ☐ Type 304 stainless steel with a #4 satin finish
- ☐ Stainless Steel allen head screws

~	Model No.	Door Size W x H	Wall Opening W x H	Ship Wt. Lbs.
	ADWT	8 x 8	8 5/16 x 8 5/16	10
	ADWT	12 x 12	12 5/16 x 12 5/16	12
	ADWT	14 x 14	14 5/16 x 14 5/16	13
	ADWT	16 x 16	16 5/16 x 16 5/16	14
	ADWT	18 x 18	18 5/16 x 18 5/16	15
	ADWT	24 x 24	24 5/16 x 24 5/16	21
	ADWT	24 x 36	24 5/16 x 36 5/16	30
	ADWT	30 x 30	30 5/16 x 30 5/16	30
	ADWT	30 x 48	30 5/16 x 48 5/16	31
	ADWT	36 x 48	36 5/16 x 48 5/16	49

- 1. When a door increases in size, more cams are added for security
- 2. For requests on clear opening after door installed, please email info@ wbdoors.com
- 3. All installation holes must be used for proper door functionality and security
- 4. For custom sizes, please reach out to info@wbdoors.com
- 5. Clear opening may be impeded by structural or functional parts on door
- 6. Drawings of any door can be requested through info@wbdoors.com

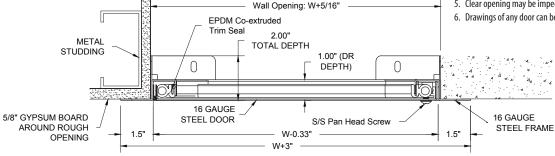

W-0.33"

W+3"

The WB ADWT is a flush access door that has been tested for air infiltration and water penetration. The Door and frame are fully welded and gasketed. This access door is ideal for use in laboratories, clean rooms, operating rooms, etc. where an airtight/watertight seal is required.

Project:		Date:	
Contractor:	Architect:		
Sizes:	Quantity:	App Initials:	

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • **WWW.Whdoors.com**



SECTION DETAIL

