

SUBMITTAL SHEET

WALLS & CEILINGS **EXPANDED METAL CASING BEAD** 1/4" SAFETY **EDGE**

FRONT ELEVATION

SPECIFICATIONS:

Door: 14 ga. steel. Door is recessed 1" and lined with expanded metal lath

Trim: 16 ga. steel with 24 ga.

galvanized plaster bead and expanded metal lath

Finish: White baked enamel, paintable surface


Latches: Flush, stainless steel cam latch

Hinge: Continuous stainless steel hinge opens 180°

OPTIONS (at additional cost)

- Key-operated medium barrel cylinder lock
- ☐ Weather resistive neoprene gasket all 4 sides (Closed cell sponge, blend of Neoprene/EPDM/SBR. Meets ASTM D-1056: SCE 41, RE 41, 2A1; substrate UL 94HF-1 recognized.)
- Special sizes available

SECTION DETAIL

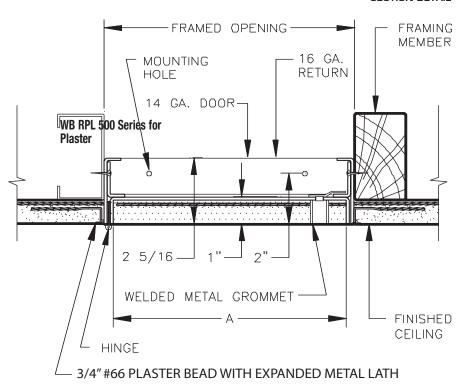

Model No.	Door Size W x H	Wall Opening	Cam Latch	Ship Wt. Lbs.
AP 510	8 x 8	8 1/4 x 8 1/4	1	7
AP 510	10 x 10	10 1/4 x 10 1/4	1	8
AP 510	12 x 12	12 1/4 x 12 1/4	3	10
AP 510	12 x 24	12 1/4 x 24 1/4	3	16
AP 510	14 x 14	14 1/4 x 14 1/4	3	11
AP 510	16 x 16	16 1/4 x 16 1/4	3	14
AP 510	18 x 18	18 1/4 x 18 1/4	3	15
AP 510	20 x 20	20 1/4 x 20 1/4	3	18
AP 510	22 x 22	22 1/4 x 22 1/4	4	21
AP 510	22 x 30	22 1/4 x 30 1/4	4	27
AP 510	22 x 36	22 1/4 x 36 1/4	5	30
AP 510	24 x 24	24 1/4 x 24 1/4	4	28
AP 510	24 x 36	24 1/4 x 36 1/4	5	38
AP 510	24 x 48**	24 1/4 x 48 1/4	6	40
AP 510	30 x 30**	30 1/4 x 30 1/4	5	32
AP 510	30 x 36**	30 1/4 x 36 1/4	5	34
AP 510	36 x 36**	36 1/4 x 36 1/4	7	45

* Available upon request

** Walls only

A precision door that provides a virtually concealed installation, keeping acoustical surfaces intact while contributing to sound control and better appearance. Door panels are recessed to receive plaster up to I" thick. Plaster covering the door finishes flush with the surrounding field, leaving only the narrow frame edges exposed.

Project:_ Date: Sizes: _ Quantity:____ App Initials:

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • **www.wbdoors.com**

RELATED PRODUCTS

WB RPL 500 Series for Plaster





