


SUBMITTAL SHEET

WALLS & CEILINGS




3 point catch on 18 x 18 and above

T-Handle and keys



Gasketing

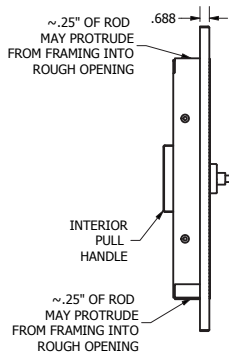

Durability: Taber Abrasion Tested – Withstood 4,550 cycles (ASTM D4060) with a wear index of 91.1 for long-lasting finish.

Corrosion Resistance: Salt Spray Tested – Withstood 48 hours of ASTM B117 exposure with only slight edge rusting, demonstrating excellent resistance to harsh environments.

UV Resistance: Tested to ASTM G155 & G154 standards – Withstood 48 hours of continuous UV exposure with negligible visual change, ensuring color and finish durability in sunlit environments.



SPECIFICATIONS:

Door: 16 ga. steel

Trim: 16 ga. steel

Finish: Galvannealed steel. Primed white baked enamel, paintable surface

Latches: Chrome plated “T” type handle with pivot rod 1 point catch. (3 point catch on 18 x 18 and above). Key cylinder lock. **Opens with the outside handle only. No interior release.**

Hinges: Continuous piano hinge

Insulation: Double layer of 1” GreenGuard® Extruded Polystyrene insulation board, with R-Value @ 75°F Mean 5.0 x 2, FM approved*

Gasket: Double seal gasketing

Application: For exterior purposes, weather resistive

Durability: Taber Abrasion Tested – Withstood 4,550 cycles (ASTM D4060) with a wear index of 91.1 for long-lasting finish.

Corrosion Resistance: Salt Spray Tested – Withstood 48 hours of ASTM B117 exposure with only slight edge rusting, demonstrating excellent resistance to harsh environments.

UV Resistance: Tested to ASTM G155 & G154 standards – Withstood 48 hours of continuous UV exposure with negligible visual change, ensuring color and finish durability in sunlit environments.

OPTIONS (at additional cost)


☐ Special sizes available

☐ _____

Clear opening of door is 2” inches smaller than door size.

✓	Model No.	Door Size W x H	Wall Opening *	Clear Opening W x H	Ship Wt. Lbs.
	EXT 1300	12 x 12	12 1/4 x 12 1/4	10 x 10	27
	EXT 1300	14 x 14	14 1/4 x 14 1/4	12 x 12	30
	EXT 1300	16 x 16	16 1/4 x 16 1/4	14 x 14	35
	EXT 1300	18 x 18	18 1/4 x 18 1/4	16 x 16	40
	EXT 1300	20 x 20	20 1/4 x 20 1/4	18 x 18	42
	EXT 1300	20 x 30	20 1/4 x 30 1/4	18 x 28	44
	EXT 1300	22 x 22	22 1/4 x 22 1/4	20 x 20	44
	EXT 1300	22 x 30	22 1/4 x 30 1/4	20 x 28	45
	EXT 1300	22 x 36	22 1/4 x 36 1/4	20 x 34	50
	EXT 1300	24 x 24	24 1/4 x 24 1/4	22 x 22	55
	EXT 1300	24 x 30	24 1/4 x 30 1/4	22 x 28	60
	EXT 1300	24 x 36	24 1/4 x 36 1/4	22 x 34	67
	EXT 1300	24 x 48	24 1/4 x 48 1/4	22 x 46	100
	EXT 1300	30 x 30	30 1/4 x 30 1/4	28 x 28	65
	EXT 1300	30 x 36	30 1/4 x 36 1/4	28 x 34	79
	EXT 1300	30 x 48	30 1/4 x 48 1/4	28 x 46	85
	EXT 1300	36 x 36	36 1/4 x 36 1/4	34 x 34	90
	EXT 1300	36 x 48	36 1/4 x 48 1/4	34 x 46	165

SECTION DETAIL

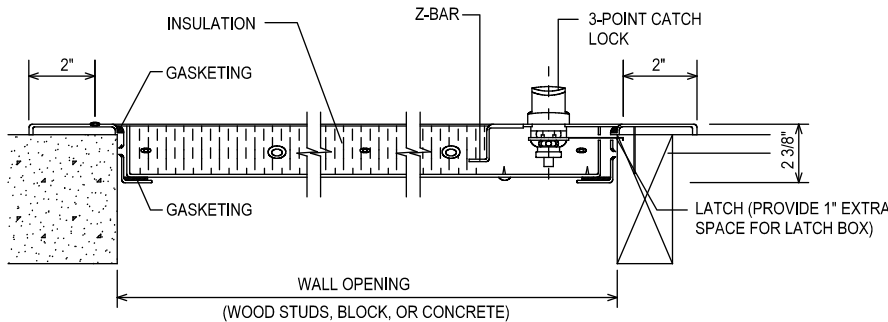

The one of a kind exterior access door is galvannealed** steel, insulated with 1” GreenGuard and includes double seal gasketing. Weather resistive gasket on inside for outdoor applications (certain saltwater areas might not be compatible).

1. When a door increases in size, more cams are added for security
2. For requests on clear opening after door installed, please email info@wbdoors.com
3. All installation holes must be used for proper door functionality and security
4. For custom sizes, please reach out to info@wbdoors.com
5. Clear opening may be impeded by structural or functional parts on door
6. Drawings of any door can be requested through info@wbdoors.com

Project: _____ Date: _____

Contractor: _____ Architect: _____

Sizes: _____ Quantity: _____ App Initials: _____

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • www.wbdoors.com



The World's Largest Access Door Store.™

