




SUBMITTAL SHEET

WALLS & CEILINGS

FRONT ELEVATION

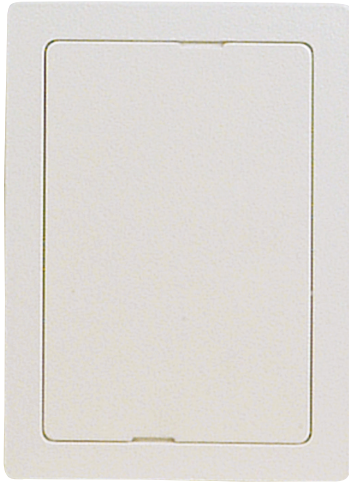

SECTION DETAIL

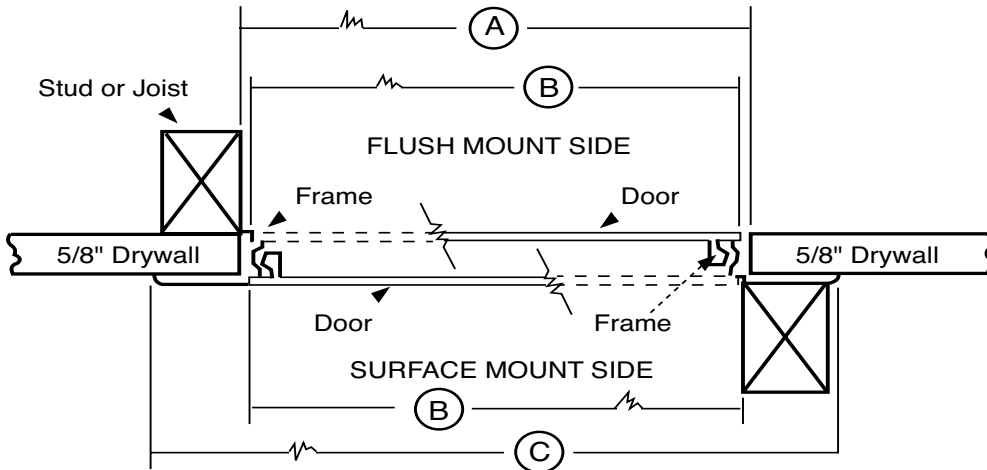

SPECIFICATIONS:

Door and Trim: High impact ABS plastic with UV stabilizers. Door to have removable panel. Door is locked to return frame with snap friction catch

Finish: White textured finish, **paintable surface**

Installation: Door is easily installed by applying adhesive caulking to the back of the frame and pressing into place.

Knockouts: For plumbing and electrical applications the door has designated drill points and knockouts for easy wiring installation

Tile Applications: Door is tile-able, use flexible adhesive and grout. Adjust frame height to finished wall

✓	Model No.	Door Size W x H	Wall Opening	Frame Size to Outer Flange
	MAP 1800	4 x 6	4 3/8 x 6 3/8	5 1/4 x 7 1/4
	MAP 1800	6 x 9	6 3/8 x 9 3/8	8 1/4 x 11 1/4
	MAP 1800	8 x 8	8 3/8 x 8 3/8	10 1/4 x 10 1/4
	MAP 1800	12 x 12	12 3/8 x 12 3/8	14 1/4 x 14 1/4
	MAP 1800	14 x 14	14 3/8 x 14 3/8	17 x 17
	MAP 1800	14 x 29	14 3/8 x 29 3/8	17 x 32 1/4

The **MAP 1800 plastic access door** is high impact ABS plastic reversible panels with UV stabilizers made with precision dies for perfect fit of door and frame. Surface is a cosmetically acceptable textured surface.

Project: _____ Date: _____
 Contractor: _____ Architect: _____
 Sizes: _____ Quantity: _____ App Initials: _____

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • www.wbdoors.com



AWCI ASSOCIATION OF THE WALL AND CEILING INDUSTRY

The World's Largest Access Door Store.™

