


SUBMITTAL SHEET


WALLS & CEILINGS



Flush, stainless steel cam latch opens with screwdriver

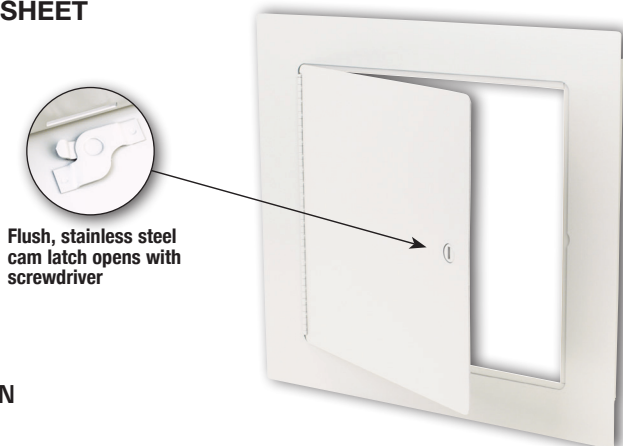

BACK ELEVATION

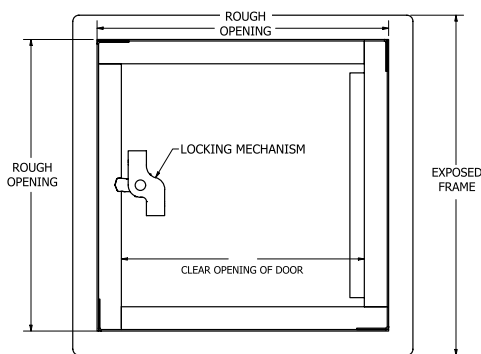

THE WILLIAMS BROTHERS ADVANTAGE


Durability: Taber Abrasion Tested - Withstood 4,550 cycles (ASTM D4060) with a wear index of 91.1 for a durable, long-lasting finish.

Corrosion Resistance: Salt Spray Tested - Withstood 48 hours of ASTM B117 exposure with only slight edge rusting, demonstrating excellent resistance to harsh environments.

UV Resistance: Tested to ASTM G155 & G154 standards - Withstood 48 hours of continuous UV exposure with negligible visual change, ensuring color stability and finish durability in sunlit environments.



SECTION DETAIL

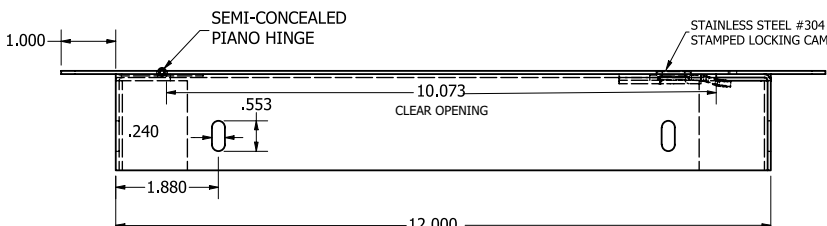

Innovative cost effective access door. 16 ga. return frame and unweld construction allows for an aesthetically pleasing appearance and square fit in all wall and ceiling applications. Laser cut from one sheet of cold rolled steel, no corner mitering - aesthetically preferred by architects and building professionals.

1. When a door increases in size, more cams are added for security in the ceiling or wall
2. For requests on clear opening after door installed, please email info@wbdoors.com
3. All installation holes must be used for proper door functionality and security
4. For custom sizes, please reach out to info@wbdoors.com
5. Clear opening may be impeded by structural or functional parts on door
6. Drawings of any door can be requested through info@wbdoors.com

Project: _____ Date: _____

Contractor: _____ Architect: _____

Sizes: _____ Quantity: _____ App Initials: _____

1330 Progress Drive • Front Royal, VA 22630 • Phone: 1-800-255-5515 • www.wbdoors.com

SPECIFICATIONS:

Door: 16 ga. steel. Trim being 1-3/4" wide with radius corners

Trim: 16 ga. steel having a depth of 1-3/4"

Finish: Primed white baked enamel, **paintable surface**

Latches: Flush, stainless steel cam latch

Hinge: Full length semi-concealed piano hinge opens 165°.

OPTIONS (at additional cost)

- ☐ Stainless Steel Type 304
- ☐ Stainless Steel Type 316 No. 4 Satin Finish Brushed
- ☐ WB Key Cylinder Locks - keyed alike 2 keys per door
- ☐ Custom colors
- ☐ Mortise lock and locks by others
- ☐ Neoprene gasket all 3 sides
- ☐ Special sizes available
- ☐ _____

Clear opening of door is 2" inches smaller than door size.

✓	Model No.	Door Size W x H	Wall Opening	Clear Opening W x H	Cam Latches	Ship Wt. Lbs.
	UAD 200	6 x 6	6 1/4 x 6 1/4	4 x 4	1	4
	UAD 200	8 x 8	8 1/4 x 8 1/4	6 x 6	1	5
	UAD 200	8 x 12	8 1/4 x 12 1/4	6 x 10	1	6
	UAD 200	8 x 16	8 1/4 x 16 1/4	6 x 14	3	8
	UAD 200	10 x 10	10 1/4 x 10 1/4	8 x 8	1	6
	UAD 200	12 x 12	12 1/4 x 12 1/4	10 x 10	1	8
	UAD 200	12 x 16	12 1/4 x 16 1/4	10 x 14	3	10
	UAD 200	12 x 18	12 1/4 x 18 1/4	10 x 16	3	11
	UAD 200	12 x 24	12 1/4 x 24 1/4	10 x 22	4	15
	UAD 200	14 x 14	14 1/4 x 14 1/4	12 x 12	3	10
	UAD 200	14 x 24	14 1/4 x 24 1/4	12 x 22	3	14
	UAD 200	16 x 16	16 1/4 x 16 1/4	14 x 14	3	13
	UAD 200	16 x 20	16 1/4 x 20 1/4	14 x 18	3	16
	UAD 200	16 x 24	16 1/4 x 24 1/4	14 x 22	4	17
	UAD 200	18 x 18	18 1/4 x 18 1/4	16 x 16	3	14
	UAD 200	18 x 24	18 1/4 x 24 1/4	16 x 22	4	18
	UAD 200	18 x 36	18 1/4 x 36 1/4	16 x 34	4	29
	UAD 200	20 x 20	20 1/4 x 20 1/4	18 x 18	3	17
	UAD 200	20 x 24	20 1/4 x 24 1/4	18 x 22	4	21
	UAD 200	20 x 30	20 1/4 x 30 1/4	18 x 28	4	23
	UAD 200	22 x 22	22 1/4 x 22 1/4	20 x 20	4	22
	UAD 200	22 x 24	22 1/4 x 24 1/4	20 x 22	4	23
	UAD 200	22 x 30	22 1/4 x 30 1/4	20 x 28	4	25
	UAD 200	22 x 36	22 1/4 x 36 1/4	20 x 34	4	32
	UAD 200	24 x 24	24 1/4 x 24 1/4	22 x 22	4	24
	UAD 200	24 x 30	24 1/4 x 30 1/4	22 x 28	4	27
	UAD 200	24 x 36	24 1/4 x 36 1/4	22 x 34	5	35
	UAD 200	24 x 48	24 1/4 x 48 1/4	22 x 46	5	43
	UAD 200	30 x 30	30 1/4 x 30 1/4	28 x 28	6	32
	UAD 200	30 x 36	30 1/4 x 36 1/4	28 x 34	6	39
	UAD 200	32 x 32	32 1/4 x 32 1/4	30 x 30	6	35
	UAD 200	36 x 36	36 1/4 x 36 1/4	34 x 34	6	44
	UAD 200	36 x 48	36 1/4 x 48 1/4	34 x 46	7	57
	UAD 200	48 x 48	48 1/4 x 48 1/4	46 x 46	9	70



The World's Largest Access Door Store.™

