


PRODUCT SUBMITTAL

WIRE-BOND


Copper Fabric Flashing(#4150)



Note: "Flashing must extend beyond the face of the wall or cut flush", Brick Institute of America, Tech Note #7

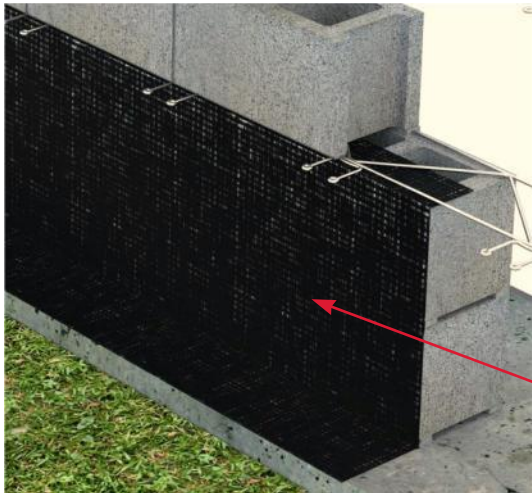

Copper Fabric Flashing

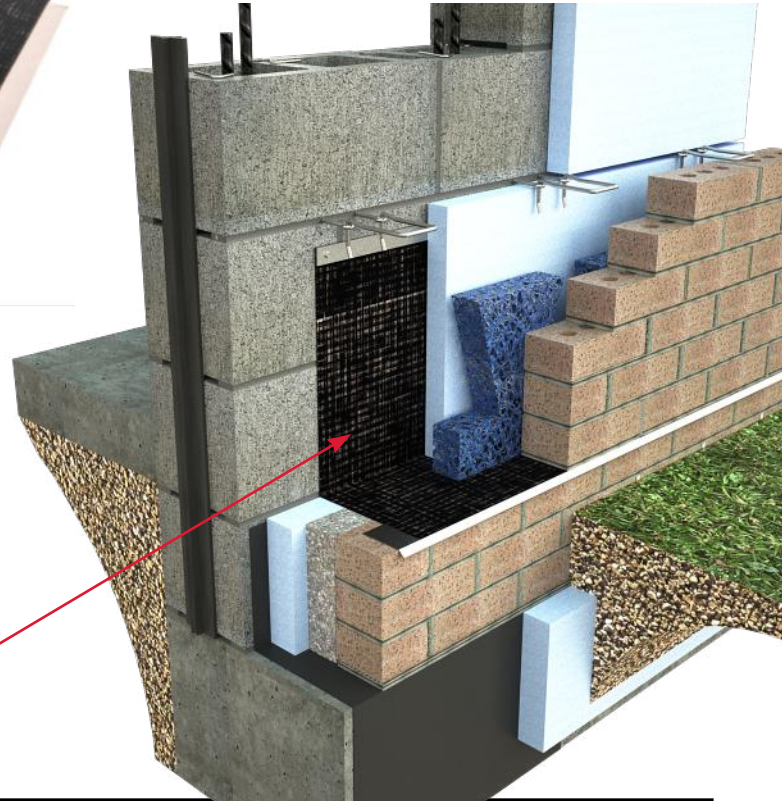

COMPOSITION / MATERIALS

WEIGHT / SIZES

Copper Fabric Flashing:

- Highest quality laminated copper flashing.
- Two layers of dense glass fabric and special blended asphalt are laminated to copper core to produce greater tensile strength and improved puncture resistance.
- Composition of copper, glass fabric and asphalt will ensure a permanent bond in the mortar joint and protection from moisture.

Copper Flashing is used in masonry construction because it does not react to any alkali or acids that may be found in mortar.

Copper sheet used in the fabrication of copper laminates conforms to ASTM B370 (110 Alloy)



Copper Weight / sq ft.

- 3 oz 5 oz 7 oz

Note: A Termination Bar is required for surface-mounted applications.

Sizes:

Standard roll widths:

- 12" 16" 18" 24" 36"

Standard roll length: 25 lineal feet.

Custom sizes available

Use WireBond Flashing Mastic when needed to seal all laps and joints.

WIRE-BOND :

- Flashing Mastic Primer

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113

WIRE-BOND

www.wirebond.com