


PRODUCT SUBMITTAL

WIRE-BOND

Copper Seal (Copper Fabric Flashing) #4140

Asphalt Free

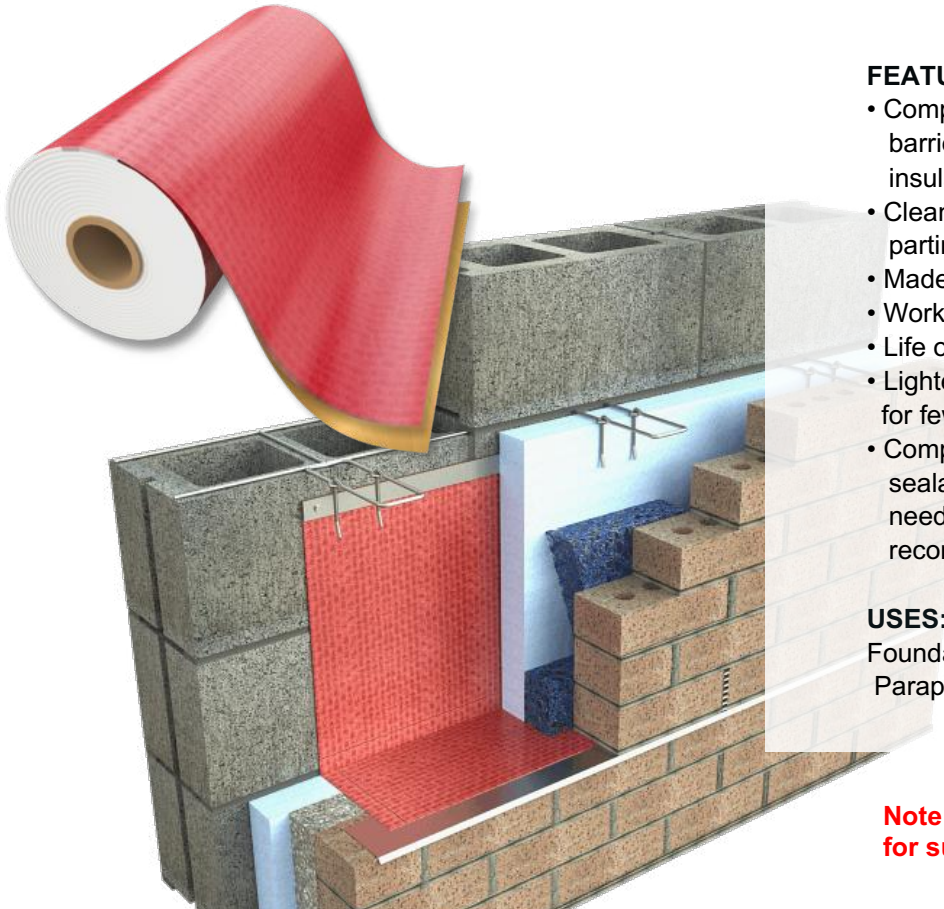

FEATURES:

- Compatible with building envelope air barriers, spray foam insulations and rigid board insulations.
- Clean and compatible - no asphalt or parting agents.
- Made of 90% recycled copper.
- Works in all temperatures (-25°F-125°F).
- Life of the wall warranty.
- Lighter weight allows longer 60-ft. rolls for fewer lap joints (40' for 7oz).
- Compatible with most caulks and sealants; no special flashing mastic needed, polyether sealants are recommended.

USES:

Foundation Sill Flashing, Cavity Wall Flashing, Parapet or Copings, Head and Sill Flashing.

Note: A Termination Bar is required for surface-mounted applications.

COMPOSITION / MATERIALS

Copper Fabric Flashing:

- Highest quality laminated copper flashing. **ASTM B370**
- 3, 5, or 7oz. copper sheet bonded with a rubber based adhesive between two layers of polymer fabric.

NOTE: DATA IS FOR 5oz ONLY

TEST METHOD

COPPER SEAL

TEST METHOD	COPPER SEAL
Puncture (PSI)	ASTM E154 780
Tensile	ASTM D412 32,000
Fire Resistant	ASTM E84 Pass (class B)
Mold Resistant	ASTM D3273 Pass
Recycled Content	90%
Recyclable Material	Yes
UV Exposure (days)	90
Warranty	Lifetime

WEIGHT / SIZES

Copper Weight / sq ft.

3 oz 5 oz 7 oz

Sizes:

Standard roll widths:

12" 18" 24"

Standard roll length:

3 oz: 60 lineal feet.

5 oz: 60 lineal feet.

7 oz: 40 lineal feet.

Use [QUIK SET Sealant](#) when needed to seal all laps and joints.



Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224

WIRE-BOND

www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113