


PRODUCT SUBMITTAL

WIRE-BOND

3404 Figure 8 Double Rebar Positioner For 8 inch CMU

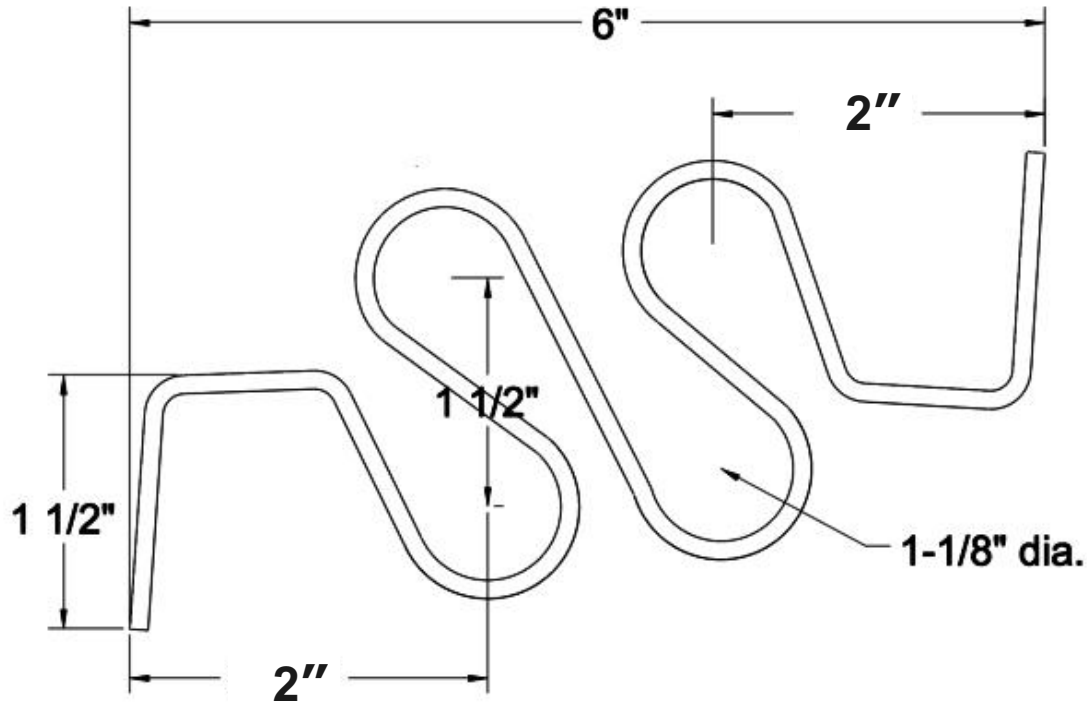

MATERIAL CONFORMANCE

Wire (Carbon Steel): Prefabricated from cold-drawn steel wire conforming to **ASTM A1064/A1064M, ASTM A82 / A82M**
Tensile Strength - 80,000 psi
Yield Point - 70,000 psi

Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 oz per sq ft)**

Hot Dip Galvanized after fabrication / Zinc Coating
ASTM A153 / A153M-B2 (1.50 oz per sq ft)

Stainless Steel (WIRE) **ASTM A580 / ASTM A580M**
Stainless Steel (SHEET METAL) **ASTM A167 Type 304**
(Type 316 available on special order)

Recycled Content:
Mill Galvanized & Hot Dipped,
82.8% Post-Consumer
17% Post Industrial / Pre-Consumer,

Stainless Steel,
60% Post Consumer
V O C Content - 0%



SIZES / FINISHES

#3404:
9 gauge dia. 6" for 8" CMU

Finish:

Mill Galvanized

Hot Dip

Stainless Steel

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224

WIRE-BOND

www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113