


# PRODUCT SUBMITTAL

WIRE-BOND

## # 3403 Figure 8 Single Rebar Positioner For 6 inch CMU

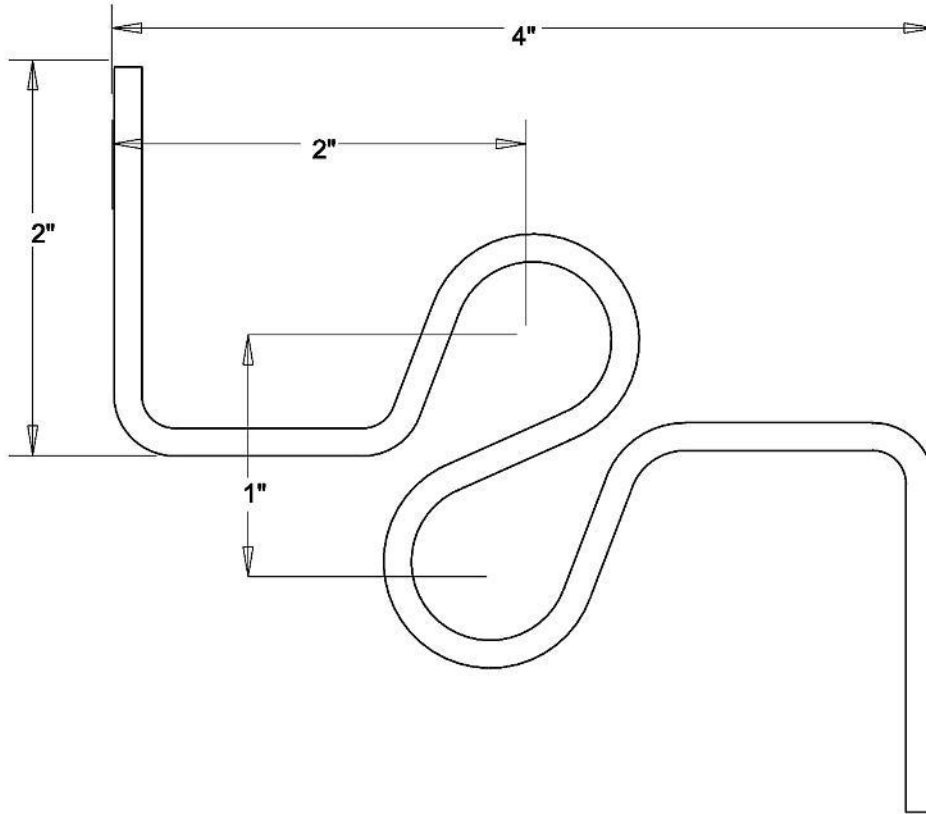

### MATERIAL CONFORMANCE

### SIZES / FINISHES

**Wire (Carbon Steel):** Prefabricated from cold-drawn steel wire conforming to **ASTM A1064/A1064M, ASTM A82 / A82M**  
Tensile Strength - 80,000 psi  
Yield Point - 70,000 psi

Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 oz per sq ft)**

Hot Dip Galvanized after fabrication / Zinc Coating  
**ASTM A153 / A153M-B2 (1.50 oz per sq ft)**

Stainless Steel (WIRE) **ASTM A580 / ASTM A580M**  
Stainless Steel ( SHEET METAL) **ASTM A167 Type 304**  
(Type 316 available on special order)



**Recycled Content:**  
Mill Galvanized & Hot Dipped,  
82.8% Post-Consumer  
17% Post Industrial / Pre-Consumer,

Stainless Steel,  
60% Post Consumer  
V O C Content - 0%

**#3403:**  
**9 gauge dia. 4" for 6" CMU**

**Finish:**

Mill Galvanized

Hot Dip

Stainless Steel

**Corporate Office:** 400 Rountree Rd Charlotte, NC 28217  
TEL: (800) 849-6722 FAX: (704) 525-3761

**Mailing Address:** P.O. Box 240988 Charlotte, NC 28224



[www.wirebond.com](http://www.wirebond.com)

**Memphis Plant:** 2365 Harbor Ave. Memphis, TN 38113  
TEL: (800) 441-8359 FAX: (901) 775-9449

**Mailing Address:** P.O. Box 13124 Memphis, TN 38113