



# PRODUCT SUBMITTAL

**WIRE-BOND**

## # 3403 Figure 8 Single Rebar Positioner For 8 inch CMU

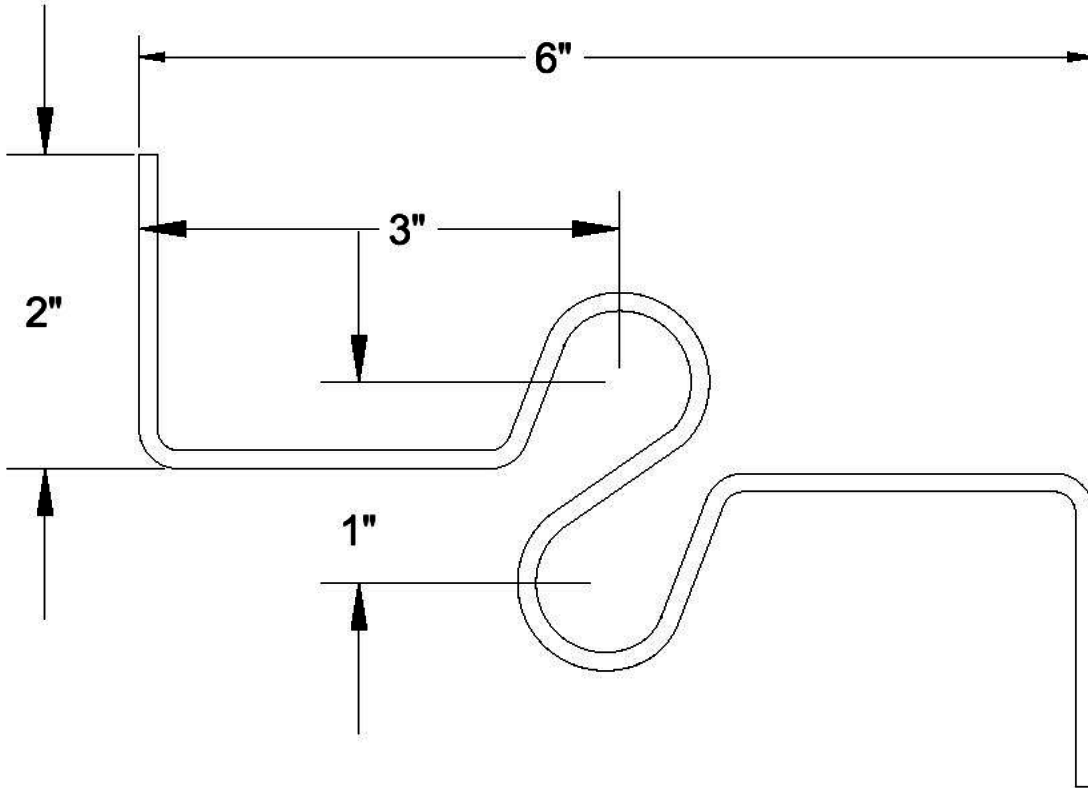

MATERIAL CONFORMANCE	SIZES / FINISHES
<p><b>Wire (Carbon Steel):</b> Prefabricated from cold-drawn steel wire conforming to <b>ASTM A1064/A1064M, ASTM A82 / A82M</b> Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p>Mill Galvanized / Zinc Coating: <b>ASTM A641 / A641M (0.10 Oz per sq ft)</b></p> <p>Hot Dip Galvanized after fabrication / Zinc Coating <b>ASTM A153 / A153M-B2 (1.50 oz per sq ft)</b></p> <p>Stainless Steel (WIRE) <b>ASTM A580 / ASTM A580M</b> Stainless Steel ( SHEET METAL) <b>ASTM A167 Type 304</b> (Type 316 available on special order)</p> <p><b>Recycled Content:</b> Mill Galvanized &amp; Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer,</p> <p>Stainless Steel, 60% Post Consumer V O C Content - 0%</p> 	<p><b>#3403:</b> <b>9 gauge dia. 6" for 8" CMU</b></p> <p><b>Finish:</b></p> <ul style="list-style-type: none"> <li>Mill Galvanized</li> <li>Hot Dip</li> <li>Stainless Steel</li> </ul>

**Corporate Office:** 400 Rountree Rd Charlotte, NC 28217  
TEL: (800) 849-6722 FAX: (704) 525-3761

**Mailing Address:** P.O. Box 240988 Charlotte, NC 28224



[www.wirebond.com](http://www.wirebond.com)

**Memphis Plant:** 2365 Harbor Ave. Memphis, TN 38113  
TEL: (800) 441-8359 FAX: (901) 775-9449

**Mailing Address:** P.O. Box 13124 Memphis, TN 38113