


# PRODUCT SUBMITTAL

**WIRE-BOND**

## # 2401 RJ-721 Adjustable Veneer Anchor

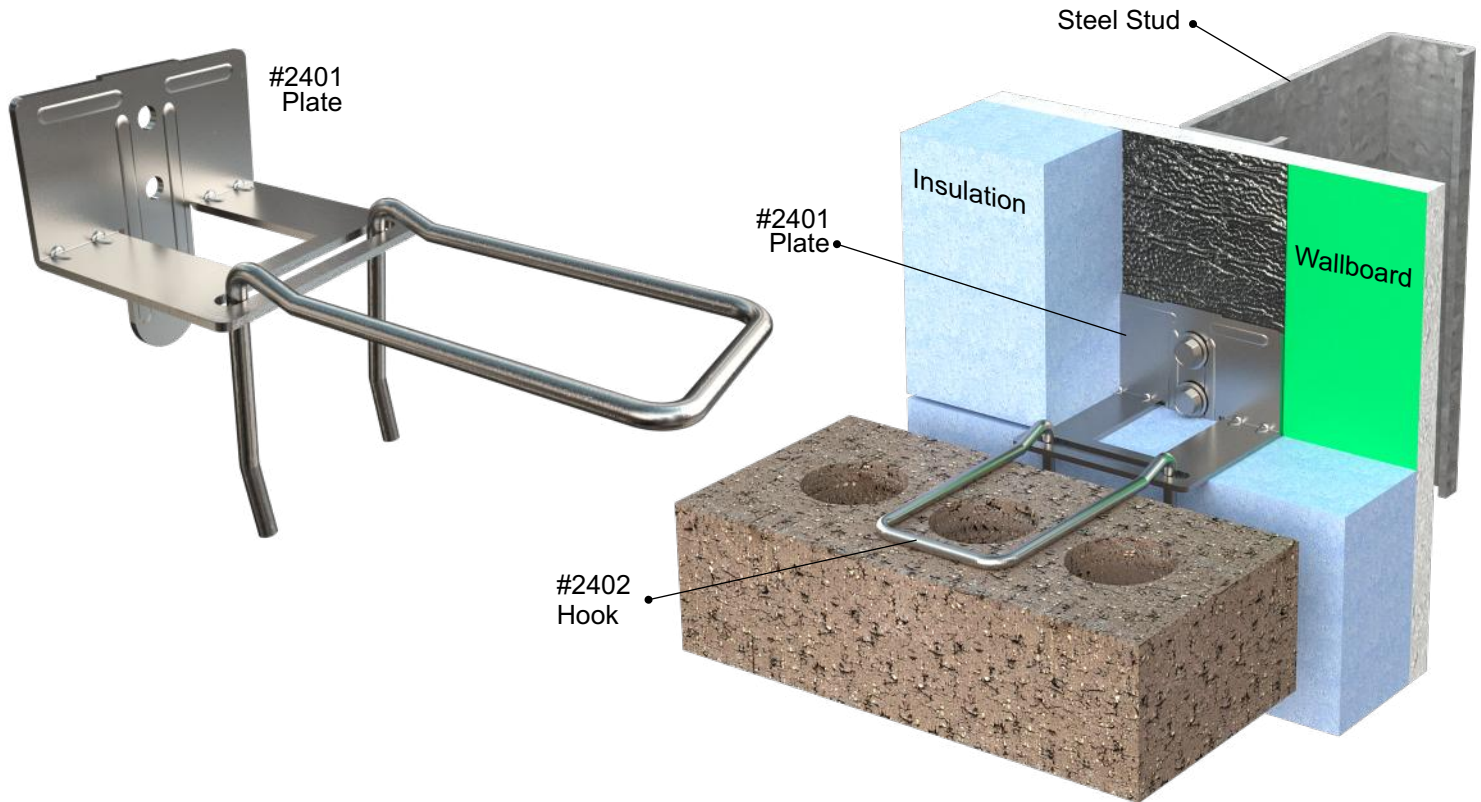

MATERIAL CONFORMANCE	SIZES / FINISHES										
<p><b>ASTM A1064/A1064M</b> - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p><b>ACI / ASCE 530</b> - (Building code requirements for masonry structures)</p> <p><b>SHEET METAL</b> - (Carbon Steel) <b>ASTM A1008 / A1008M</b> Mill Galvanized / Zinc Coating: <b>ASTM A641 / A641M (0.10 Oz per sq ft)</b> Hot Dip Galvanized after fabrication / Zinc Coating <b>ASTM A153 / A153M-B2 (1.50 oz per sq ft)</b></p> <p>Stainless Steel <b>ASTM 580 / ASTM 580M Type 304</b> (Type 316 available on special order)</p> <p><b>Recycled Content:</b> Mill Galvanized &amp; Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer,</p> <p>Stainless Steel, 60% Post Consumer V O C Content - 0%</p>	<p><b># 2401 RJ711:</b> 14 gauge      12 gauge</p> <p>Must be 3/4" more than insulation</p> <p><b>Insulation:</b></p> <table border="0"> <tr> <td>0"</td> <td>1"</td> <td>1-1/2"</td> <td>2"</td> <td>2-1/2"</td> </tr> <tr> <td>3"</td> <td>3-1/2"</td> <td>4"</td> <td></td> <td></td> </tr> </table> <p><b># 2402 Hook:</b> 3/16" Diameter Standard 3-1/4"    4-1/4"    5-1/4"    Other _____</p> <p><b>FINISH:</b> Mill Galvanized Hot Dip Galvanized Stainless Steel</p>	0"	1"	1-1/2"	2"	2-1/2"	3"	3-1/2"	4"		
0"	1"	1-1/2"	2"	2-1/2"							
3"	3-1/2"	4"									



**Corporate Office:** 400 Rountree Rd Charlotte, NC 28217  
TEL: (800) 849-6722 FAX: (704) 525-3761

**Mailing Address:** P.O. Box 240988 Charlotte, NC 28224



[www.wirebond.com](http://www.wirebond.com)

**Memphis Plant:** 2365 Harbor Ave. Memphis, TN 38113  
TEL: (800) 441-8359 FAX: (901) 775-9449

**Mailing Address:** P.O. Box 13124 Memphis, TN 38113