


PRODUCT SUBMITTAL

WIRE-BOND

2401 RJ-721 Adjustable Veneer Anchor

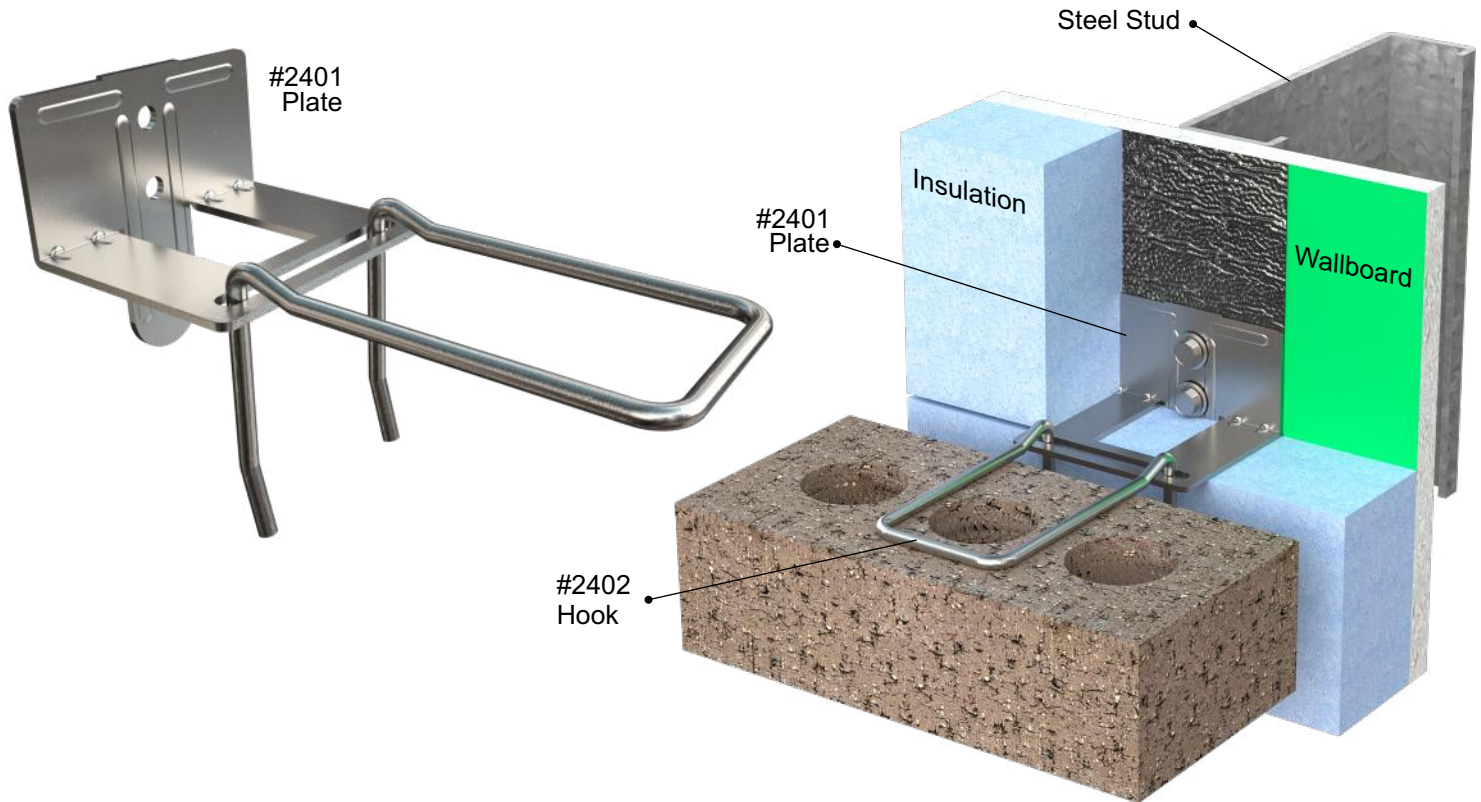

MATERIAL CONFORMANCE	SIZES / FINISHES										
<p>ASTM A82 / A82M - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p>ACI / ASCE 530 - (Building code requirements for masonry structures)</p> <p>SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 Oz per sq ft) Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft)</p> <p>Stainless Steel ASTM 580 / ASTM 580M Type 304 (Type 316 available on special order)</p> <p>Recycled Content: Mill Galvanized & Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer,</p> <p>Stainless Steel, 60% Post Consumer V O C Content - 0%</p>	<p># 2401 RJ711: 14 gauge 12 gauge</p> <p>Must be 3/4" more than insulation</p> <p>Insulation:</p> <table border="0"> <tr> <td>0"</td> <td>1"</td> <td>1-1/2"</td> <td>2"</td> <td>2-1/2"</td> </tr> <tr> <td>3"</td> <td>3-1/2"</td> <td>4"</td> <td></td> <td></td> </tr> </table> <p># 2402 Hook: 3/16" Diameter Standard 3-1/4" 4-1/4" 5-1/4" Other _____</p> <p>FINISH: Mill Galvanized Hot Dip Galvanized Stainless Steel</p>	0"	1"	1-1/2"	2"	2-1/2"	3"	3-1/2"	4"		
0"	1"	1-1/2"	2"	2-1/2"							
3"	3-1/2"	4"									



Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113