


# PRODUCT SUBMITTAL



## Wood Screw (Metal To Wood)

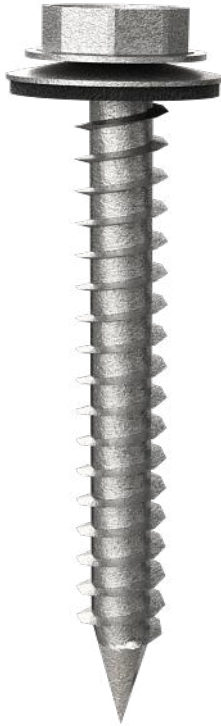

### FEATURES

- Non-walking sharp gimlet point for fast material engagement.
- Double lead thread for fast panel pick-up.
- EPDM bonded washer prevents leaks.
- Vulcanized bonding of washer eliminates separation of EPDM from the metal backing.
- High hat HWH for driving stability.
- Climaseal® finish provides excellent corrosion resistance and lower tapping torque.

### SIZES / FINISHES

#### SCREW:

- #9 x 1 1/2" with washer **Climaseal Finish**
- #9 x 2" with washer **Climaseal Finish**
- #9 x 1 1/2" with washer **Polymer Coated**
- #9 x 2" with washer **Polymer Coated**

*Thread Form*.....9-15 double lead  
*Head Style*.....1/4" HWH, 5/16" HWH  
*Washer Style*.....Galvanized (G-90)  
*Drill Point*.....Gimlet

SHEET STEEL GAUGES	
Gauge No.	Decimal Equivalent
18	.048"
20	.036"
22	.030"
24	.024"
26	.018"
28	.015"
30	.012"

Fastener Dia.	PULLOUT VALUES IN STEEL (average lbs. ultimate)				
	Steel Gauge				
	26	24	22	20	18
9	171	252	329	401	634
12	199	271	360	426	656
10	151	238	291	359	478

Fastener Dia.	PULLOUT VALUES IN WOOD (average lbs. ultimate)				
	Embedment in 2" x 4"				
	1/2"	3/4"	1"	1-1/4"	1-1/2"
9	198	328	571	728	872
12	210	335	-	-	-
10	256	710	753	1121	1358

Corporate Office: 400 Rountree Rd Charlotte, NC 28217  
 TEL: (800) 849-6722 FAX: (704) 525-3761  
 Mailing Address: P.O. Box 240988 Charlotte, NC 28224



Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113  
 TEL: (800) 441-8359 FAX: (901) 775-9449  
 Mailing Address: P.O. Box 13124 Memphis, TN 38113