


PRODUCT SUBMITTAL

WIRE-BOND

Series 300 (4 wire) Truss Mesh

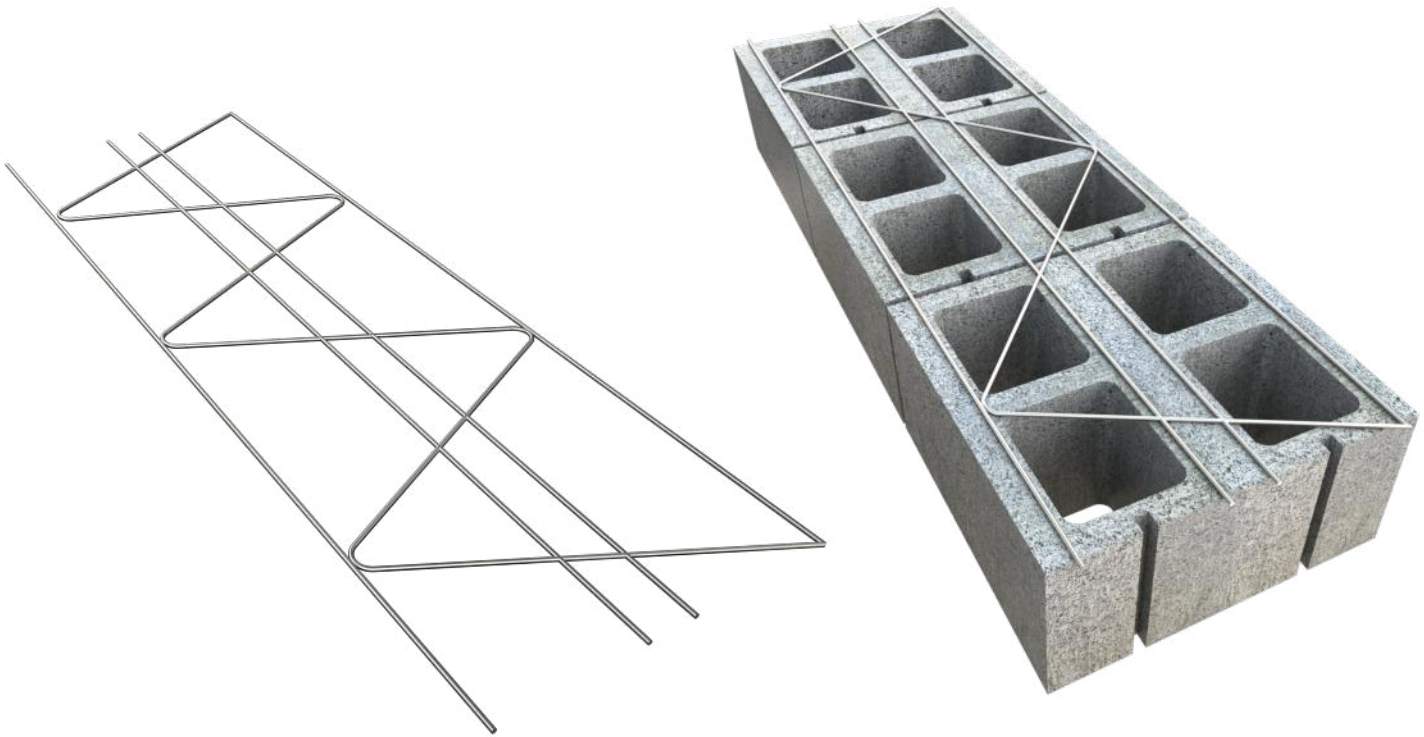

Wire (Carbon Steel): Prefabricated from cold-drawn steel wire conforming to **ASTM A1064/A1064M**

Tensile Strength - 80,000 p.s.i. | Yield Point - 70,000 p.s.i. minimum

ASTM A951/A951M (Standard Specification for Steel Wire for Masonry Joint Reinforcement)

ACI / ASCE 530 (Building Code Requirements for Masonry Structures)

Mill Galvanized coating: **ASTM A641/A641M (0.1 oz/ft)**

Hot-Dip Galvanized after fabrication: **ASTM A153/A153M-B2 (1.5 oz/ft)**

Wire (Stainless Steel): **ASTM A580/ASTM 580M - AISI Type 304**
(Type 316 available on special orders)



Recycled Content:

Mill Galvanized & Hot Dipped,
82.8% Post-Consumer
17% Post Industrial / Pre Consumer

Stainless Steel

97% Pre-Consumer V O C Content - 0%

WIRE SIZE:	SIDE RODS:	CROSS RODS:
Standard	9 Gauge (.148 in)	9 Gauge
Heavy Duty	3/16" (.187 in)	9 Gauge
Extra Heavy Duty	3/16" (.187 in)	3/16"

10' length standard, custom length available special order)

WALL SIZE:

FINISHES:	Mill Galvanized	Hot Dip Galvanized
	Stainless Steel	

Corporate Office: 400 Rountree Rd Charlotte, NC 28217 TEL: (800) 849-6722 FAX: (704) 525-3761



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113 TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 240988 Charlotte, NC 28224

Mailing Address: P.O. Box 13124 Memphis, TN 38113