


# PRODUCT SUBMITTAL




## Sure Tie Tapcon Thermal\* (Wood Framing)

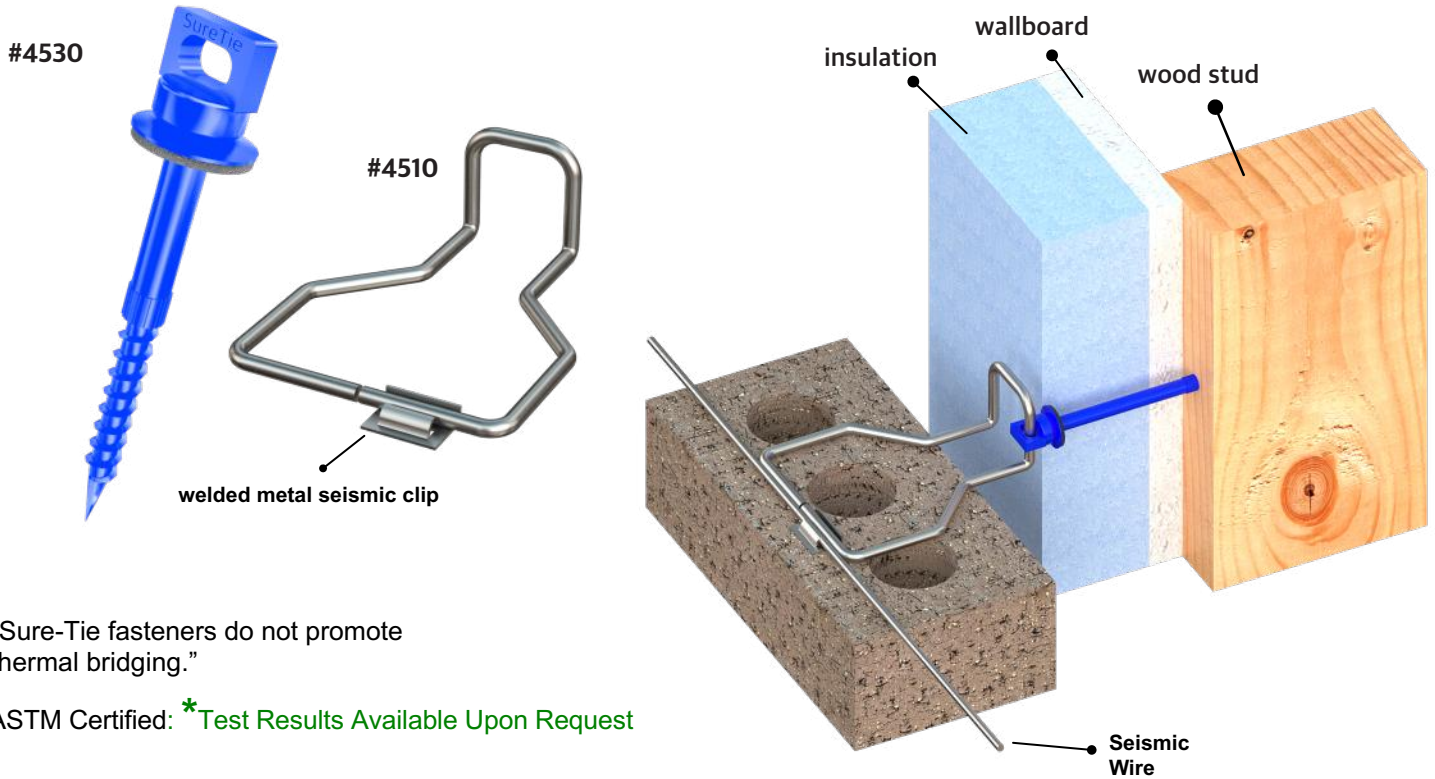

\* "Sure-Tie fasteners do not promote thermal bridging."

ASTM Certified: \*Test Results Available Upon Request

MATERIAL CONFORMANCE	SIZES / FINISHES																			
<p><b>ASTM A1064 / A1064M, A82 / A82M</b> - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p><b>ACI / ASCE 530</b> - (Building code requirements for masonry structures)</p> <p>Hot Dip Galvanized after fabrication / Zinc Coating <b>ASTM A153 / A153M-B2</b> (1.50 oz per sq ft)</p> <p>Stainless Steel <b>ASTM 580 / ASTM 580M Type 304</b> (Type 316 available on special order)</p>	<p><b>#4530 SureTie Tapcon</b> Blue climaseal finish resulted in 0% red rust at 1000 hours exposure to ASTM B-117 salt spray testing.</p> <p><b>Insulation:</b></p> <table border="0"> <tr> <td>0"</td> <td>1"</td> <td>1-1/2"</td> <td>2"</td> <td>2-1/2"</td> </tr> <tr> <td>3"</td> <td>3-1/2"</td> <td>4"</td> <td>4-1/2"</td> <td></td> </tr> </table> <p><b>#4510 Sure Tie Triangle</b> 3/16"</p> <table border="0"> <tr> <td>3"</td> <td>4"</td> <td>5"</td> <td>7"</td> <td>9"</td> <td><b>Wallboard:</b> 5/8"</td> <td>1/2"</td> </tr> </table> <p><b>Straight &amp; Cut seismic wire</b> 9 gauge 3/16"</p> <p><b>FINISH : ( SureTie Triangle)</b></p> <table border="0"> <tr> <td>Hot Dip Galvanized</td> <td>Stainless Steel</td> </tr> </table>	0"	1"	1-1/2"	2"	2-1/2"	3"	3-1/2"	4"	4-1/2"		3"	4"	5"	7"	9"	<b>Wallboard:</b> 5/8"	1/2"	Hot Dip Galvanized	Stainless Steel
0"	1"	1-1/2"	2"	2-1/2"																
3"	3-1/2"	4"	4-1/2"																	
3"	4"	5"	7"	9"	<b>Wallboard:</b> 5/8"	1/2"														
Hot Dip Galvanized	Stainless Steel																			
 <p><b>Recycled Content:</b> Mill Galvanized &amp; Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer,</p> <p>Stainless Steel, 60% Post Consumer V O C Content - 0%</p>																				

Corporate Office: 400 Rountree Rd Charlotte, NC 28217  
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113  
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113