



# PRODUCT SUBMITTAL



## SureTie WS Stone Anchor Z Shape

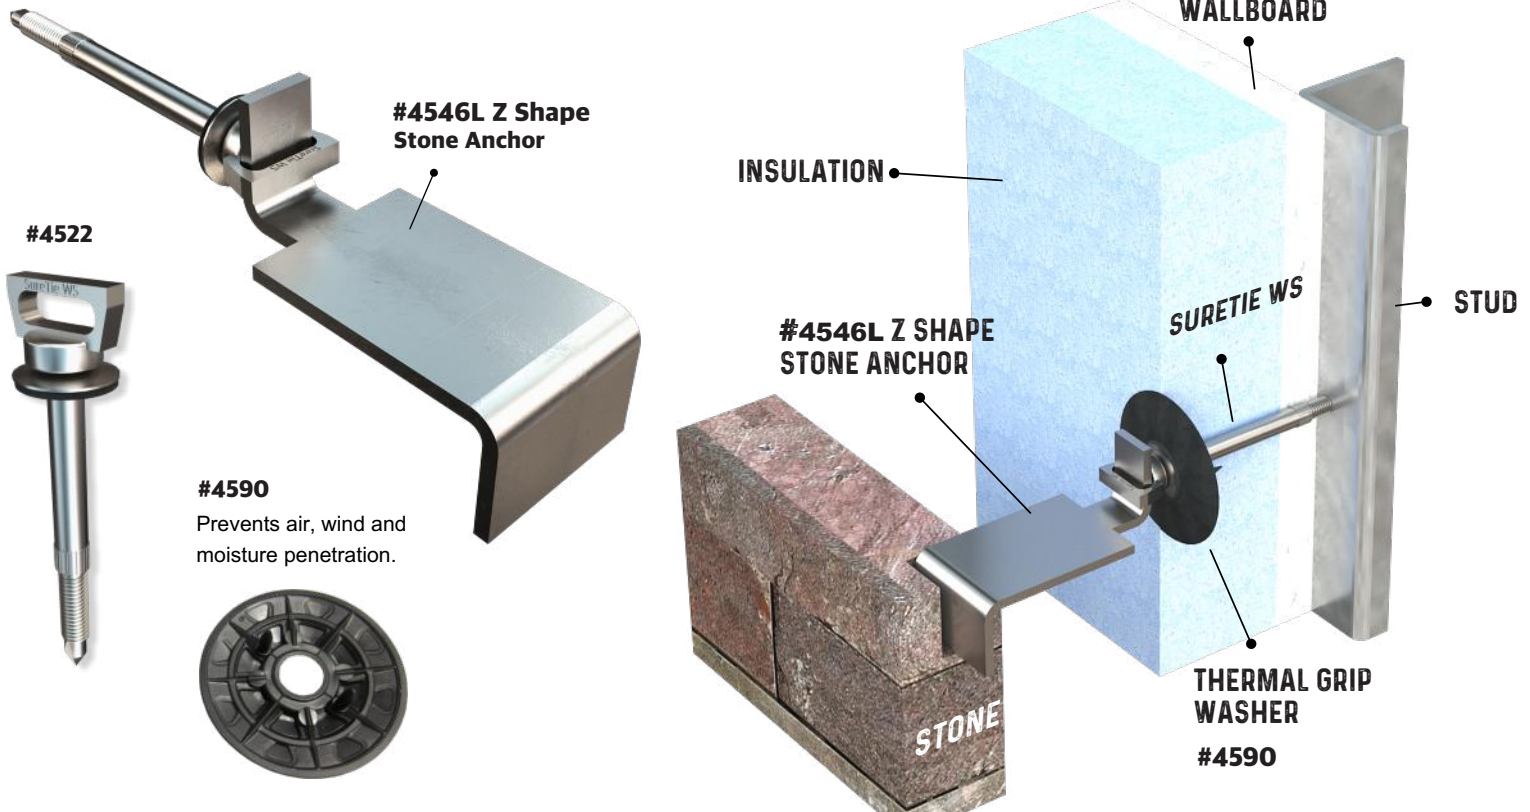

MATERIAL CONFORMANCE	SIZES / FINISHES
<p><b>SHEET METAL - (Carbon Steel) ASTM A1008 / A1008M</b>  <b>ACI / ASCE 530</b> - (Building code requirements for masonry structures)</p> <p>Hot Dip Galvanized after fabrication / Zinc Coating  <b>ASTM A153 / A153M-B2 (1.50 oz per sq ft)</b></p> <p>Sheet Metal (Stainless Steel):  <b>ASTM A666, ASTM A480/480M, and ASTM A240/A240M</b> - AISI Type 304 or Type 316</p> <p><b>Recycled Content:</b>                      Mill Galvanized &amp; Hot Dipped,                      82.8% Post-Consumer                      17% Post Industrial / Pre-Consumer,</p> <p>Stainless Steel,                      60% Post Consumer                      V O C Content - 0%</p> 	<p><b># 4522 SureTie WS</b>                      Silver-gray climaseal finish resulted in 0% red rust at 1000 hours exposure to <b>ASTM B-117</b> salt spray testing.</p> <p><b>Insulation:</b>                      0"   1"   1-1/2"   2"   2-1/2"   3"   3-1/2"   4"   4-1/2"</p> <p><b>#4546L Z Shape SureTie WS Stone Anchor</b>                      1/8" x 1-1/4" wide</p> <p><b>Length:</b></p> <p><b>FINISH : (#4546L Z Shape Stone Anchor)</b>                      Hot Dip Galvanized                      Stainless Steel</p> <p><b>ST/ST Min. Fy = 45,000 p.s.i (ASTM A666)</b></p> <p><b>#4590 Thermal Grip Washer 2" dia.</b>                      washer with solid cap design (no keyholes) Pre-spotting prongs Stiffened center "Bullseye" ring prevents fastener pull-through Flexible perimeter compresses on surface and reduces tearing Flattens on surface of insulation</p>

**Corporate Office:** 400 Rountree Rd Charlotte, NC 28217  
 TEL: (800) 849-6722 FAX: (704) 525-3761

**Mailing Address:** P.O. Box 240988 Charlotte, NC 28224



[www.wirebond.com](http://www.wirebond.com)

**Memphis Plant:** 2365 Harbor Ave. Memphis, TN 38113  
 TEL: (800) 441-8359 FAX: (901) 775-9449

**Mailing Address:** P.O. Box 13124 Memphis, TN 38113