



PRODUCT SUBMITTAL



Sure Tie Anchoring System Thermal (Metal Framing) (- No insulation)

“Sure-Tie fasteners do not create any significant thermal bridging effects on the wall system.”

Test Results Available Upon Request

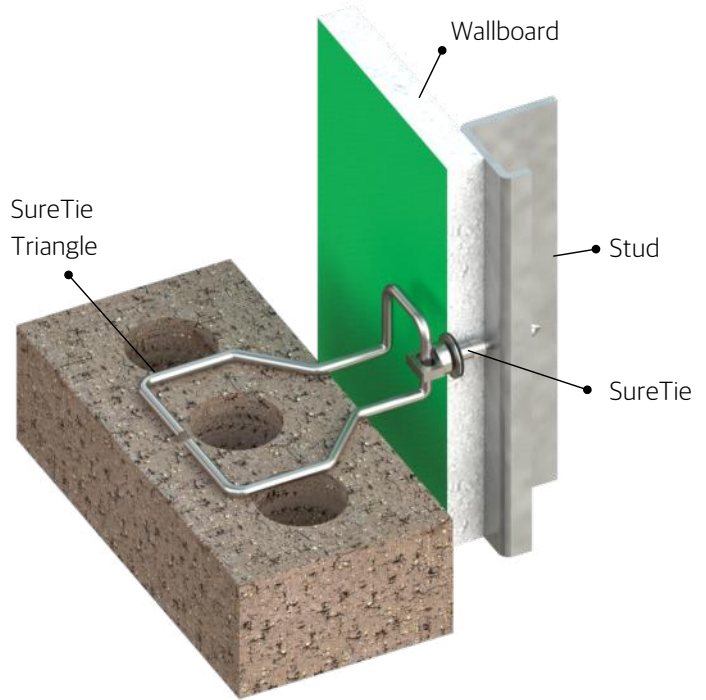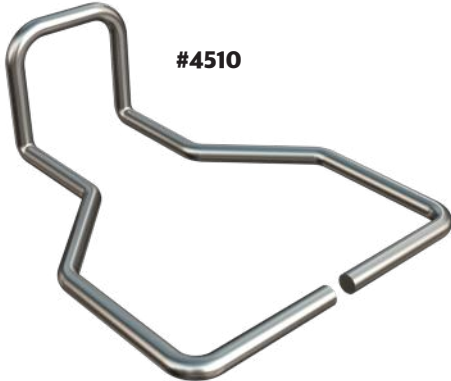

MATERIAL CONFORMANCE	SIZES / FINISHES
<p>ASTM A1064/A1064M, A82 / A82M - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi</p> <p>ACI / ASCE 530 - (Building code requirements for masonry structures)</p> <p>Mill Galvanized / Zinc Coating: ASTM A641 / A641M (0.10 Oz per sq ft)</p> <p>Hot Dip Galvanized after fabrication / Zinc Coating ASTM A153 / A153M-B2 (1.50 oz per sq ft)</p> <p>Stainless Steel ASTM 580 / ASTM 580M Type 304 (Type 316 available on special order)</p>	<p># 4520 Suretie Silver-gray climaseal finish resulted in 0% red rust at 1000 hours exposure to ASTM B-117 salt spray testing.</p> <p>(- No insulation)</p> <p>Wallboard: 5/8" 1/2"</p> <p># 4510 Sure Tie Triangle 3/16" 3" 4" 5" 7" 9"</p> <p>FINISH : (Sure Tie Triangle) Mill Galvanized Hot Dip Galvanized Stainless Steel</p>
<p>Recycled Content: Mill Galvanized & Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer,</p> <p>Stainless Steel, 60% Post Consumer V O C Content - 0%</p>	



Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



www.wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113