
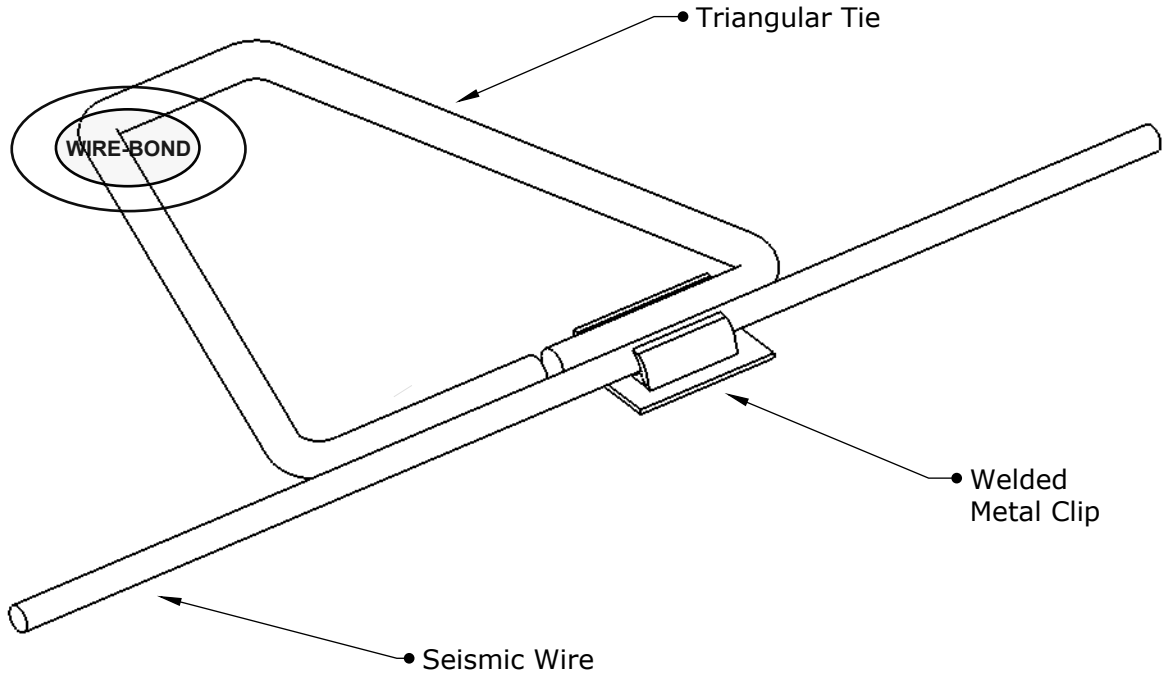


PRODUCT SUBMITTAL

#1100C Triangle (Seismic)

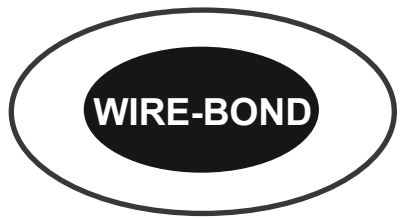

Conforms to building code requirements for masonry structures (**ACI530-05/ASCE5-05/TMS402-05**); seismic performance categories **A-F**.

#1100C Triangle has a welded WIRE-BOND Seismic clip for seismic applications.

MATERIAL CONFORMANCE

Wire (Carbon Steel): Prefabricated from cold-drawn steel wire conforming to **ASTM A1064/A1064M** Tensile Strength - 80,000 psi | Yield Point - 70,000 psi minimum

Wire (Stainless Steel):
ASTM A580/A580M - AISI Type 304 and Type 316

SHEET METAL - (Stainless Steel): ASTM A666, ASTM A480/480M, and ASTM A240/A240M. AISI Type 304 or 316

SHEET METAL - (Carbon Steel): ASTM A1008 / A1008M or ASTM A36/A36M

Hot Dip Galvanized after fabrication / Zinc Coating:
ASTM A153/A153M Class B (1.5 oz/ft²)

Mill Galvanized / Zinc Coating: **ASTM A641 / A641M**
(0.1 0 Oz per sq ft)

Stainless Steel,
60% Post Consumer
V O C Content - 0%

Recycled Content:
Hot Dipped,
82.8% Post-Consumer
17% Post Industrial / Pre-Consumer,



Triangle Length:

- | | | |
|----|----|-------------|
| 3" | 4" | 5" |
| 6" | 7" | Other _____ |

Straight & Cut Seismic Wire:

- | | |
|---------|--------|
| 9 Gauge | 3/16"Ø |
|---------|--------|

WIRE-BOND welded seismic clip :

16 gauge standard

FINISH:

- | | |
|--------------------|---------------------------|
| Mill Galvanized | Stainless Steel: Type 304 |
| Hot Dip Galvanized | Stainless Steel: Type 316 |

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224



wirebond.com

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-94

Mailing Address: P.O. Box 13124 Memphis, TN 38113