


# PRODUCT SUBMITTAL



## # 1100 Triangular Tie Seismic

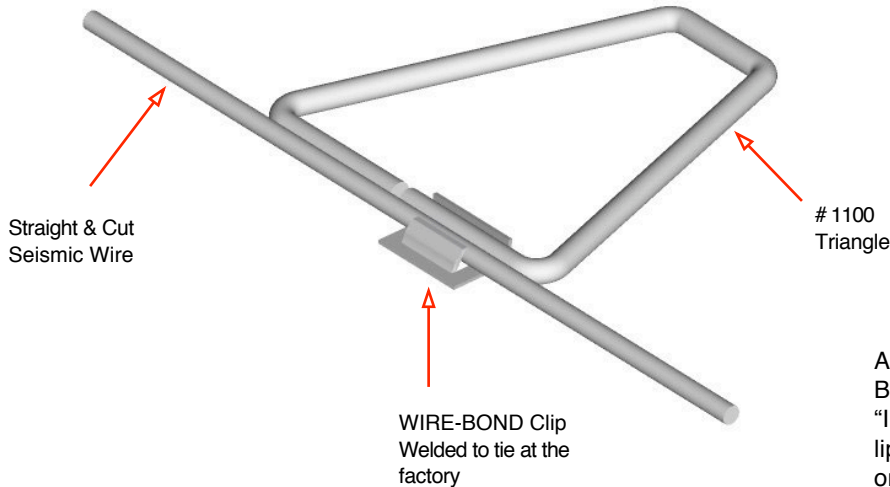

All WIRE-BOND® seismic products meet Uniform Building Code requirements listed in 1403.6.4.2. "In seismic zones A – F, wall ties shall have a lip or hook on the extended leg that will engage or enclose a horizontal joint reinforcement wire having a diameter of 0.148 inch (3.76mm) (No. 9 B.W. gauge) or equivalent. The joint reinforcement shall be continuous with butt splices between ties permitted."

MATERIAL CONFORMANCE		SIZES / FINISHES	
<b>ASTM A82 / A82M</b> - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi  <b>ACI / ASCE 530</b> - (Building code requirements for masonry structures)  <b>SHEET METAL</b> - (Carbon Steel) <b>ASTM A1008 / A1008M</b>  Mill Galvanized / Zinc Coating: <b>ASTM A641 / A641M (0.10 Oz per sq ft)</b> Hot Dip Galvanized after fabrication / Zinc Coating <b>ASTM A153 / A153M-B2 (1.50 oz per sq ft)</b> Stainless Steel <b>ASTM 580 / ASTM 580M Type 304</b> (Type 316 available on special order)		<b># 1100 Triangle Diameter:</b> <input type="checkbox"/> 3/16"Ø <input type="checkbox"/> 1/4"Ø  <b># 1100 Triangle Size:</b> <input type="checkbox"/> 3" x 3" <input type="checkbox"/> 6" x 6" <input type="checkbox"/> 4" x 4" <input type="checkbox"/> 7" x 7" <input type="checkbox"/> 5" x 5" <input type="checkbox"/> 7" x 9" <input type="checkbox"/> Other _____	
<b>Steel Products (flats):</b> Mill Galvanized & Hot Dip, 59.2% Post-Consumer 8.8% Post Industrial / Pre - Consumer  Stainless Steel, 60% Post Consumer V O C Content - 0%	<b>WIRE Recycled Content:</b> Mill Galvanized & Hot Dip, 85% Post-Consumer 13% Post Industrial / Pre - Consumer  Stainless Steel, 60% Post Consumer V O C Content - 0%	<b># WIRE BOND Clip:</b> 16 gauge  <b>Finishes:</b> <input type="checkbox"/> Mill Galvanized <input type="checkbox"/> Hot Dip Galvanized <input type="checkbox"/> Stainless Steel	<b>Straight &amp; Cut Seismic Wire:</b> 10'-0" Lengths <input type="checkbox"/> 9 gauge <input type="checkbox"/> 3/16" diameter



**Corporate Office:** 400 Roundtree Rd Charlotte, NC 28217  
 TEL: (800) 849-6722 FAX: (704) 525-3761

**Mailing Address:** P.O. Box 240988 Charlotte, NC 28224



[www.wirebond.com](http://www.wirebond.com)

**Memphis Plant:** 2365 Harbor Ave. Memphis, TN 38113  
 TEL: (800) 441-8359 FAX: (901) 775-9449

**Mailing Address:** P.O. Box 13124 Memphis, TN 38113