



# PRODUCT SUBMITTAL

**WIRE-BOND**

## #1000 Type I Weld-On Anchor

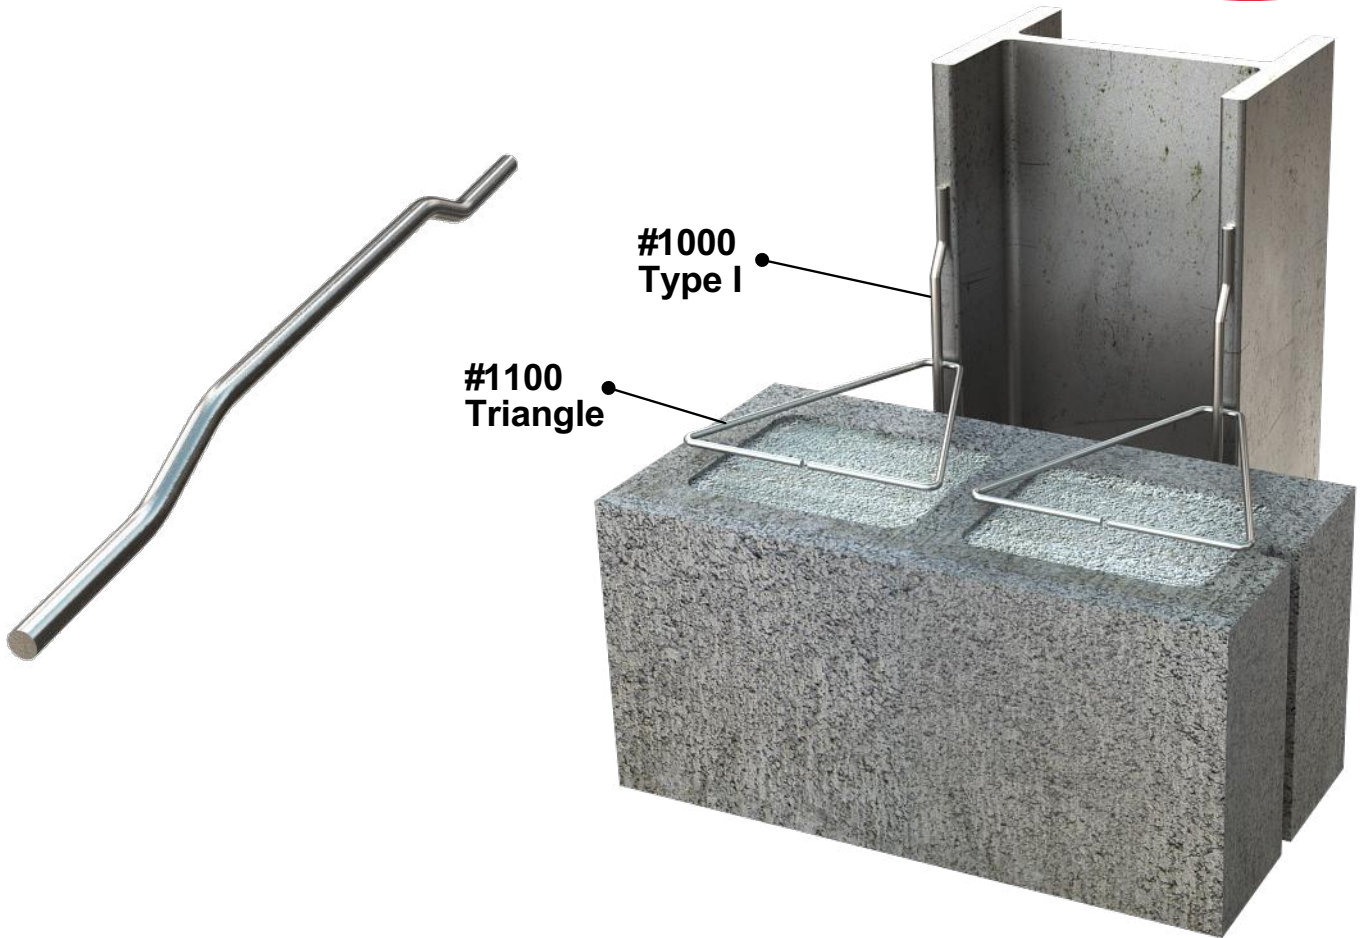

MATERIAL CONFORMANCE	SIZES / FINISHES
<p>Wire (Carbon Steel): Prefabricated from cold-drawn steel wire conforming to <b>ASTM A1064/A1064M, ASTM A82/ A82M</b></p> <p>Tensile Strength - 80,000 p.s.i.   Yield Point - 70,000 p.s.i. minimum</p> <p><b>ASTM A951/A951M</b> (Standard Specification for Steel Wire for Masonry Joint Reinforcement)</p> <p><b>ACI / ASCE 530</b> (Building Code Requirements for Masonry Structures)</p> <p>Hot-Dip Galvanized after fabrication: <b>ASTM A153/A153M-B2 (1.5 oz/ft)</b></p> <p>Wire (Stainless Steel): <b>ASTM A580/ASTM 580M - AISI Type 304</b> (Type 316 available on special orders)</p> <p><b>Recycled Content:</b> Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre Consumer</p> <p><b>Stainless Steel</b> 97% Pre-Consumer V O C Content - 0%</p> 	<p><b>#1000 Type I Weld-On:</b></p> <p>1/4" dia. x 5"                      1/4" dia. x 9"</p> <p><b># 1100 Triangle:</b></p> <p>3/16" diameter standard</p> <p>3" x 3"            4" x 4"            5" x 5"</p> <p>6" x 6"            7" x 9"            9" x 9"</p> <p><b>Finishes:</b></p> <p>Mill Galvanized                  Hot Dip Galvanized                  Stainless Steel</p>

**Corporate Office:** 400 Rountree Rd Charlotte, NC 28217  
TEL: (800) 849-6722 FAX: (704) 525-

3761  
**Mailing Address:** P.O. Box 240988 Charlotte, NC 28224

**WIRE-BOND**

[www.wirebond.com](http://www.wirebond.com)

**Memphis Plant:** 2365 Harbor Ave. Memphis, TN 38113  
TEL: (800) 441-8359 FAX: (901) 775-9449

**Mailing Address:** P.O. Box 13124 Memphis, TN 38113