PRODUCT SUBMITTAL

1004X Type III X Screw On Veneer Anchor

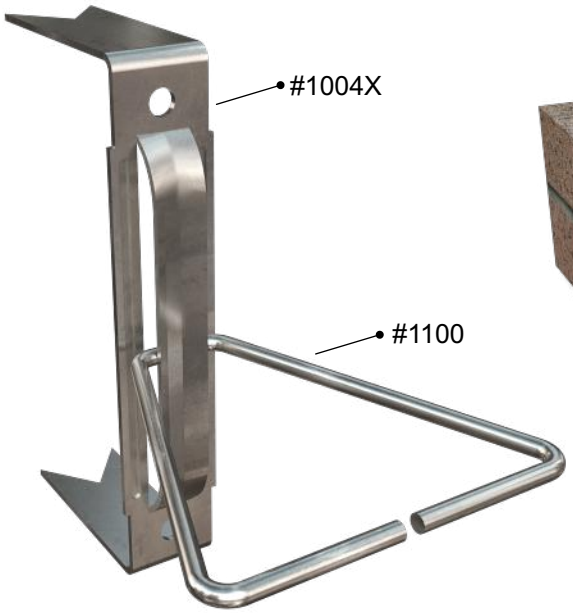

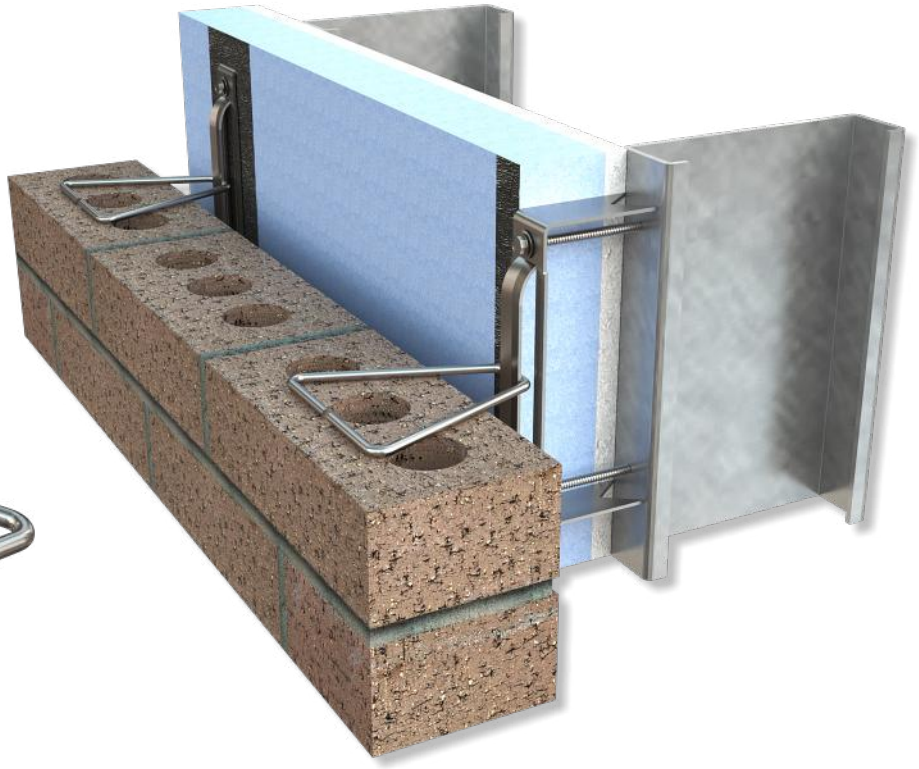

MATERIAL CONFORMANCE	SIZES / FINISHES
ASTM A1064/A1064M, ASTM A82 / A82M - (Cold drawn steel wire) Tensile Strength - 80,000 psi Yield Point - 70,000 psi **ACI / ASCE 530** - (Building code requirements for masonry structures) **SHEET METAL** - (Carbon Steel) **ASTM A1008 / A1008M** Mill Galvanized / Zinc Coating: **ASTM A641 / A641M (0.10 0z per sq ft)** Hot Dip Galvanized after fabrication / Zinc Coating **ASTM A153 / A153M-B2 (1.50 oz per sq ft)** Stainless Steel **ASTM 580 / ASTM 580M Type 304** (Type 316 available on special order) **Recycled Content:** Mill Galvanized & Hot Dipped, 82.8% Post-Consumer 17% Post Industrial / Pre-Consumer, Stainless Steel, 60% Post Consumer V O C Content - 0%	**#1004X : 1-¼″ wide x 6″ long** ☐ 14 gauge ☐ 12 gauge (Prong length to accommodate insulation) **For Gypsum sheathing:** ☐ ⅝″ ☐ ½″ **Insulation:** ☐ 1″ ☐ 1 ½″ ☐ 2″ ☐ 2 ½″ ☐ 3″ ☐ 3 ½″ ☐ 4″ **#1100 Triangle:** ☐ 3/16″ dia. ☐ ¼″ dia. **Length:** ☐ 3″ ☐ 4″ ☐ 5″ ☐ 7″ ☐ 9″ **Finish:** ☐ Mill Galvanized ☐ Hot Dipped ☐ Stainless Steel

Corporate Office: 400 Rountree Rd Charlotte, NC 28217
TEL: (800) 849-6722 FAX: (704) 525-3761

Mailing Address: P.O. Box 240988 Charlotte, NC 28224

Memphis Plant: 2365 Harbor Ave. Memphis, TN 38113
TEL: (800) 441-8359 FAX: (901) 775-9449

Mailing Address: P.O. Box 13124 Memphis, TN 38113

www.wirebond.com