



MasterFormat: 03 39 23

JUNE 2021  
(Supersedes April 2018)

# FIBRE EXPANSION JOINT

## Multi-Purpose, Expansion-Contraction Joint Filler

### DESCRIPTION

FIBRE EXPANSION JOINT is composed of cellular fibers securely bonded together and uniformly saturated with asphalt to assure longevity. Wherever a cost-effective joint filler is required, FIBRE EXPANSION JOINT meets the need. Manufactured and marketed by W. R. MEADOWS since the early 1930s, FIBRE EXPANSION JOINT is backed by over 90 years of proven application experience. FIBRE EXPANSION JOINT is versatile, resilient, flexible, and non-extruding. When compressed to half of its original thickness, it will recover to a minimum of 70% of its original thickness. FIBRE EXPANSION JOINT will not deform, twist, or break with normal on-the-job handling. Breakage, waste, and functional failure resulting from the use of inferior, foreign fiber materials can cost you time and dollars and can result in a substandard finished job, generating costly callbacks and rework expenses. However, the purchase and installation of FIBRE EXPANSION JOINT (a small segment of the total project's cost) contributes to both the final cost efficiency and functional success, far greater in proportion than its original cost.

Representative United States patents: USPNs 7,815,722; 8,057,638; 8,038,845; and D558,305. (See also [www.wrmeadows.com/patents](http://www.wrmeadows.com/patents) for further patent/intellectual property information.)

### USES

FIBRE EXPANSION JOINT is ideal for use on highways, streets, airport runways, sidewalks, driveways, flatwork, and scores of commercial and industrial applications subject to pedestrian and vehicular traffic.

### FEATURES/BENEFITS

- Provides the ideal product for the majority of all expansion/contraction joint requirements.
- Non-extruding ... versatile ... offers a minimum 70% recovery after compression.
- This tough, lightweight, easy-to-use, semi-rigid joint filler is available in strips and shapes fabricated to your requirements.
- Easy to cut ... dimensionally stable ... not sticky in summer or brittle in winter.
- Provides neat, finished joints requiring no trimming.
- Often copied ... but never equaled.
- Remains the standard of the industry today ... with over 90 years of proven and satisfactory performance.
- Can be punched for dowel bars and laminated to thicknesses greater than 1" (25.4 mm).




### SPECIFICATIONS AND SIZE INFORMATION

Conforms to or meets:	Thickness	Slab Widths	Standard Lengths	Weight per ft. <sup>3</sup>
<ul style="list-style-type: none"> <li>▪ AASHTO M 213</li> <li>▪ ASTM D1751</li> <li>▪ Corps of Engineers CRD-C 508</li> <li>▪ FAA Specification Item P-610-2.7</li> <li>▪ HH-F-341 F, Type 1</li> </ul>	3/8", 1/2" 3/4", 1" (9.5, 12.7, 19.1, 25.4 mm)	36", 48" (.91, 1.22 m)	10' (3.05 m) Also available: 5', 6', 12' (1.5, 1.83, 3.66 m)	>19 lb.

CONTINUED ON REVERSE SIDE ...

**W. R. MEADOWS, INC.**  
 P.O. Box 338 • HAMPSHIRE, IL 60140-0338  
 Phone: 847/214-2100 • Fax: 847/683-4544  
 1-800-342-5976  
[www.wrmeadows.com](http://www.wrmeadows.com) • [info@wrmeadows.com](mailto:info@wrmeadows.com)

HAMPSHIRE, IL / CARTERSVILLE, GA / YORK, PA  
 FORT WORTH, TX / BENICIA, CA / POMONA, CA  
 GOODYEAR, AZ / MILTON, ON / SHERWOOD PARK, AB

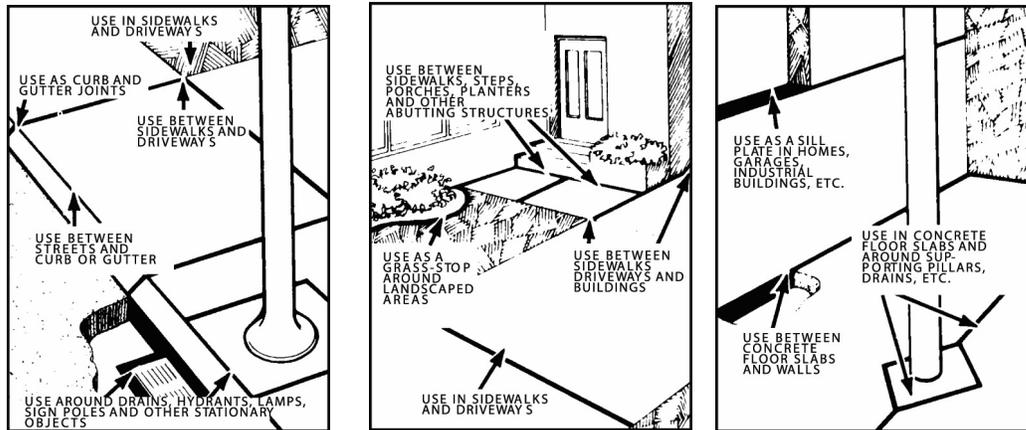

## APPLICATION

FIBRE EXPANSION JOINT is positioned against the forms, at interrupting objects or columns, and against abutting structures prior to the placement of concrete. FIBRE EXPANSION JOINT should be installed 1/2" (12.7 mm) below the concrete surface to accept a joint sealant which will provide for maximum protection from water infiltration and weathering, in addition to keeping the joint free from incompressibles. SNAP-CAP® from W. R. MEADOWS is recommended to create the reservoir for the joint sealant and the use of POURTHANE® SL, POURTHANE NS, or DECK-O-SEAL® as the sealant to protect the joint. Before sealing, slide SNAP-CAP over the top of the expansion joint. Place the concrete and screed to finish grade, as usual. When concrete is cured, insert a screwdriver through the top of SNAP-CAP, pull free and discard. In applications where one of the above-mentioned joint sealants is used without SNAP-CAP, W. R. MEADOWS recommends the use of KOOL-ROD™ or a bond-breaker tape to isolate FIBRE EXPANSION JOINT from the joint sealant material. SOF-SEAL® or any hot-applied sealant, such as HI-SPEC®, can be used to protect the joint. In this case, the use of SNAP-CAP, KOOL-ROD, or a bond-breaker tape is not necessary. Simply apply the sealant directly over FIBRE EXPANSION JOINT.

For most current data sheet, LEED information, and SDS, visit [www.wrmeadows.com](http://www.wrmeadows.com).



### LIMITED WARRANTY

W. R. MEADOWS, INC. warrants at the time and place we make shipment, our material will be of good quality and will conform with our published specifications in force on the date of acceptance of the order. Read complete warranty. Copy furnished upon request.

### Disclaimer

The information contained herein is included for illustrative purposes only, and to the best of our knowledge, is accurate and reliable. W. R. MEADOWS, INC. cannot however under any circumstances make any guarantee of results or assume any obligation or liability in connection with the use of this information. As W. R. MEADOWS, INC. has no control over the use to which others may put its product, it is recommended that the products be tested to determine if suitable for specific application and/or our information is valid in a particular circumstance. Responsibility remains with the architect or engineer, contractor and owner for the design, application and proper installation of each product. Specifier and user shall determine the suitability of products for specific application and assume all responsibilities in connection therewith.