





HYDRALASTIC™ 836

A Superior Cold-Applied, Single-Component Waterproofing Compound

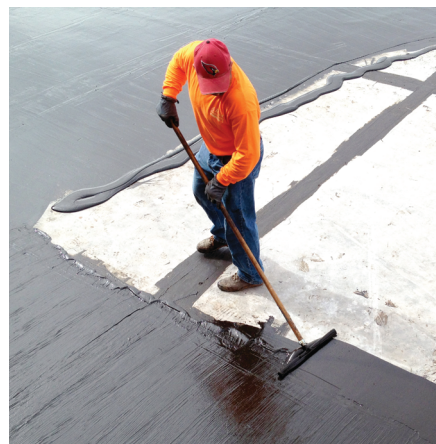

HYDRALASTIC 836 keeps water where it belongs – whether it's applied inside, outside, horizontally or vertically! Designed with specifiers and end users in mind, this cold-applied, 98% solids, single-component compound is ideal for positive side waterproofing for foundations and in between-slab applications.


follow us:

 @wrmeadows

 facebook.com/wrmeadows

 w-r-meadows-inc

 wrmeadowsinc

 YouTube wrmeadowsinc

#wrmeadows

HYDRALASTIC 836 is fast curing, low odor, solvent-free, resistant to early rainfall and able to withstand temperature extremes without cracking, shrinking or slumping. Suitable for both above- and below-grade applications, HYDRALASTIC 836 offers superior performance along with a variety of other benefits:

- Bonds to concrete, asphalt, wood, metal – may be applied to green concrete.
- Compatible with asphalt protection boards.
- Easy application translates to time and labor savings.
- Excellent elasticity and rebound characteristics.
- 98% high solids formulation means no shrinkage and increased coverage as compared to competitive products.
- No blisters due to solvent outgassing.
- No primer required.*
- Extremely low odor.
- Will not harm EPS or styrofoam materials.
- Meets ASTM C836.

*See data sheet for further information.

For more information on **HYDRALASTIC 836** visit www.wrmeadows.com or call **1-800-342-5976**.



W. R. MEADOWS
SEALTIGHT

A Family Company Since 1926
QUALITY...SERVICE...INTEGRITY