


## P76 Utility Anchor<sup>®</sup> Setting Plugs

Utility Anchor Setting Plugs are polyurethane plastic in 90° and 45° orientation. The reusable setting plug properly sets the anchor approximately 1/2" below the surface of the concrete and provides an adequate recess for easy sling attachment. After final positioning of the concrete element, the recess formed by the recess member can be easily grouted or conveniently covered by the Utility Anchor Cover/Patch.

The 90P875 Setting Plug used with the P75H 24,000 lb. anchor requires 2 each P101 holding rods to attach setting plug to the form. No holding plate or magnetic plate are available for this setting plug.

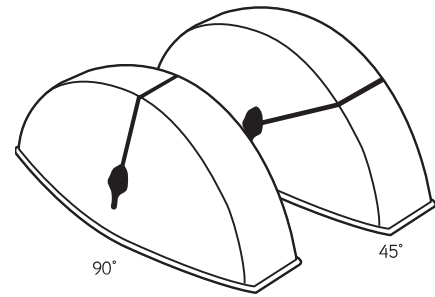

**P76 Utility Anchor Setting Plugs**

### P76 Utility Anchor Setting Plug

Type	Product Code No.	Length	Depth	Width	Color
90P444	123175	8.00"	3.25"	3"	Blue
45P444	123176	8.00"	3.25"	3"	Blue
90P671	123177	8.00"	3.25"	3"	Orange
90P671	127786	9.00"	4.58"	3.35"	Orange
45P671	123178	8.00"	3.25"	3"	Orange
90P875	124685	15.00"	6.13"	5"	Blue

Utility Anchor Lifting System

## P76D Disposable Setting Plugs

The Disposable Setting Plug is manufactured to offer the precastor an inexpensive alternate to urethane setting plugs. This 2 piece high density polyethylene plastic setting plug is used with the 0.671 Dayton Superior Utility Anchors. The two piece design snaps tightly together around the legs of the anchor eliminating concrete entering the void. The setting plug is installed to the formwork using nail holes on each end of the plug.



**P76D Disposable Utility Anchor Setting Plugs 0.671**

### To Order:


Specify: (1) quantity, (2) name, (3) product code.

### Example:

200, P76 Utility Anchor Setting Plugs, 90P444.

## P76C Utility Anchor Cover/Patch

The P76C Utility Anchor Cover/Patch installs over the back of the setting plug to protect the unit without the use of duct tape. The cover/patch can be installed on the setting plug/anchor assembly prior to setting the assembly in the form. This protects the assembly from concrete leakage through the concrete placement sequence. It can also be used later as a temporary or permanent cover for the recess. The P76C cover is gray in color and will blend with most concrete. It can be painted to match other color schemes.

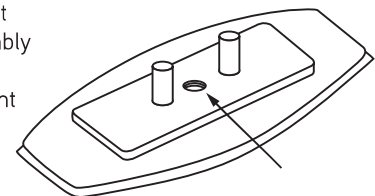

**P76C Utility Anchor Cover/Patch**

### To Order:

Specify: (1) quantity, (2) name, (3) product code.

### Example:

200, P76D, #126214.



**Note:** The P76C does not work with the P76 type 90P671 (PN: 127786) or 90P875 (PN: 124685) setting plugs.