


# WASHERS

## DP500 Tab Washer Great for Lath & Stucco



- G90 Chromium Plated
- Meets ASTM A653 Standard
- Pre-Spot Tabs • 1 1/4" Diameter Plate
- Can be Screwed, Nailed or Shot
- Works Well with Multiple Substrates
- Covers Many Rigid Insulation Applications

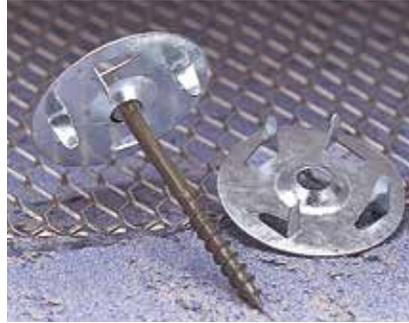

Item #	Qty Per Box	Approx. Wt
DP500	1,000	6 lbs

## Foam Tack Fastener Holds Foam to Foam

Item #	Description
TAC75	3/4" Trim to Foam Trim Tac (Pak of 250)
TAC112	1 1/2" Foam to Foam Insul Tac (Pak of 250)
TAC134	1 3/4" Foam to Foam Arrow Tac (Pak of 250)

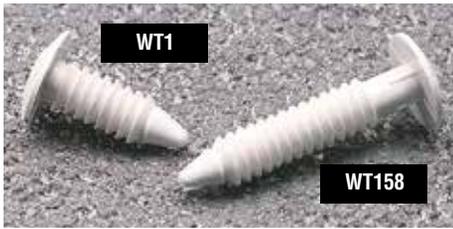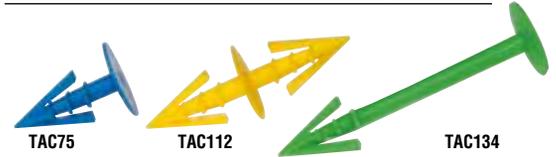

## Wall Tac™ Holds Trim & Joints

- Holds Trim to Foam
- Mechanically Attaches Control Joint to Substrate Foam Insulation
- Allows Control Joints to Move with Foam Insulation

Item #	Size	Qty Per Box	Approx. Wt
WT1	1"	1,000	3 lbs
WT158	1 5/8"	1,000	5 lbs



## DP525 Washer Plaster Repair Washers

- Grip-Guard™ Galvalume Coated Steel
- Helps Stabilize and Re-Support Old Plaster
- 1 1/4" Diameter Plate
- .023 to .025 Gauge with 4 Keyholes
- Edges Taper Toward Work Area
- Tapered Edge Will Not Catch Trowel Edge

Item #	Qty Per Box	Approx. Wt
DP525-1	100	1 lb
DP525	1,000	6 lbs



## EPS Foam Auger Anchor Spiral Anchoring to EIFS

- For Downspouts, Lights, Fixtures, etc.
- High-Strength Plastic Construction with Foam Washer
- 1 1/2" Deep x 1" Wide, 1/8" Foam Washer
- No Thermal Bridging
- Can Be Installed with Commercial Drill

Item #	Qty Per Box	Approx. Wt
SD10	10	1 lb

## WINDLOAD SPECS FOR PB, PBH, DP300 & DP400 WASHERS

Testing was performed by Underwriters Laboratories per ASTM E330 and E331. Procedure B.



### Demand PB Washer & PBH Washers

**Fastener Pull-Through Results**  
in Average Pounds Ultimate

Tapcon	Dec-King	S-12
401	410	427

**Insulation Pull-Over Results**  
in Aver. Pounds Ultimate (1 Lb Density EPS)

1"	1 1/2"	2"
85.6	93.6	108

The 2" diameter increases wind-load resistance and has 25% more pullover value than 1 3/4" washers. Structural performance tests conducted with ASTM E-330. Average ultimate negative load was -97 PSF.



### DP300 Washers

#### SPECIFICATIONS:

Diameter: 1 3/4"  
Material: Polypropylene  
Push Through @ 10° 256 lbs.  
Push Through @ 180° 177 lbs.  
Pull Over 50.8 lbs. @ 10°  
Pull Over 122.4 lbs. @ 180°



### DP400 Washers

#### SPECIFICATIONS:

Diameter: 1 3/4"  
Material: Polypropylene  
Push Through @ 10° 256 lbs.  
Push Through @ 180° 177 lbs.  
Pull Over 50.8 lbs. @ 10°  
Pull Over 122.4 lbs. @ 180°